

# ARTESYN AXA SERIES

25 Watts



Advanced Energy's Artesyn AXA series of low-input isolated DC-DC converters features an ultra wide 4:1 input voltage range of 9–36 Vdc and is designed primarily for use with nominal 12 V or 24 V supplies. There is a choice of five single output models, offering voltages of 3.3 V, 5 V, 12 V, 15 V or 24 V, and two dual output models offering +12/-12 V or +15/-15 V. The converters are fully encapsulated in a compact 1 x 1 inch (25.4 x 25.4 mm) metal case incorporating an isolated baseplate and have a height of just 0.4 inch (10.2 mm). An optional clip-on heatsink is available for convection cooling. Standard features include 1,500 Vdc input/output isolation, remote On/Off and hiccup mode short-circuit protection

## DATA SHEET

### Total Power:

25 W

### Input Voltage:

24 or 48 V

### # of Outputs:

Single and Dual

## SPECIAL FEATURES

- Package size 1.0" x 1.0" x 0.4"
- Ultra-wide 4:1 input range:  
9 - 36 Vin, 18 - 75 Vin
- Very high efficiency up to 90%
- Operating temperature range: -40 °C  
to +80 °C (with derating)
- Output voltage adjustable
- I/O isolation voltage 1500 Vdc
- Remote ON/OFF control
- Metal case with isolated baseplate
- CSA/UL/IEC/EN 60950-1 Safety  
Approval

## SAFETY

- UL/cUL/IEC/EN 62368-1 (60950-1)  
Safety Approval & CE Marking

**ELECTRICAL SPECIFICATIONS**

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	90% @ 12 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.2%
Load regulation	±1.0%
Noise/ripple	150 mV
Overload protection	150% typ of Io max, hiccup
Short circuit protection	Hiccup mode
Switching frequency	285 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	2000 pF


**ENVIRONMENTAL SPECIFICATIONS**

Operating ambient temperature range	-40 °C to +80 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	444 Khrs calculated

**ORDERING INFORMATION**

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Max Out Cap	Power
AXA06F18-L	9 - 36 Vdc	3.3 V	6 A	87%	10300 µF	19.8 W
AXA05A18-L	9 - 36 Vdc	5 V	5 A	89%	6800 µF	25 W
AXA02B18-L	9 - 36 Vdc	12 V	2.09 A	89%	1200 µF	25 W
AXA02C18-L	9 - 36 Vdc	15 V	1.67 A	90%	750 µF	25 W
AXA01BB18-L	9 - 36 Vdc	±12 V	±1.04 A	89%	680 µF	25 W
AXA01CC18-L	9 - 36 Vdc	±15 V	±0.84 A	89%	380 µF	25 W
AXA06F36-L	18 - 75 Vdc	3.3 V	6 A	88%	10300 µF	19.8 W
AXA05A36-L	18 - 75 Vdc	5 V	5 A	90%	6800 µF	25 W
AXA02B36-L	18 - 75 Vdc	12 V	2.09 A	90%	1200 µF	25 W
AXA02C36-L	18 - 75 Vdc	15 V	1.67 A	90%	750 µF	25 W
AXA01BB36-L	18 - 75 Vdc	±12 V	±1.04 A	89%	680 µF	25 W
AXA01CC36-L	18 - 75 Vdc	±15 V	±0.84 A	89%	380 µF	25 W

**MECHANICAL DIMENSIONS**

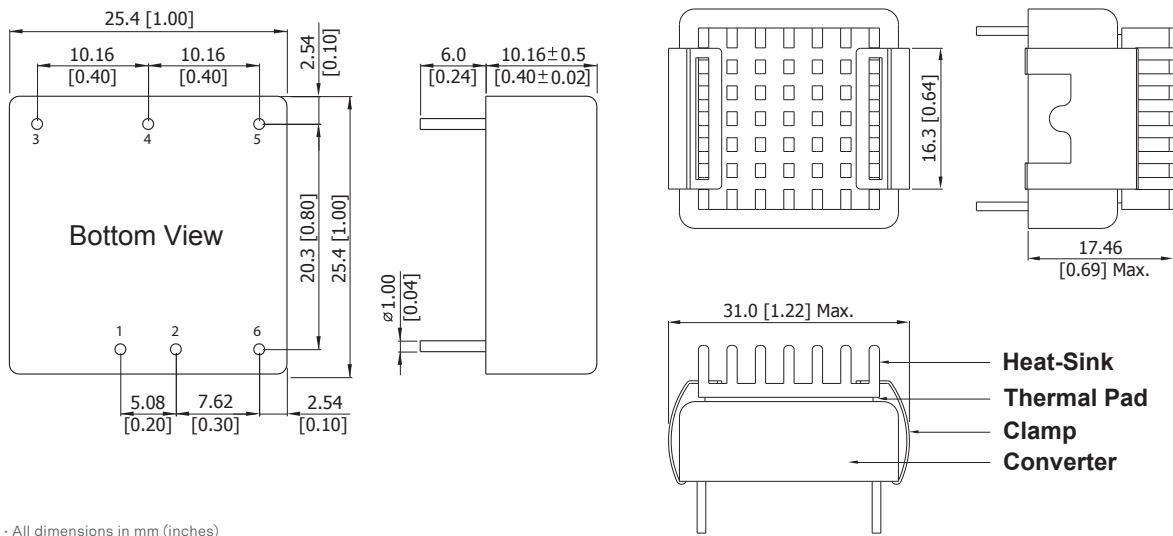

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- Pin diameter Ø 1.0 ±0.05 (0.04±0.002)

Pin Connections		
Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Isolated DC/DC Converters](#) category:*

*Click to view products by [Artesyn Embedded Technologies](#) manufacturer:*

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)  
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)  
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)  
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)  
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)