

CXA20 Series

Single and dual output

- **4:1 input voltage range**
- **No minimum load on singles**
- **6 A on 3.3 V output (@ 48 Vin) at 50 °C in still air**
- **Wide operating temperature with overtemperature protection**
- **±10% output voltage trim**
- **Remote On/Off control**
- **Overvoltage protection**
- **Available RoHS compliant**



The CXA20 is a new 20 W addition to the CXA family of open-frame, isolated, dc-dc converters. The five model series features a 4:1 input voltage range of 18 Vdc to 75 Vdc, making it suitable for a wide variety of communications and distributed power applications. With its 2.0 x 1.6 inch industry standard footprint, the CXA20 provides an easy upgrade option for new and existing Artesyn customers seeking a high-performance, cost-effective power supply. The CXA20 is available in output voltages of 3.3 V, 5 V, 12 V, ±5 V and ±12 V. The 3.3 V version delivering up to 6 A is fully rated to 20 W. Typical efficiency for the CXA20 is 83%. The CXA20 offers remote ON/OFF as well as overvoltage, overtemperature and short circuit protection features.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

| | | |
|--|---|--|
| Voltage accuracy | | ±1.0% |
| Line regulation (LL to HL) | Singles/dual positives Dual negatives | ±0.1% ±0.1% |
| Load regulation (not incl. cross reg.) | Full load to minimum load S3V3 Singles/dual positives Dual negatives | ±0.2% ±0.1% ±0.1% |
| Minimum load | Singles Duals (for imbalanced loads) | None 10% |
| Ripple and noise 20 MHz bandwidth | S3V3, S05, D05 S12, D12 All models | 75 mV pk-pk max. 100 mV pk-pk max. 20 mV rms max. |
| Temperature coefficient | | ±0.02%/°C |
| Overvoltage protection | | See Application Note 107 |
| Short circuit protection Short <20 mΩ | Hiccup Continuous automatic recovery | |
| Transient response | 25% load step | ±2.0% max. dev., 300 μs recovery to within total error band |
| Load cross regulation (See Note 1) | 10% load to full load, either output | ±7.0% |

INPUT SPECIFICATIONS

| | | |
|------------------------------------|-------------------------|-----------|
| Input voltage range | 48 Vin nominal | 18-75 Vdc |
| Input fuse | HRC recommended | 2.0 A |
| Max. input rise and fall time | 48 V ETS300-132 | 5 V/ms |
| UVLO turn ON voltage (See Note 4) | | 92% |
| UVLO turn OFF voltage (See Note 4) | | 86% |
| Remote ON/OFF Logic compatibility | CMOS/TTL/Open Collector | |
| ON | Open circuit or >2 Vdc | |
| OFF | <1.2 Vdc | |

EMC CHARACTERISTICS

| | | |
|--------------------------|---|--------------------|
| ETS 300 386-1 table 5 | | |
| Conducted emissions | EN55022, ext. cap. (Note 5) EN55022, external filter, VDE0878, 48V models | Level A Level B |
| Radiated emissions | EN55022-B | See App. Note 107 |
| Immunity: | | |
| ESD air | EN61000-4-2 8 kV (NP), 15 kV (RP) | |
| ESD contact | EN61000-4-2 6 kV (NP), 8 kV (RP) | |
| EFT DC power | EN61000-4-4 2 kV (NP), 4 kV (LFS) | |
| EFT signal | EN61000-4-4 1 kV (NP), 2 kV (LFS) | |
| Radiated field enclosure | EN61000-4-3 10 V/m (NP) | |
| Surges indoor signal | EN61000-4-5 500 V (RP) | |
| Conducted (dc power) | EN61000-4-6 10 V (NP) | |
| Conducted (signal) | EN61000-4-6 10 V (NP) | |
| Input transients | ETS 300 132-2, ETR 283 | |

GENERAL SPECIFICATIONS

| | | |
|---|---|------------------------------------|
| Efficiency | | See table |
| Overtemp. shutdown | | 120 °C |
| Isolation voltage | Input/output test voltage | 1500 Vdc |
| Switching frequency | Fixed | 400 kHz |
| Approvals and standards (See Notes 6,7,8) | | EN60950 UL1950 File No. E136005 |
| Material flammability | | UL94V-0 |
| Weight | | 26 g (0.92 oz) |
| MTBF (Representative model 48S05J @ 48 Vin) | MIL-HDBK-217F Parts stress method Ground Benign @ 25 °C | 3,485,000 hours |

ENVIRONMENTAL SPECIFICATIONS

| | | |
|---------------------|--|--|
| Thermal performance | Operating ambient temperature Non-operating | -40 °C to +60 °C, (See Note 9) -55 °C to +125 °C |
| ETS 300 019-2-3 | | Classes T3.1, 3.2, 3.3, 3.5 |
| Air temperature | Low: IEC 68-2-1 High: IEC 68-2-2 Change: IEC 68-2-14 | -40 °C +60 °C -40 °C to +60 °C |
| Relative humidity | IEC 68-2-56 IEC 68-2-30 | 10% to 100% RH Condensation |

CXA20 Series

Single and dual output

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

| INPUT VOLTAGE | OUTPUT VOLTAGE | OVERVOLTAGE PROTECTION (2,3) | OUTPUT CURRENT (MAX.) | TYPICAL EFFICIENCY | MODEL NUMBER (10,11) |
|---------------|----------------|------------------------------|-----------------------|--------------------|----------------------|
| 18-75 Vdc | 3.3 V | 3.7 V | 6 A | 80% | CXA20-48S3V3J |
| 18-75 Vdc | 5 V | 6.67 V | 4 A | 83% | CXA20-48S05J |
| 18-75 Vdc | 12 V | 14.25 V | 1.66 A | 83% | CXA20-48S12J |
| 18-75 Vdc | ±5 V | 6.67 V | 2 A ea. | 84% | CXA20-48D05J |
| 18-75 Vdc | ±12 V | 14.25 V | 0.83 A ea. | 84% | CXA20-48D12J |


Notes

- Negative output voltage deviation when either load is changed.
- For TVS/Zener specifications please see Application Note 107.
- On dual output models, OVP protection is on positive outputs only.
- With respect to minimum input voltage.
- With one external 4 µF capacitor across the input.
- Unit provides basic insulation up to the 75 Vdc maximum input voltage.
- Maximum continuous output power not to exceed 20 Watts.
- User must provide 2 A HRC (recommended) in line fuse in order to comply with safety approvals.
- Download Application Note 107 and the full data sheet from our website.
- The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

| PIN CONNECTIONS | | |
|-----------------|---------------|---------------|
| PIN NUMBER | SINGLE OUTPUT | DUAL OUTPUT |
| 1 | + Input | + Input |
| 2 | - Input | - Input |
| 3 | No Pin | No Pin |
| 4 | Remote On/Off | Remote On/Off |
| 5 | No Pin | + Output |
| 6 | + Output | Common |
| 7 | - Output | - Output |
| 8 | Trim | Trim |

MAX. TEMPERATURES FOR FULL RATED OUTPUT CURRENT


| MODEL | FULL Vin RANGE | Vin <60 Vdc |
|---------|----------------|-------------|
| 48S3V3J | 50 °C | 50 °C |
| 48S05J | 55 °C | 60 °C |
| 48S12J | 50 °C | 55 °C |
| 48D05J | 55 °C | 60 °C |
| 48D12J | 50 °C | 60 °C |

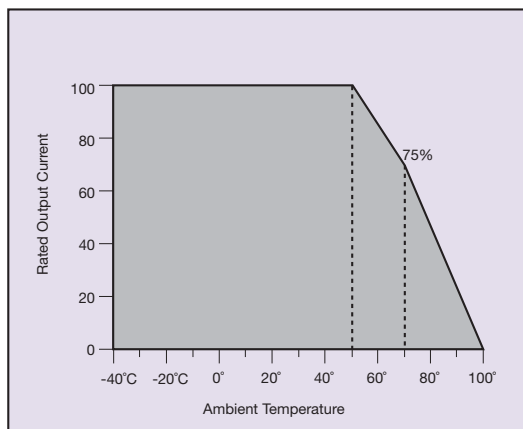

Derating Curve Output Current vs Temperature S3V3J
Natural Convection (<0.1 m/s airflow)

EXTERNAL OUTPUT TRIMMING

All models can be externally trimmed by ±10% using either method shown below. See Application Note 107 for details.



CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.

International Safety Standard Approvals




UL/cUL CAN/CSA 22.2 No. 60950-00 : UL 60950
File No. E174104
VDE Certificate No.112836. File No. 10401-3336-0154
CB Report and Certificate to IEC60950, Licence No. 121914

CXA20 Series

Single and dual output

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

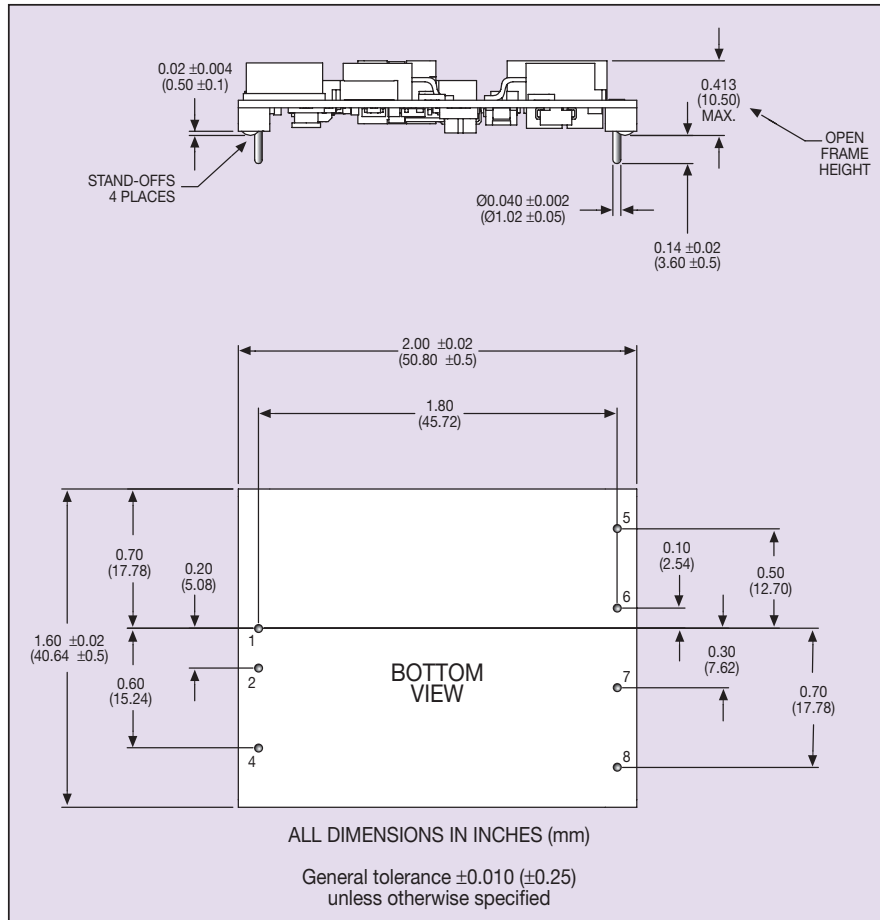

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)