

LCT43-E Series

47 Watts

Total Power: 47 Watts
Input Voltage: 85 - 264 VAC
120 - 300VDC
of Outputs: Triple



Special Features

- Totally enclosed
- Universal input
- Quick Installation
- Built-in EMI filter
- Low output ripple
- Overvoltage protection
- Overload protection

Electrical Specifications

Input

Input range	85 - 264 VAC (wide range) 120 - 300VDC
Frequency	47-63 Hz
Inrush current	<20A peak @ 115VAC, <40A peak @ 230VAC cold start @ 25°C
Input current	1A max. (RMS) @ 115VAC
Efficiency	70% typical at full load
EMI filter	FCC Class B conducted and radiated; CISPR 22 Class B conducted and radiated; EN55022 Class B conducted and radiated Bellcore GR-1089-core Class B conducted
Safety ground leadage current	<3.5 mA @ 50/60 Hz, 264 VAC input

Output

Maximum power	47W with 12CFM forced air
Cross regulation	±2% on output 1; ±5% on outputs 2, 3
Hold-up time	10ms @ 47W load, 100VAC input
Overload protection	Short circuit protection on all outputs. Case overload protected @ 110-135% above peak rating
Overvoltage protection	5.50-6.75 VDC on main output

Safety

VDE	0805/EN60950 21310-3336-0003
UL	UL60950 E186249
CSA	CSA 22.2-234 -950-95-M90
CB	Certificate and report 6593
CE	Mark (LVD)



Environmental Specifications

Operating temperature:	0° to 50°C ambient derate each output as 2.5% per degree from 50° to 70°C
Storage temperature:	-40°C to +85°C
Temperature coefficient:	±.04% per °C
Electromagnetic susceptibility:	designed to meet IEC1000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity:	Operating; non-condensing 5% to 90%
Vibration:	.41G from 3 to 500Hz; Spectral break points of .0065 G ² /Hz at 10 Hz and 200 Hz and 5 db/octave roll off at each end, 2 hours per axis
MTBF demonstrated	>300,000 hours at full load and 25°C ambient conditions

Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Maximum Load with 12CFM Forced Air	Peak Load ¹	Regulation ²	Ripple P/P (PARD) ³
LCT43-E	+5V	1.0A	4A	7A	8A	+4/-2%	50mV
	+12V	0.1A	1A	1.2A	1.5A	±5%	120mV
	-12V	0A	0.5A	0.5A	0.6A	±5%	120mV

1. Peak current lasting <30 seconds with a maximum 10% duty cycle.
2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 μF (tantalum capacitor) in parallel with a 0.1 μF capacitor at rated line voltage and load ranges.

Mechanical Drawing

Mating Connectors

AC Input: IEC 320
DC Outputs: Molex 15-48-0406 (USA)


Notes:

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is $\pm 0.02"$ ($\pm 0.5\text{mm}$)
3. Specifications are for convection rating at factory settings at 115VAC input 25°C unless otherwise stated
4. Warranty: 1 year
5. Weight: 1.25lbs/0.57kg

Pin Assignments

Connector LCT43-E

SK1-1	AC Line
SK1-2	Ground
SK1-3	AC Neutral
SK2-1	-12V
SK2-2	Com
SK2-3	+5V
SK2-4	+5V
SK2-5	Common
SK2-6	+12V

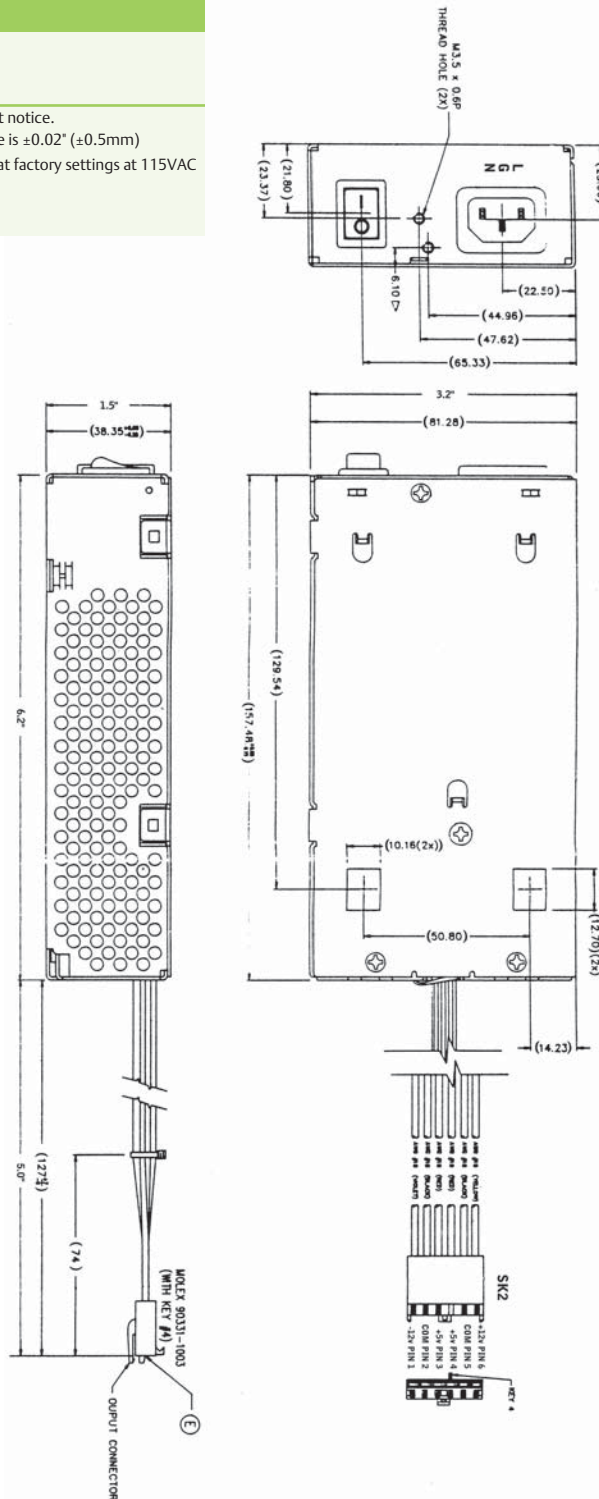

Astec Power

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698
Technical Support: +1 888 41 ASTEC
or +1 407 241 2752

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21
Tower 1, Metroplaza
223, Hing Fong Road
Kwai Fong, New Territories
Hong Kong
Telephone: +852 2437 9662
Facsimile: +852 2402 4426

For global contact, visit:

www.astecpower.com
technicalsupport@astec.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2006 Emerson Electric Co.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#)
[WRB01X-U](#) [LPX140-C](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-OUTA1-48](#)
[LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#) [TVQF-1219-](#)
[18S](#) [6504-226-2101](#) [CQM1IPS01](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-0065G](#) [CME240P-24](#)
[VI-RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#) [LFP300F-24-SNTY](#)