

## LDS25 Series

LED Lighting Power Supply

### Data Sheet

**Total Power:** 25 Watts  
**Current:** 300 to 700 mA  
**# of Outputs:** Single

### SPECIAL FEATURES

- Constant Current & Constant Voltage operation
- 0 - 10 V Dimming
- Free-Air rated - No forced air necessary for cooling
- Hot-wiring protection
- 350 Vac for 2 hours

### COMPLIANCE

- IP20 and Open-Frame
- CISPR 15 / FCC Part 15 EMI Performance
- Class C Harmonics
- > 0.9 Power Factor

### SAFETY

- EN 61347-2-13
- UL 60950 / 8750
- CSA C22.2 No. 107.1
- CE Mark (LVD)



### Electrical Specifications


Input	
Input range:	120-277 Vac
Input frequency:	47 - 63 Hz
Inrush current:	< 30 A max., cold start @ 25 °C
Leakage current:	250 µA, at 264 Vac 50/60 Hz
Input power (short-circuit):	5 W
Input current (max):	< 0.35 A, at full load
Input fusing:	Internally fused
EMI/RFI:	CISPR 15 FCC Part 15
Efficiency (typical):	86% - 230 Vac 86% - 120 Vac
Output	
Constant current:	From 36 V to 26 V
Constant voltage:	From 300 mA to 700 mA or Programmed Value, whichever is less
Output power:	25 W maximum
Ripple current:	15% peak; 30% peak-to-peak
Control and Protection	
Current limit:	Programmable. Refer to model table for details
Protection:	Short Circuit Overvoltage Overtemperature Hot wiring protection

### Environmental Specifications


Criteria	Specification	Reference
Power Factor	> 0.9	Energy Star
Harmonics	Class C	IEC 61000-3-2
THD - Input Current	< 20%	ANSI C82.11
Surge Immunity	Level 3	IEC 61000-4-5
EMC Compliance		IEC 61000-4-2, -3, -4, -5, -6, -8, -11
Temperature (case)	-30 °C to +90 °C	Operating
Ingress Protection	IP20 and Open-Frame	Refer to model table for details

### Mechanical Drawing




#### LDS25-36-H03F

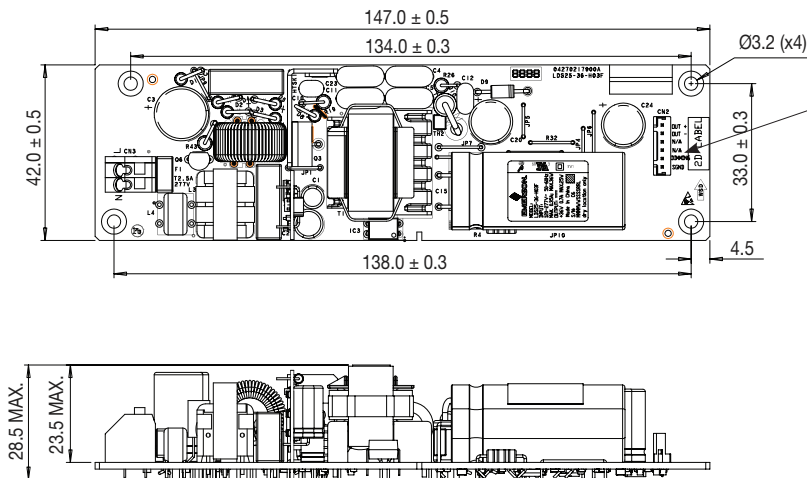

**CN2 Mate Connector**  
 Vendor Name: LANDWIN  
 House: 2020S0600  
 Contact: 2023T011V

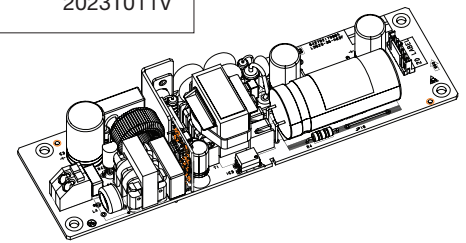

#### LDS25-36-H03U

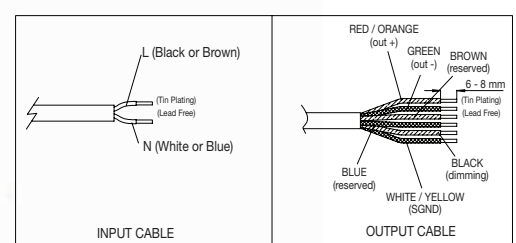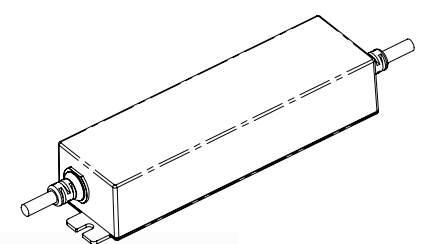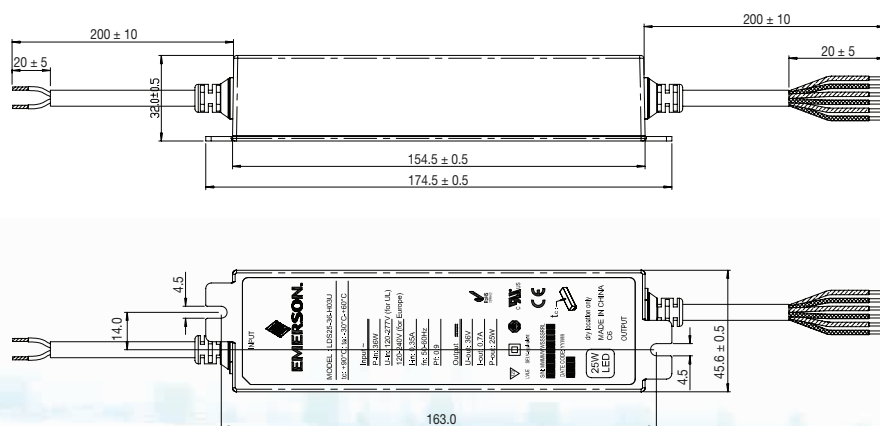

### Ordering Information

Model Number	Rated Output Voltage	Rated Output Current	Dimming Interface	IP Rating
LDS25-36-H03U	36 Vdc	700 mA dc	0 - 10 V	IP20
LDS25-36-H03F	36 Vdc	700 mA dc	0 - 10 V	Open-frame

### Input Connections: 2-Wire

		LDS25-36-H03F	LDS25-36-H03U	
Function	Name	Pin#	Wire Color	Wire Gauge
AC input Line	L	CN1-Black	Black or Brown	18AWG
AC input Neutral	N	CN1-Red	White or Blue	18AWG

### Output Connections: 6-Wire


		LDS25-36-H03F	LDS25-36-H03U	
Function	Name	Pin#	Wire Color	Wire Gauge
DC Output - Positive	OUT+	CN2-1	Red or Orange	22AWG
DC Output - Return	OUT-	CN2-2	Green	22AWG
Reserved		CN2-3	Brown	
Reserved		CN2-4	Blue	
Dimming	DIMMING	CN2-5	Black	22AWG
Signal Ground	SGND	CN2-6	White or Yellow	22AWG

### Current Adjust and Dimming Description

#### 0 - 10 V Interface

Control Voltage between “Dimming” and “SGND”

Dimming Resistor between “Dimming” and “SGND”

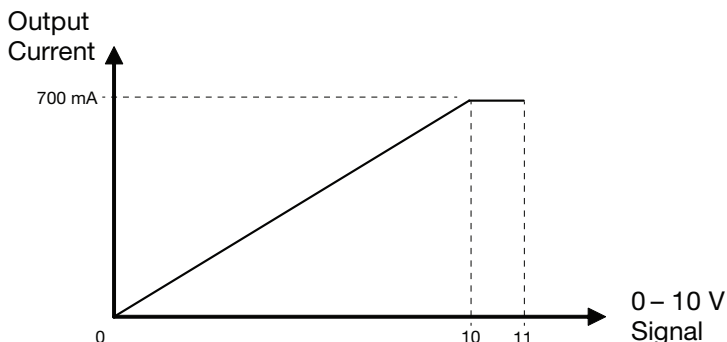

Programmed Current	Resistor Value
300 mA	16.9 kOhm
350 mA	22.6 kOhm
500 mA	52.3 kOhm
525 mA	61.9 kOhm
700 mA	511 kOhm

### WORLDWIDE OFFICES

#### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

#### Europe (UK)

Ground Floor Offices, Barbary House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [Artesyn Embedded Technologies](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)  
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)  
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)  
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)  
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)  
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)  
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)  
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)  
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)