

LDS70 Series

LED Lighting Power Supply - Class 2

Data Sheet

Total Power: 70 Watts
of Outputs: Single

SPECIAL FEATURES

- Constant current & constant voltage operation
- Dimming options
- Free-air rated - No forced air necessary for cooling

COMPLIANCE

- Class 2 outputs
- IP64 to IP67 water protection
- CISPR 15 / FCC Part 15 EMI performance
- Class C harmonics
- < 1.0 W no-load power
- > 0.9 power factor

SAFETY

- EN 61347-2-13
- UL 1310 / 8750
- CSA C22.2 No. 107.1
- CE Mark (LVD)

WARRANTY

Standard 5-year warranty




Electrical Specifications

Input	
Input range nom	100 - 240 Vac (U models); 120-277 Vac (H models)
Input range (max)	90-264 Vac (U models); 90-305 Vac (H models); Derating may apply
Input frequency	47 - 63 Hz
Inrush current	< 50 A max., cold start @ 25 °C
Leakage current	750 µA, at 264 Vac 50/60 Hz
Input power (no-load)	< 1.0 W, at no load
Input power (max)	< 82 W, at full load
Input fusing	Internally fused
EMI/RFI	CISPR 15 FCC Part 15
Efficiency (typical)	88% - 230 Vac 87% - 115 Vac
Output	
Constant current	Programmable current levels. Refer to model table for details
Constant voltage	No load to Full load operation. Refer to model table for details
Output power	70 W maximum (60 W for 12 V). Class 2 rated outputs
Ripple voltage	< 2%
Control and Protection	
Current limit	Programmable. Refer to model table for details
Protection	Short circuit Overvoltage Overtemperature

Environmental Specifications

Criteria	Specification	Reference
Power factor	> 0.9	Energy Star
Harmonics	Class C	IEC 61000-3-2
THD - input current	< 20%	ANSI C82.11
Surge immunity	Level 3 6 kV ring wave	IEC 61000-4-5 ANSI C62.41
EMC compliance		IEC 61000-4-2, -3, -4, -5, -6, -8, -11
Temperature (case)	-40 °C to 90 °C	Operating
Ingress protection	IP64 through IP67	Refer to model table for details

Mechanical Drawing

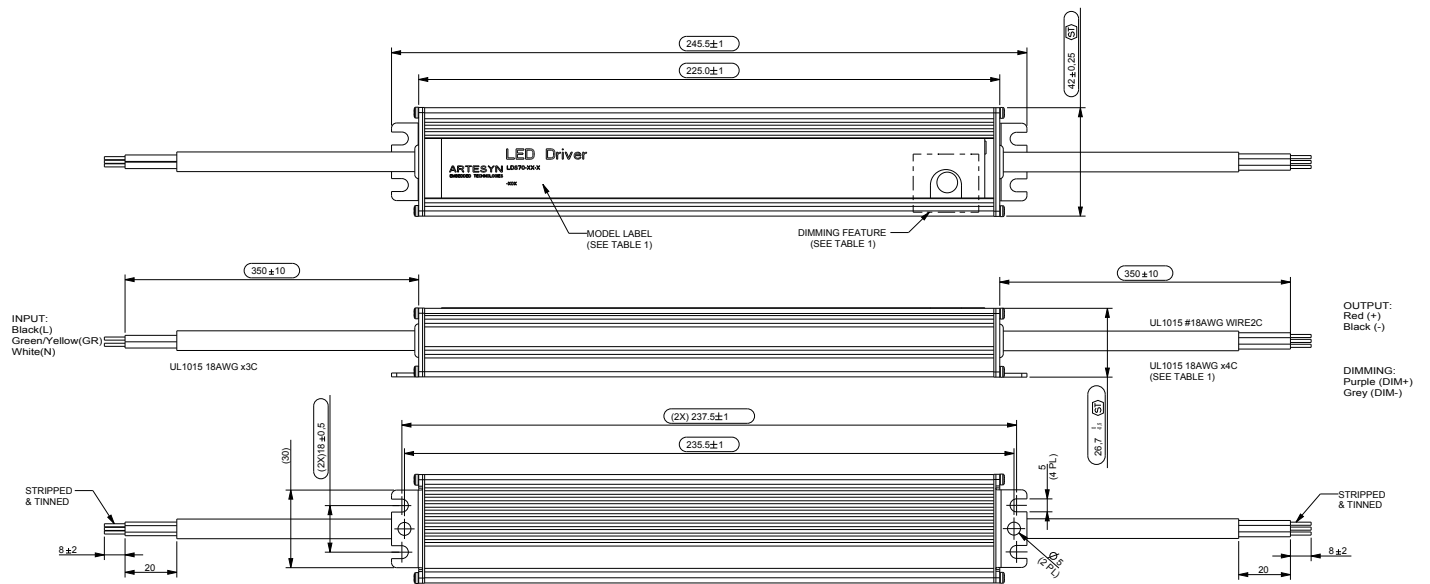

Mechanical Miscellaneous

Criteria	Specification	Reference
Input wiring	300 mm	3-wire
Output wiring	300 mm	4-wire
Weight	575 grams	

Ordering Information

Model Number	Rated Output Voltage	Rated Output Current	Current Adjust	Dimming Interface	IP Rating
LDS70-12-U00	12 Vdc	5.0 Adc		None	IP67
LDS70-12-H03	12 Vdc	5.0 Adc		1 - 10 V	IP67
LDS70-58-U00	58 Vdc	1.2 Adc		None	IP67
LDS70-58-U01	58 Vdc	1.2 Adc	DIP Switch	2-level	IP67
LDS70-58-H03	58 Vdc	1.2 Adc		1 - 10 V	IP67
LDS70-58-H04	58 Vdc	1.2 Adc		Programmable ¹	IP67

Notes:

1. The Dimming Interface on these highly-flexible models can be programmed via a Graphical User-Interface. The options include 0-10 V, 1-10 V and Bi-Level dimming. Maximum and minimum current levels and threshold levels are also programmable.

Current Adjust and Dimming Description


DIP Switch (for model -U01 only)

Switch 1	Switch 2	-12 Model	-58 Model
ON	ON	5.00 Adc	1.2 Adc
OFF	ON	3.75 Adc	0.9 Adc
ON	OFF	2.50 Adc	0.6 Adc
OFF	OFF	1.25 Adc	0.3 Adc

2 Level - External Switch between Purple & Grey Wires (for model -U01 only)

Switch	Open Current
CLOSED	At Programmed Level
OPEN	At 20% of Rated Level

0 - 10 V Between Purple & Grey Wires (for models -H03 only)

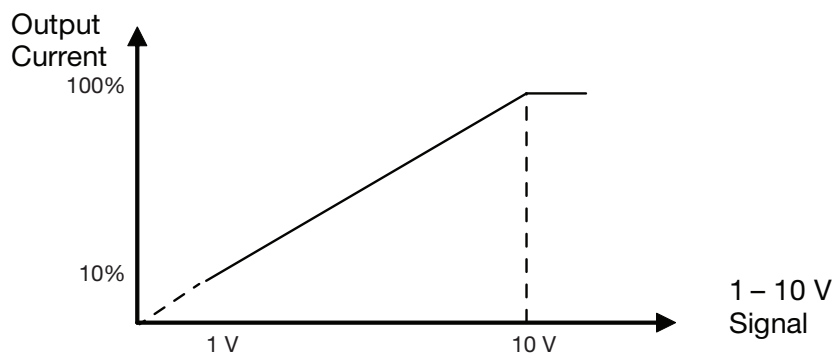

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYNTM
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#) [LCA 75W 900-1800MA ONE4ALL LP PRE](#)