

MVME8100 Series

High Performance Power VME64x/VXS board

■ Embedded Computing for
Business-Critical Continuity™

Key Features


- Freescale QorIQ P5020 1.8/2.0GHz
- Up to 8GB DDR3-1333MHz ECC Memory
- NAND Flash and MRAM for non-volatile storage
- 2 PMC/XMC sites
- Optional 2.5" SATA SSD
- PCIe or SRIO fabric connectivity
- Extended Temperature, Conduction Cooled variant

The MVME8100 is a high performance 6U VME/VXS board featuring the new Freescale P5020 QorIQ processor supporting high speed DDR3-1333MHz with ECC. It offers expanded IO and memory features with PCIe and SRIO fabric connectivity and multiple USB, Serial and Ethernet ports. Memory includes up to 8GB DDR3, 512kB MRAM non volatile memory, and 8GB eMMC NAND Flash.

The MVME8100 is offered in commercial and a fully rugged variants for extreme environments with extended shock, vibration, temperatures and conduction cooling. It is suitable for a range of high end industrial control applications such as SPE and photo lithography and C4ISR, including Radar/Sonar. It will provide technology insertion to prolong current programs while providing more computing performance and data throughput.

The MVME8100 supports a full range of BSPs including Linux, Wind River VxWorks, and Green Hills Integrity.

Preliminary

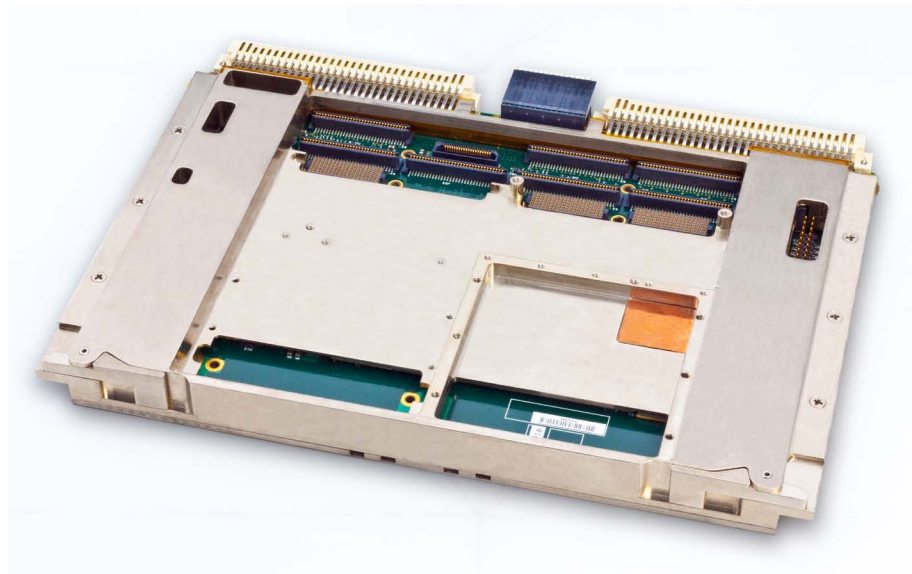


EMERSON™
Network Power

Hardware Specifications

PROCESSOR

- Freescale QorIQ P5020
- 1.8GHz: 27W ENP4 variant
- 2.0GHz: 28W ENP variants

MEMORY

- Up to 8GB of 64 bit DDR3-1333 ECC SDRAM soldered down
- 16 MB SPI ROM for boot code (in 1+1 redundant banks/devices)
- 512kB MRAM for data storage
- 8GB NAND Flash with SD/MMC interface

MANAGEMENT

- Boot bank/device selection
- Control of module reset and back-end power

BACKPLANE I/O

- P0
 - ▲ Two USB 2.0
 - ▲ Two SERDES GigE (VITA 41.6) (dedicated)
 - ▲ Up to two SRIO x4 links (VITA 41.2)
 - ▲ Up to two PCIe x4 links (VITA 41.4); root or end-point
 - ▲ One SATA
 - ▲ Four GPIO
- P1
 - ▲ VME64x & 2eSST
- P2
 - ▲ VME64x & 2eSST
 - ▲ Four RS232/422/485
 - ▲ Two 10/100/1000BaseT Ethernet

OTHER FEATURES

- Real Time Clock with battery backup
- Real time counters
- Watchdog

EXPANSION MODULE

- Site 1 supports PMC or XMC (PCI-X/PCIe x8)
- Site 2 supports PMC or XMC (PCI-X/PCIe x4) or alternatively supports a 2.5" SATA HDD or SSD

FRONT PANEL CONNECTIVITY

- Two GigE (RJ45)
- One RS232/422/485 console (Micro-DB9)
- One USB 2.0 (Type A)

REAR TRANSITION MODULE

- VXS1-RTM1
 - ▲ Two USB 2.0 ports (Type A)
 - ▲ Two RS232/422/485 ports (Micro-DB9)
 - One port is switchable between a console and standard COM port
 - ▲ Two RS232/422/485 ports (internal headers)
 - ▲ Two 10/100/1000BASE-T Ethernet ports (RJ45)
 - ▲ One PMC Interface Module (PIM) site
 - ▲ 4 GPIO to (internal header)
 - ▲ Reset switch
 - ▲ One eSATA port
- MVME7216E RTM
 - ▲ Provides four serial ports and two Ethernet ports when used with MVME8100

Software and Firmware Specifications

BOOT

- UBoot binary and source code.

BOARD SUPPORT PACKAGES

- Wind River VxWorks
- Linux
- Green Hills Integrity
- Hypervisor

Compliance and Certification Information

Environmental Compliance Standards
ENP1 and ENP4 available upon release

ENVIRONMENTAL

Ruggedization Level3	ENP1	ENP2	ENP3	ENP4
Cooling Method:	Forced Air	Forced Air	Conduction	Conduction
Operating Temperature:	0 °C to +55 °C	-40 °C to +71 °C	-40 °C to +71 °C	-40 °C to +85 °C
Storage Temperature:	-40 °C to +85 °C	-50 °C to +100 °C	-50 °C to +100 °C	-50 °C to +125 °C
Vibration Sine: (10min/axis)	1G, 5 - 200 Hz	5G, 15 to 2000Hz	10G, 15 to 2000Hz	10G, 15 to 2000Hz
Vibration Random: (1hr/axis)	.01g ² /Hz, 15 to 2000Hz	.04g ² /Hz, 15 to 2000Hz (8GRMS) ¹	0.1g ² /Hz, 15 to 2000Hz (12GRMS) ²	0.1g ² /Hz, 15 to 2000Hz (12GRMS) ²
Shock:	20g/11mS	30g/11mS	40g/11mS	40g/11mS
Humidity:	to 95% RH	to 100% RH	to 100% RH	to 100% RH
Conformal Coating:	No	Option (Acrylic)	Option (Acrylic)	Option (Acrylic)

Note 1: Flat 15-1000Hz, -6db/octave 1000Hz – 2000Hz [MIL-STD 810F Figure 514.5C-17]

Note 2: +3db/octave 15-300Hz, Flat .1g² 300-1000Hz, -6db/octave 1000Hz – 2000Hz [MIL-STD 810F Figure 514.5C-8]

Note 3: Component and/or assembly screening shall be employed to satisfy feature/functional req (where feasible) when components are not available that meet Ruggedization level req's.

EMC COMPLIANCE STANDARDS

- Industry standard requirements: (FCC, VCCI, MIC, AS/NZ)

SAFETY STANDARDS

- Industry standard requirements (UL, CSA, Ctick)

VITA STANDARDS

- VME64x
- VITA 1.5 2eSST
- VITA 39 XMC
- VITA 41.0, 41.2, 41.4, 41.6 VXS













Code Name	Description
MVME8100-202200401S	P5020 2.0GHz, 4GB DDR3, 2PMC/XMC SCANBE ENP1
MVME8100-202200401E	P5020 2.0GHz, 4GB DDR3, 2PMC/XMC IEEE ENP1
MVME8100-202180404	P5020 1.80GHz, 4GB DDR3, 2PMC/XMC ENP4
VXS1-RTM1	RTM for MVME8100 and IVME7300
VME-64GBSSDKIT	SSD and mounting kit
VME-HDMNTKIT	Hard disk Mounting Kit
*Please contact your sales representative for additional processor and memory variants.	

SOLUTION SERVICES

Emerson Network Power provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh.

PowerPC is a trademark of IBM Corp. and used under license. FlashFX is a trademark of Datalight, Inc. All other product or service names are the property of their respective owners.

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Emerson Network Power may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Emerson Network Power reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Emerson Network Power does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Emerson Network Power's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

Emerson Network Power. The global leader in enabling <i>Business-Critical Continuity™</i> .	 AC Power	 Embedded Power	 Precision Cooling
	 Connectivity	 Infrastructure Management & Monitoring	 Racks & Integrated Cabinets
	 DC Power	 Outside Plant	 Services
	 Embedded Computing	 Power Switching & Controls	 Surge Protection

Emerson Network Power

Offices: Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720
Paris, France +33 1 60 92 31 20 • Munich, Germany +44 1509 236490 • Tel Aviv, Israel +972 9 9560361
Hong Kong +852 2176 3540 • Shanghai, China +86 21 3395 0289 • Tokyo, Japan +81 3 5403 2730 • Seoul, Korea +82 2 3483 1500

EmersonNetworkPower.com/EmbeddedComputing

Emerson and the Emerson Network Power logo are trademarks of Emerson Electric Co. ©2012 Emerson Electric Co. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for CPU - Central Processing Units category:

Click to view products by Artesyn Embedded Technologies manufacturer:

Other Similar products are found below :

[AT80612003090AAS LBWJ](#) [B4860NSE7QUMD](#) [NPIXP2855AB-S-LA88](#) [IVPX7225-RTM-1](#) [96MPI5-2.9-6M10T](#) [2SC4646D-AN](#)
[SMBV1061LT1G](#) [2SC4646E-AN](#) [2SJ268-DL-E](#) [CP80617003981AHS LBTQ](#) [MATXM-CORE-411-HTSNK](#) [TEC0193BPF](#) [TND516SS-TL-E](#)
[BGSF 1717MN26 E6327](#) [D8086-2](#) [LF80538GF0282M-S-L8VY](#) [CM8063401293902S R1A4](#) [CM8063501521302S R1B8](#)
[CM8066201919901 SR2L0](#) [CM8066201928505 SR2HT](#) [CPH5855-TL-E](#) [CM8063501293200S R1A0](#) [AV8063801129600S R10F](#) [EMS36-02-](#)
[2H-MDT](#) [EMM04-MDT](#) [NG80386DX33](#) [NHIXP432AC](#) [NK80530MZ866256S-L7XH](#) [P1021NXE2HFB](#) [R0K5ML001SS00BR](#)
[LC87F2608A](#) [LC87FBK08A](#) [PRIXP425BC](#) [PRIXP423BB](#) [CM8066201921712S R2LF](#) [CM8064601467102S R152](#) [CM8063501375800S](#)
[R1AX](#) [CM8063501293506S R1A2](#) [CM8063401293802S R1A3](#) [CM8062107185405S R0KM](#) [LC87F0G08A](#) [CM8067702867061S R374](#) [PB-](#)
[8SMB](#) [COMX-300-HSP](#) [RTM-ATCA-7360](#) [96MPI7-3.4-8M11T](#) [CM8066002023801S R2J1](#) [96MPP-2.3-3M10T](#) [96MPI7-3.4-8M11T1](#)
[96MPXE-2.0-15M20T](#)