



RoHS compliant

H	Sheet 1/2	Replace	WSW components		Name	Date	Modification	Id:				Angle ±3°																	
			ASSMANN	Alex	25.01.2006	Drawn							①																
	rev06	ASS 2320 CO	Drawing-No.		Dean	02.07.2009	Update	②																					
	G	ADIP xx Z-LC	ASSMANN WSW-No.	Winnie	Approved	15.06.2018	Dean	21.01.2010	Add sheet 2	④	±0.25	X XX	±0.15	X XXX															
															Customer-No.	Alex	25.01.2006	Ray	Drawn	16.07.2015	Add recommended PCB layout	⑤	±0.40	X X					
																									Xavier	15.06.2018	Update	⑥	1:1




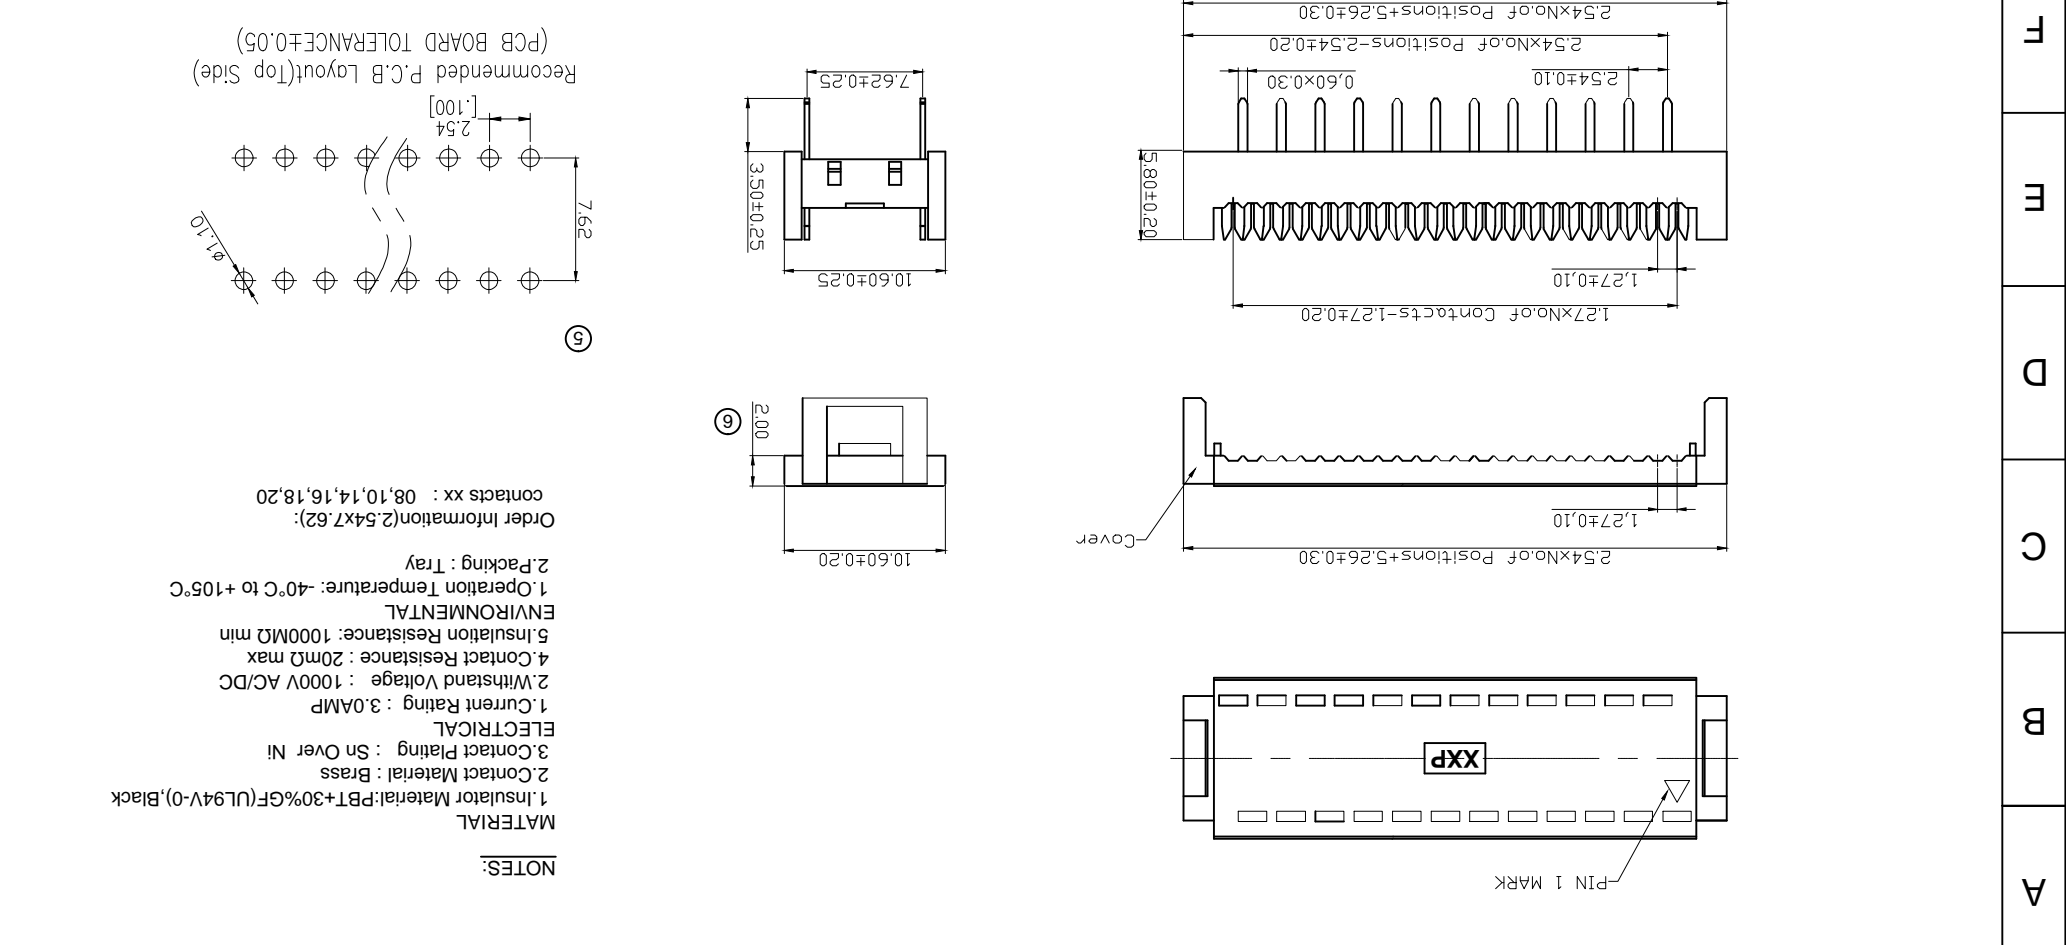


RoHS compliant

H	Sheet 2/2	Replace		Name	Date	Modification	Id:	X.X°	±1°	SCALE 1:1 TOLERANCE X.X° ±0.38 X.X° ±0.25 X.XX° ±0.13 Angle ±3° ±1°					
				Alex	25.01.2006	Drawn		①	Drawn						
	Drawing-No. ASS 2320 CO	rev06		Customer-No. ASSMANN WSW-No.	Date	Name	Date	Modification	Id:		X.X°				
											Dean	02.07.2009	Update	②	Update
	G	ADIP xx Z-LC		ASSMANN WSW-No.	Winnie	15.06.2018	Approved	Dean	28.12.2009		Modify drawing	③	③	X.XX	±0.13
					Alex	25.01.2006	Drawn	Ray	16.07.2015		Add recommended PCB layout	⑤	⑤	X.X	±0.25
														X.X°	±0.38
	Update	⑥	⑥	X.XX	±0.13										
	Update	⑥	⑥	X.X	±0.25										
	Update	⑥	⑥	X.X	±0.25										
	Update	⑥	⑥	X.XX	±0.13										

Dimensions (Pitch=15.24mm)

Positions	A	B	C	D
24	27.94	35.74	15.24	18.22
28	33.02	40.82	15.24	18.22
40	48.26	56.06	15.24	18.22

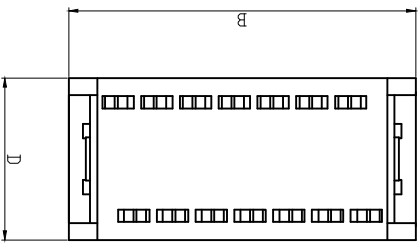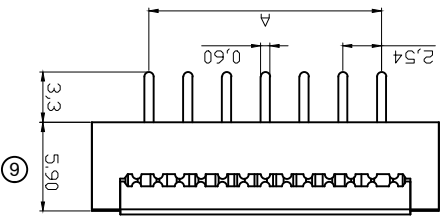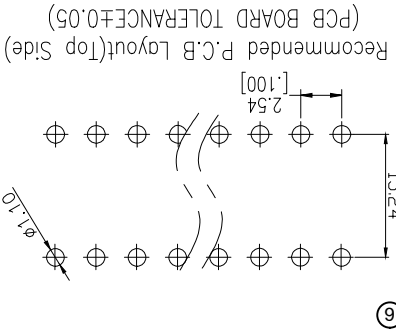

NOTES:

MATERIAL
 1. Insulator Material: PBT+30%GF(UL94V-0),Black
 2. Contact Material: Brass
 3. Contact Plating: Sn Over Ni

ELECTRICAL
 1. Current Rating : 1.0AMP
 2. Withstand Voltage : 500V AC/DC
 4. Contact Resistance : 30mΩ max at 1 AMP DC.
 5. Insulation Resistance: 1000MΩ at 500 VDC

ENVIRONMENTAL
 1. Packing : Tray

Order information(2.54x15.24):
 contacts xx : 24,28,40

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [assmann](#) manufacturer:

Other Similar products are found below :

[AU-Y1007-R](#) [A-DF15-HOOD-WP](#) [A-USB-1](#) [AK-320200-100-S](#) [AK-340603-000-S](#) [AK500-RA-6-0.5-R](#) [AK669/2-18-BLACK-R](#) [AT-K-26-10-B/1000](#) [AU-Y1008-2-R](#) [AWG28-50/G/300](#) [AWH26G-0232](#) [AB-900](#) [AB-970](#) [AB-984](#) [A-DS 15PP](#) [AK3730X-R](#) [AK579/F-2](#) [A-MCU60010/Y](#) [A-PC2302-030028-1](#) [AT-S-26-8/8/W-7/R](#) [AWH-24G-E202-IDC](#) [DK-2631-05](#) [DN-91624U](#) [DN-91548U](#) [DK-1511-015/WH](#) [A-MCU60030/R](#) [AWH50G-0202-T-R](#) [AK500/16-OE-7-0.5](#) [AK500/14-OE-5-2](#) [DK-1611-020/B](#) [DK-1511-100/G](#) [AK-320400-002-S](#) [AT-K-26-6-B/500](#) [AK-400102-008-R](#) [AT-K-26-6-W/100](#) [AWP 10-7540-T](#) [AK-330118-100-S](#) [AK-330118-300-S](#) [AK-340102-010-W](#) [AK500/U-1-R](#) [AK-SATA-030DL-R](#) [AWG28-16/G/300](#) [AWG28-9/F/300](#) [ADIP16-G-LC-R](#) [AK-310203-018-E](#) [AK-330105-300-S](#) [AK-340406-001-W](#) [A-MCSSP60020/B-R](#) [A-MO-8/8-F50-R](#) [AWG28-9/G/300](#)