
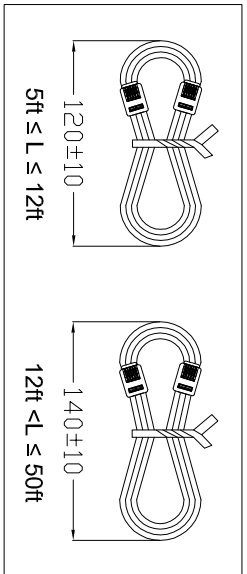


Conductor: {26AWG(0.16x7)BC}x6C
 Insulation:(PP6331 TD:0.95±0.03)x6C
 Jacket: PVC NOUL 65P

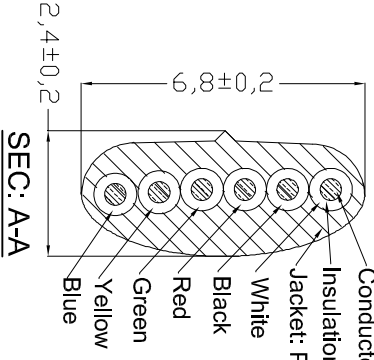

P1	P2
1 White	1
2 Black	2
3 Red	3
4 Green	4
5 Yellow	5
6 Blue	6

Note for plug:
 Material:
 Housing-Polycarbonate,clear.
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area,Gold flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate

Order code: AT-S-26-6/6-X-XX/R

Order color:
 B: Black
 W: White
 S: Silver

Length Code	Length (mm)
5	1525±20(5FT)
7	2135±30(7FT)
10	3050±60(10FT)
12	3660±60(12FT)
14	4270±60(14FT)
25	7625±100(25FT)
50	15250±150(50FT)

RoHS compliant
 Unit: mm

Scale	Free	Date		Name	
TOLERANCE		Drawn	18.12.2017	Amy	
.X	±0.50	Approved	18.12.2017	Amy	
.XX	±0.20				
DIM	TOL				
Angle	±2°				



Customer-No.	ASSMANN WSW-No.	Drawing-No.	Replace
	AT-S-26-6/6-X-XX/R	ASS 8169 CA	rev00

1	2	3	4	5	6	7
1	2	3	4	5	6	7
H	G	F	E	D	C	B
H	G	F	E	D	C	B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [assmann](#) manufacturer:

Other Similar products are found below :

[AU-Y1007-R](#) [AK-320200-100-S](#) [AK-330114-050-S](#) [AK-340100-020-S](#) [AK-340305-010-W](#) [AK-340305-030-W](#) [AK-340603-000-S](#) [AK500-RA-6-0.5-R](#) [AK669/2-18-BLACK-R](#) [AT-K-26-10-B/1000](#) [AU-Y1008-2-R](#) [AWG28-50/G/300](#) [AWH26G-0232](#) [AB-900](#) [AB-970](#) [AB-984](#) [A-DS 15PP](#) [AK-320200-030-S](#) [AK-340100-030-S](#) [AK-340301-020-S](#) [AK-340301-030-S](#) [AK-340305-020-W](#) [AK-340602-000-S](#) [AK3730X-R](#) [AK579/F-2](#) [A-MCU60010/Y](#) [A-PC2302-030028-1](#) [A-LED8-1WAAS-MR7-1](#) [AT-S-26-8/8/W-7/R](#) [DN-91524U](#) [DK-2631-05](#) [DN-91624U](#) [DN-91548U](#) [DK-1511-015/WH](#) [A-MCU60030/R](#) [AWH50G-0202-T-R](#) [AK500/16-OE-7-0.5](#) [DK-1611-020/B](#) [DK-1511-100/G](#) [AK-300136-018-S](#) [AT-K-26-10-W/1000](#) [AWG28-15/G/300](#) [ATUP-P305T](#) [AWP 10-7540-T](#) [AK-330118-100-S](#) [AK-330118-300-S](#) [AK500/U-1-R](#) [AK-SATA-030DL-R](#) [AWG28-16/G/300](#) [AWG28-9/F/300](#)