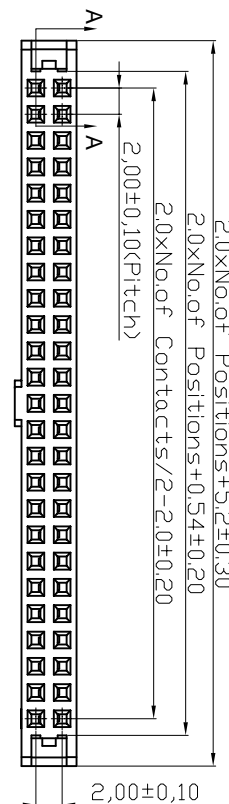
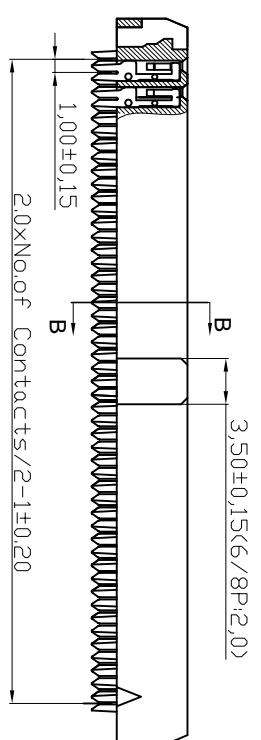

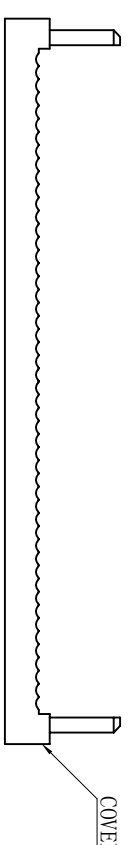



	1	2	3	4	5	6	7																																																																
A	<p>2.0xNo.of Positions+5.2±0.30 2.0xNo.of Positions+0.54±0.20 2.0xNo.of Contacts/2-2.0±0.20 2.00±0.10(Pitch)</p>  <p>2.00±0.10</p>																																																																						
B	 <p>SECTION A-A</p> <p>3.50±0.15(6/8P:2.0)</p> <p>2.0xNo.of Contacts/2-1±0.20</p> <p>1.00±0.15</p>																																																																						
C	 <p>SECTION B-B</p> <p>1.90±0.20 5.40±0.15 4.70±0.20 4.20±0.20</p> <p>⑦ Wire Spec: AWG28</p> <p>No. of contacts: 06, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26 30, 34, 36, 40, 44, 50, 60, 64, 68</p>																																																																						
D	 <p>SECTION A-A</p> <p>COVER</p> <p>2.60±0.20 8.78±0.20 3.42 4.20</p>																																																																						
E																																																																							
F																																																																							
G	<p>ROHS compliant</p>  <p>File No.: E198287 ⑥</p>																																																																						
H	<table border="1"> <thead> <tr> <th>Scale</th> <th>1:1</th> <th>⑦</th> <th>Add wire spec</th> <th>27.09.2016</th> <th>Jesse</th> <th></th> <th>Date</th> <th>Name</th> </tr> </thead> <tbody> <tr> <td>TOLERANCE</td> <td></td> <td>⑥</td> <td>Add the UL-File No</td> <td>13.12.2013</td> <td>Wrinle</td> <td>Drawn</td> <td>25.01.2006</td> <td>Alex</td> </tr> <tr> <td>X.X</td> <td>±0.40</td> <td>⑤</td> <td>Delete page 2</td> <td>22.11.2013</td> <td>Ray</td> <td>Approved</td> <td>27.09.2016</td> <td>Jesse</td> </tr> <tr> <td>X.XX</td> <td>±0.25</td> <td>④</td> <td>Added 68 Pin</td> <td>24.12.2009</td> <td>Dean</td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.XXX</td> <td>±0.15</td> <td>③</td> <td>Correct P/N</td> <td>28.10.2009</td> <td>Dean</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Angle</td> <td>±3°</td> <td>②</td> <td>Update</td> <td>29.06.2009</td> <td>Dean</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>①</td> <td>Modification</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>							Scale	1:1	⑦	Add wire spec	27.09.2016	Jesse		Date	Name	TOLERANCE		⑥	Add the UL-File No	13.12.2013	Wrinle	Drawn	25.01.2006	Alex	X.X	±0.40	⑤	Delete page 2	22.11.2013	Ray	Approved	27.09.2016	Jesse	X.XX	±0.25	④	Added 68 Pin	24.12.2009	Dean				X.XXX	±0.15	③	Correct P/N	28.10.2009	Dean				Angle	±3°	②	Update	29.06.2009	Dean						①	Modification						
Scale	1:1	⑦	Add wire spec	27.09.2016	Jesse		Date	Name																																																															
TOLERANCE		⑥	Add the UL-File No	13.12.2013	Wrinle	Drawn	25.01.2006	Alex																																																															
X.X	±0.40	⑤	Delete page 2	22.11.2013	Ray	Approved	27.09.2016	Jesse																																																															
X.XX	±0.25	④	Added 68 Pin	24.12.2009	Dean																																																																		
X.XXX	±0.15	③	Correct P/N	28.10.2009	Dean																																																																		
Angle	±3°	②	Update	29.06.2009	Dean																																																																		
		①	Modification																																																																				
	1	2	3	4	5	6	7	SV1751																																																															

NOTES:

MATERIAL

1. Insulator Material: PBT+30%GF(UL94V-0), Black
2. Contact Material : Phosphor Bronze
3. Contact Plating : Gold flash/ Tin Over Ni ELECTRICAL
1. Current Rating : 1AMP
2. Withstand Voltage : 500V AC/DC
3. Contact Resistance : 20mΩ max
4. Insulation Resistance: 1000MΩ min ENVIRONMENTAL
1. Operation Temperature: -40°C to +105°C
2. Packing: Tray

ASSMANN
WSW/ components

Customer-No.
ASSMANN WSW-No.
AWP2 xx-7240 ②

Drawing-No.
ASS 2309 CO rev07

Replace Sheet 1 / 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [assmann](#) manufacturer:

Other Similar products are found below :

[AU-Y1007-R](#) [AK-320200-100-S](#) [AK-340305-010-W](#) [AK-340603-000-S](#) [AK500-RA-6-0.5-R](#) [AK669/2-18-BLACK-R](#) [AT-K-26-10-B/1000](#)
[AU-Y1008-2-R](#) [AWG28-50/G/300](#) [AWH26G-0232](#) [AB-900](#) [AB-970](#) [AB-984](#) [A-DS 15PP](#) [AK-340301-030-S](#) [AK-340305-020-W](#)
[AK3730X-R](#) [AK579/F-2](#) [A-MCU60010/Y](#) [A-PC2302-030028-1](#) [AT-S-26-8/8/W-7/R](#) [DN-91524U](#) [DK-2631-05](#) [DN-91624U](#) [DN-91548U](#)
[DK-1511-015/WH](#) [A-MCU60030/R](#) [AWH50G-0202-T-R](#) [AK500/16-OE-7-0.5](#) [DK-1611-020/B](#) [DK-1511-100/G](#) [AT-K-26-10-W/1000](#)
[AWG28-15/G/300](#) [ATUP-P305T](#) [AWP 10-7540-T](#) [AK-330118-100-S](#) [AK-330118-300-S](#) [AK500/U-1-R](#) [AK-SATA-030DL-R](#) [AWG28-](#)
[16/G/300](#) [AWG28-9/F/300](#) [ADIP16-G-LC-R](#) [AK-330105-300-S](#) [AK-340406-001-W](#) [A-MCSSP60020/B-R](#) [A-MO-8/8-F50-R](#) [AWG28-](#)
[9/G/300](#) [V25HK](#) [A-LED8-1WAAS-MR7-1](#) [AWP2 16-7240](#)