1. Features

- Full Trusted Computing Group (TCG) Trusted
 Platform Module (TPM) Version 1.2 Compatibility
- Compliant with TCG PC Client Specific TPM Interface Specification Version 1.2
- Single-chip Turnkey Solution
- Hardware Asymmetric Crypto Engine
- 2048-bit RSA® Sign in 200ms
- AVR® RISC Microprocessor
- Internal EEPROM Storage for RSA Keys
- 33MHz LPC (Low Pin Count) Bus for Easy PC Interface
- Secure Hardware and Firmware Design and Chip Layout
- True Random Number Generator (RNG) FIPS 140-2 Compliant
- NV Storage space for 1280-bytes of user defined data
- 3.3V Supply Voltage
- 28-lead Thin TSSOP, Wide TSSOP or 40-lead QFN Packages
- Offered in both Commercial (0 to 70°C) and Industrial (-40 to +85°C)
 Temperature Ranges

2. Description

The Atmel® AT97SC3204 is a fully integrated security module designed to be integrated into personal computers and other embedded systems. It implements version 1.2 of the Trusted Computing Group (TCG) specification for Trusted Platform Modules (TPM).

The TPM includes a cryptographic accelerator capable of computing a 2048-bit RSA signature in 200ms and a 1024-bit RSA signature in 40ms. Performance of the SHA-1 accelerator is $20\mu s$ per 64-byte block.

The chip communicates with the PC through the LPC interface. The TPM supports SIRQ (for interrupts) and CLKRUN to permit clock stopping for power savings in mobile computers.



Trusted Platform Module

Atmel AT97SC3204 LPC Interface

Summary

* See the full data sheet for detailed design information



5294BS-TPM-9/10



Table 1-1. Pin Configurations

| Pin Name | Function |
|-----------------|--|
| V _{cc} | 3.3V Supply Voltage |
| SB3V | Standby 3.3V Supply Voltage |
| GND | Ground |
| LRESET# | PCI Reset Input Active Low |
| LAD0 | LPC Command, Address, Data Line Input/Output |
| LAD1 | LPC Command, Address, Data Line Input/Output |
| LAD2 | LPC Command, Address, Data Line Input/Output |
| LAD3 | LPC Command, Address, Data Line Input/Output |
| LCLK | 33MHz PCI Clock Input |
| LFRAME# | LPC FRAME Input |
| CLKRUN# | PCI Clock Run Input/Output |
| LPCPD# | LPC Power Down Input |
| SERIQ | Serialized Interrupt Request Input/Output |
| GPIO6 | General Purpose Input/Output |
| Testl | Test Input (disabled) |
| TestBl | Test Input (disabled) |
| ATest | Atmel Test Pin |
| NC | No Connect |
| NBO | Not Bounded out |

Figure 2-1. Pinout Diagrams

28-pin Thin TSSOP 4.4 mm x 9.7 mm Body 0.65 mm Pitch

28-pin TSSOP 6.1 mm x 9.7 mm Body 0.65 mm Pitch


| | | 6.0 | mm | | .0 r | | | y |
|-----|-----|------|-------|----|------|----|----|---|
| est | est | CPD# | ERIRQ | 30 | 90 | 30 | 90 | Ç |

| | | | | | | A | ٧ | Ξ | S | Z | Z | Z | Z | Z | Z | _ |
|----------|----|----|-----------------|----------|----|-----|---------------|--------------|--------------|-----|----------|--------------|-----|---------|-----------------|-----------------|
| ATest | 1 | 28 | LPCPD# | ATest | 1 | 40 | 33 | 38 | 37 | 36 | 35 | 34 | 33 | 32 | ₂ 30 | LAD0 |
| ATest | 2 | 27 | SERIRQ | GND | 2 | | | | | | | | | | 29 | GND |
| ATest | 3 | 26 | LAD0 | SB3V | 3 | | | | | | | | | | 28 | V _{cc} |
| GND | 4 | 25 | GND | GPIO6 | 4 | | | | | | | | | | 27 | LAD1 |
| SB3V | 5 | 24 | V _{cc} | NC | 5 | | | | | | | | | | 26 | LFRAME# |
| GPIO6 | 6 | 23 | LAD1 | Testl | 6 | | | | | | | | | | 25 | LCLK |
| NC | 7 | 22 | LFRAME# | TestBl | 7 | | | | | | | | | | 24 | LAD2 |
| Testl | 8 | 21 | LCLK | V_{cc} | 8 | | | | | | | | | | 23 | V _{cc} |
| TestBI | 9 | 20 | LAD2 | GND | 9 | | | | | | | | | | 22 | GND |
| V_{cc} | 10 | 19 | V_{cc} | NBO | 10 | _ | OI. | ~ | 4 | 10 | 9 | _ | œ | 0 | 21 | LAD3 |
| GND | 11 | 18 | GND | | | | `` | ~ | - | 7 | <u>+</u> | - | _ | 19 | 20 | |
| NBO | 12 | 17 | LAD3 | | | NBO | NBO | NBO | NBO | NBO | NBO | NBO | NBO | CLKRUN# | #LE | |
| NBO | 13 | 16 | LRESET# | | | _ | 2 | 2 | 2 | 2 | 2 | 2 | 2 | KR | LRESET# | |
| NBO | 14 | 15 | CLKRUN# | | | | | | | | | | | CL | L R | |
| | | | | | | | | | | | | | | | | |





Figure 2-2. Atmel AT97SC3204 Block Diagram

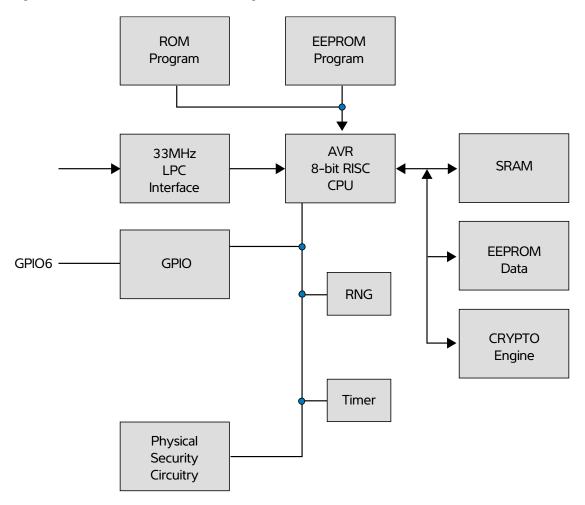

The TPM includes a hardware random number generator, including a FIPS-approved Pseudo Random Number Generator that is used for key generation and TCG protocol functions. The RNG is also available to the system to generate random numbers that may be needed during normal operation.

The chip uses a dynamic internal memory management scheme to store multiple RSA keys. Other than the standard TCG commands (TPM_FlushSpecific, TPM_Loadkey2), no system intervention is required to manage this internal key cache.

The TPM is offered to OEM and ODM manufacturers as a turnkey solution, including the firmware integrated on the chip. In addition, Atmel provides the necessary device driver software for integration into certain operating systems, along with BIOS drivers. Atmel will also provide manufacturing support software for use by OEMs and ODMs during initialization and verification of the TPM during board assembly.

Full documentation for TCG primitives can be found in the TCG TPM Main Specification, Parts 1 to 3, on the TCG Web site located at https://www.trustedcomputinggroup.org. TPM features specific to PC Client platforms are specified in the "TCG PC Client Specific TPM Interface Specification, Version 1.2", also available on the TCG web site. Implementation guidance for 32-bit PC platforms is outlined in the "TCG PC Client Specific Implementation Specification for Conventional BIOS for TCG Version 1.2", also available on the TCG web site.

4

3. Ordering Information

Table 1-2. Atmel AT24C256C Ordering Information

| Atmel Ordering Code | Package | | Operating Range |
|---------------------------|--------------------------|-----------------|--|
| AT97SC3204 ⁽¹⁾ | 28A2 (28-pin Thin TSSOP) | Lead-free, RoHS | Commercial (0°C to 70°C) Industrial (-40°C to 85°C) |
| AT97SC3204 ⁽¹⁾ | 28A3 (28-pin TSSOP) | Lead-free, RoHS | Commercial (0°C to 70°C) Industrial (-40°C to 85°C) |
| AT97SC3204 ⁽¹⁾ | 40ML1 (40-pin QFN) (2) | Lead-free, RoHS | Commercial (0°C to 70°C) Industrial (-40°C to 85°C) |


Notes: 1. Please see the Atmel AT97SC3204 datasheet addendum for the complete catalog number ordering code







4. Package Drawing

28A2 - Thin TSSOP

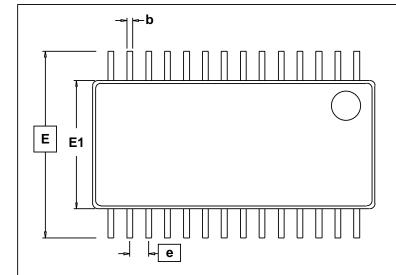





COMMON DIMENSIONS

(Unit of Measure = mm)

- Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusions and gate burrs shall not exceed .15mm (.006 in) per side.
- Dimension "E1" does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed .25mm (.010 in) per side.
- Dimension 'b' does not include Dambar protrusion. Allowable
 Dambar protrusion shall be 0.08 mm total in excess of the 'b'
 dimension at maximum material condition. Dambar cannot be
 located on the lower radius of the foot. Minimum space between
 protrusion and adjacent lead is 0.07 mm.
- 4. Dimension 'D' and 'E1' to be determined at Datum Plane H.

| SYMBOL | MIN | NOM | NOTE | |
|--------|------|-----------|------|-----|
| D | 9.60 | 9.70 | 9.80 | 1,4 |
| E | | 6.40 BSC | ; | |
| E1 | 4.30 | 4.40 | 4.50 | 2,4 |
| Α | | | 1.20 | |
| A2 | 0.80 | 1.00 1.05 | | |
| b | 0.19 | | 0.30 | 3 |
| е | (| | | |
| L | 0.45 | 0.60 | 0.75 | |
| L1 | | 1.00 REF | | |

This drawing is for general information only. Please refer to JEDEC Drawing MO-153, Variation AE for additional information.

6/17/08




Package Drawing Contact: packagedrawings@atmel.com


| IIILE | |
|-------|--|
| , , | 9.7 mm Body, 0.65 pitch, utline Package (TSSOP) |
| | |


| GPC | DRAWING NO. | REV. |
|-----|-------------|------|
| TFL | 28A2 | В |

28A3 - TSSOP

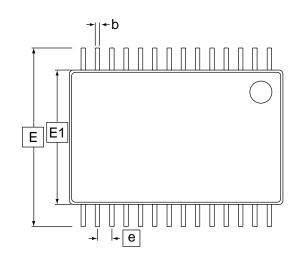

Top View

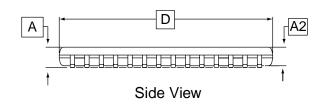



End View

COMMON DIMENSIONS


(Unit of Measure = mm)

| SYMBOL | MIN | NOM MAX | | NOTE |
|--------|-------------|----------------|------|------|
| D | 9.60 | 9.70 | 9.80 | 2, 5 |
| Е | | 8.10 BSC | | |
| E1 | 6.00 | 00 6.10 6.20 | | |
| Α | 1.20 | | | |
| A2 | 0.80 | 0.80 1.00 1.05 | | |
| b | 0.19 – 0.30 | | 4 | |
| е | 0.65 BSC | | | |
| L | 0.45 | 0.60 | 0.75 | |
| L1 | | 1.00 REF | | |

Note: 1. This drawing is for general information only. Please refer to JEDEC Drawing MO-153, Variation DB for additional information.

- 2. Dimension D does not include mold Flash, protrusions or gate burrs. Mold Flash, protrusions and gate burrs shall not exceed 0.15 mm (0.006 in) per side.
- 3. Dimension E1 does not include inter-lead Flash or protrusions. Inter-lead Flash and protrusions shall not exceed 0.25 mm (0.010 in) per side.
- 4. Dimension b does not include Dambar protrusion. Allowable Dambar protrusion shall be 0.08 mm total in excess of the b dimension at maximum material condition. Dambar cannot be located on the lower radius of the foot. Minimum space between protrusion and adjacent lead is 0.07 mm.
- 5. Dimension D and E1 to be determined at Datum Plane H.


1/8/02







40ML1 - QFN

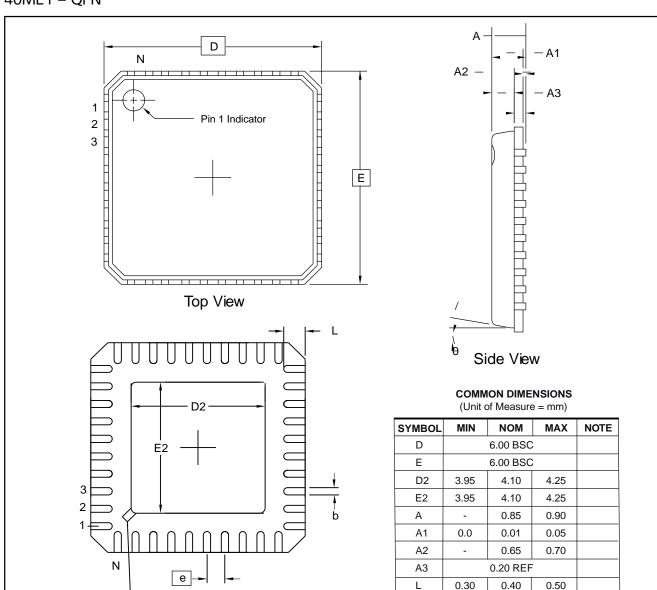

Note: 1. This drawing is for general information only. Refer to JEDEC Drawing MO-220, Variation WJJD-2, for proper dimensions, tolerances, datums, etc.

Dimension b applies to metallized terminal and is measured between 0.15 mm and 0.30 mm from the terminal
tip. If the terminal has the optional radius on the other end of the terminal, the dimension should not be
measured in that radius area.

| 2325 Orchard Parkway | TITLE | DRAWING NO. | REV. |
|----------------------|---|-------------|------|
| San Jose, CA 95131 | 40ML1, , 40-lead 6.0 x 6.0 mm Body, 0.50 mm Pitch, Molded Quad Flat No Lead Package (QFN) Punched | 40ML1 | С |

└ PIN1 ID

Bottom View

0.50 BSC

0.23

0.30

0.18

е

b

5. Revision History

| Doc. Rev. | Date | Comments |
|-----------|---------|---------------------------------------|
| 5294BS | 10/2010 | Added Industrial Grade support detail |
| 5294AS | 01/2008 | Initial document release |





Product Contact

Product Line

pcsecurity@atmel.com

Sales Contact

www.atmel.com/contacts

Literature Requests

www.atmel.com/literature

Atmel Corporation

2325 Orchard Parkway San Jose, CA 95131 USA

Tel: (+1)(408) 441-0311 **Fax:** (+1)(408) 487-2600

www.atmel.com

Atmel Asia Limited

Unit 01-5 & 16, 19F BEA Tower, Millennium City 5 418 Kwun Tong Road Kwun Tong, Kowloon HONG KONG

Tel: (+852) 2245-6100 Fax: (+852) 2722-1369

Atmel Munich GmbH

Business Campus Parkring 4 D-85748 Garching b. Munich **GERMANY**

Tel: (+49) 89-31970-0 Fax: (+49) 89-3194621

Atmel Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033 JAPAN

Tel: (+81)(3) 3523-3551 Fax: (+81)(3) 3523-7581

© 2010 Atmel Corporation. All rights reserved. / Rev.: 5294BS-TPM-10/10

Atmel®, logo and combinations thereof, CryptoAuthentication™ and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN THE ATMEL TERMS AND CONDITIONS OF SALES LOCATED ON THE ATMEL WEBSITE. ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY PRELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO. THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSS. OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and products descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for 8-bit Microcontrollers - MCU category:

Click to view products by Atmel manufacturer:

Other Similar products are found below:

 009936B
 CY8C20524-12PVXIT
 CY8C28433-24PVXIT
 MB95F012KPFT-G-SNE2
 MB95F013KPMC-G-SNE2
 MB95F263KPF-G-SNE2

 MB95F264KPFT-G-SNE2
 MB95F398KPMC-G-SNE2
 MB95F478KPMC2-G-SNE2
 MB95F562KPF-G-SNE2
 MB95F564KPF-G-SNE2

 MB95F634KPMC-G-SNE2
 MB95F636KWQN-G-SNE1
 MB95F696KPMC-G-SNE2
 MB95F698KPMC1-G-SNE2
 MB95F698KPMC1-G-SNE2
 MB95F698KPMC1-G-SNE2
 MB95F698KPMC2-G-SNE2
 MB95F698KPMC1-G-SNE2
 MB9