

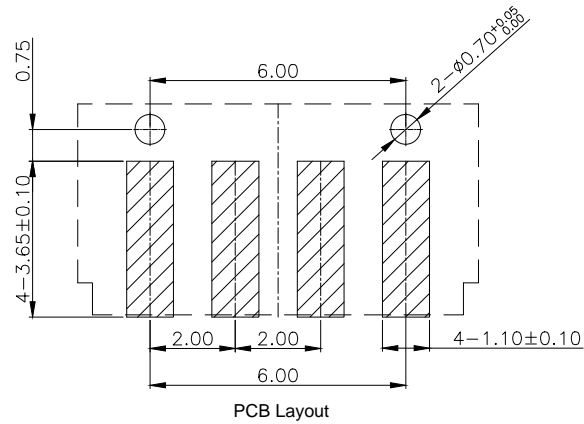
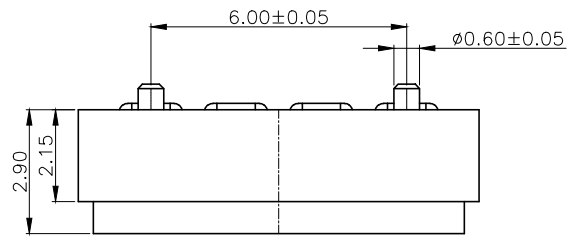
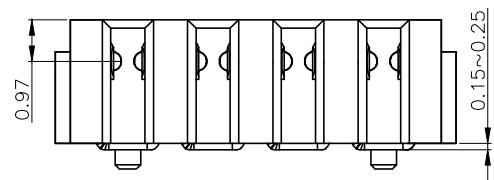
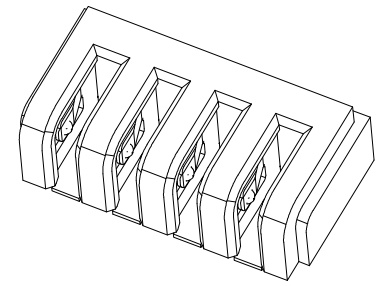
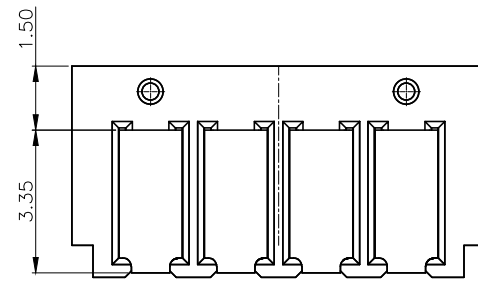


REV.	DATE	MODIFICATION	APPROVER



SPECIFICATION

- Mechanical performance:
 - 1.1 Insertion and extraction force:0.1~2.0kgf,
 - 1.2 Durability:3000 cycles .
- Electrical and environment performance
 - 2.1 Current rating:1A
 - 2.2 Voltage rating:8V
 - 2.3 Insulation resistance:100MΩ Min. at 500V DC(After Testing)
 - 2.4 Terminal contact resistance:30mΩ Max.
 - 2.5 Withstanding voltage:500V(r.m.s.)AC at 1mA Max. for one minute
 - 2.6 Operating temperature: -20℃~ +80℃

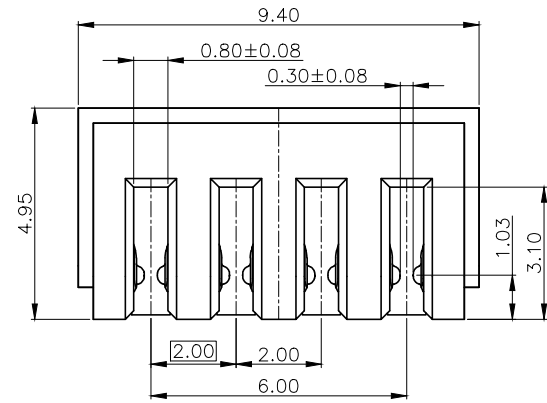

②	TERMINAL	COPPER ALLOY		
①	HOUSING	PA46	BLACK	UL94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

GENERAL TOLERANCE			
SELECT	TOL.	1	2
X.XXX	±0.10	±0.05	±0.15
X.XX	±0.15	±0.13	±0.25
X.X	±0.20	±0.25	±0.5
X.	±0.30	±0.38	±1.00
ANGLE	±2°		

UNITS	mm
MAT'L	
FINISH	
Q'TY	

NAME:	BATTERY 4P
PART NO:	BA20004-A290202
APPD:	<i>Faaron_Lee</i>
CHKD:	Vicky
DR:	DAVID

深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.			
TITLE: BATTERY 2.0mm 4P SMT H=2.9mm 带定位柱 端子镀金1u” 卷装		DWG NO. ATOM-A04485	
SCALE	SHEET	REV	
1:1	1 OF 1	AO	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cylindrical Battery Contacts, Clips, Holders & Springs](#) category:

Click to view products by [ATOM](#) manufacturer:

Other Similar products are found below :

[753-00001](#) [12BH36A-GR](#) [273](#) [183](#) [270](#) [274](#) [QX3506](#) [5220](#) [5230](#) [1055](#) [1088](#) [1102](#) [1101](#) [5250](#) [166](#) [1044](#) [1194](#) [KT0008](#) [2134167-1](#) [1012](#)
[1020](#) [1023](#) [1024C](#) [1025](#) [1027](#) [103](#) [1075](#) [1077](#) [1080](#) [1088](#) [1090](#) [1095](#) [1096](#) [1097](#) [1098](#) [1101](#) [1109](#) [1126](#) [1127](#) [1128](#) [1162](#) [1173](#) [BH383B](#)
[1199](#) [147](#) [148](#) [149](#) [150](#) [151](#) [152](#)