

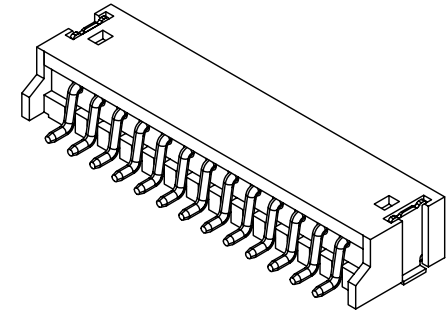
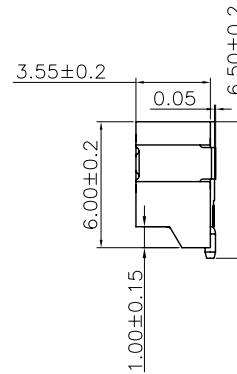
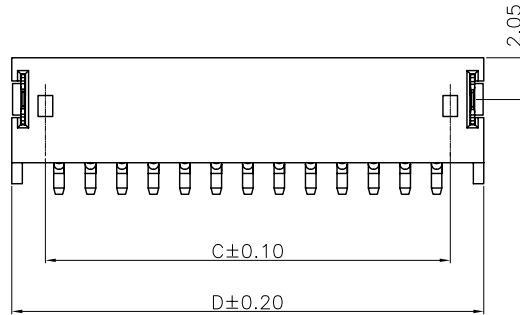
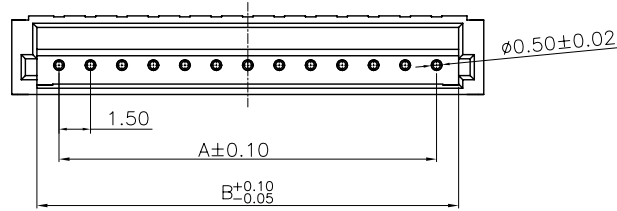


| REV. | DATE | ECN NO. | MODIFICATION | APPROVER |
|------|------------|---------|--------------|----------|
| A0 | 2018.01.06 | / | 精加工 | JASON |

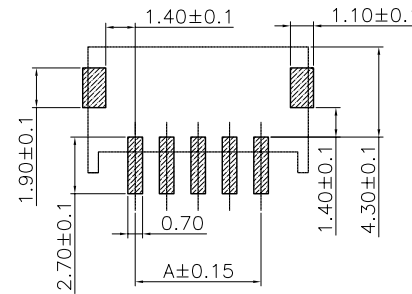

规格:
Specifications:

- 额定电流: 1A AC/DC (使用AWG#26时)
Current rating: 1A AC/DC (AWG#26)
- 额定电压: 125V AC/DC
Voltage rating: 125V AC/DC
- 使用温度范围: -25°C~+85°C (含通电时温度上升)
Temperature range: -25°C~+85°C (including temperature rise in applying electrical current)
- 接触电阻: 初期 / 20 mΩ 以下
环境试验后/30 mΩ 以下
Contact resistance: Initial value/10mΩ max
After environmental tests/20 mΩ max
- 绝缘电阻: 初期/500MΩ 以上
Insulation resistance: 500 MΩ min
- 耐电压: AC 800V/1分钟
Withstanding voltage: 500VAC/minute
- 适用电线范围: AWG#32~#26
Applicable wire: AWG#32 to #26
- 适合的印刷电路板厚度: 0.6mm, 1.2mm, 1.6mm
Applicable PC board thickness: 0.6mm, 1.2mm, 1.6mm
- 主体材料: Thermoplastic, UL94-V0, 天然色
Housing material: Thermoplastic, UL94-V0, natural
- 端子材料: 黄铜, 镀锡
Terminal material: brass, plating Tin



PCB LAYOUT

| 极数 | 尺寸 | | | | ATOM料号 |
|----|-------|-------|-------|-------|---------------|
| | A | B | C | D | |
| 2 | 1.50 | 3.60 | 2.80 | 6.00 | WF150**-01*** |
| 3 | 3.00 | 5.10 | 4.30 | 7.50 | |
| 4 | 4.50 | 6.60 | 5.80 | 9.00 | WF15004-01202 |
| 5 | 6.00 | 8.10 | 7.30 | 10.50 | |
| 6 | 7.50 | 9.60 | 8.80 | 12.00 | WF15006-01202 |
| 7 | 9.00 | 11.10 | 10.30 | 13.50 | |
| 8 | 10.50 | 12.60 | 11.80 | 15.00 | |
| 9 | 12.00 | 14.10 | 13.30 | 16.50 | |
| 10 | 13.50 | 15.60 | 14.80 | 18.00 | |
| 11 | 15.00 | 17.10 | 16.30 | 19.50 | |
| 12 | 16.50 | 18.60 | 17.80 | 21.00 | |
| 13 | 18.00 | 20.10 | 19.30 | 22.50 | WF15013-01201 |
| 14 | 19.50 | 21.60 | 20.80 | 24.00 | |
| 15 | 21.00 | 23.10 | 22.30 | 25.50 | |

| | | | | | |
|--|----------|-------------------------|---|--|--|
| GENERAL TOLERANCE | UNITS mm | NAME (INTENDED USE) | ATOM 深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD. | | |
| SELECT <input checked="" type="checkbox"/> | MAT'L | WAFER 1.5 PITCH SMT | TITLE: | | |
| TOL. ON: 1 2 3 | FINISH | PART NO. (INTENDED USE) | WAFER 1.5MM XP SMT 卧贴 | | |
| X.XXX ±0.15 ±0.05 ±0.15 | Q'TY | WF150**-01*** | DWG NO.: | | |
| X.XX ±0.25 ±0.13 ±0.25 | | APPD: | ATOM-A03814 | | |
| X.X ±0.30 ±0.25 ±0.50 | | CHKD: | SCALE SHEET REV. | | |
| X. ±0.38 ±0.38 ±1.00 | | DR: TOM | 1:1 1/1 A0 | | |
| ANGLE ±5° | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [ATOM](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)