
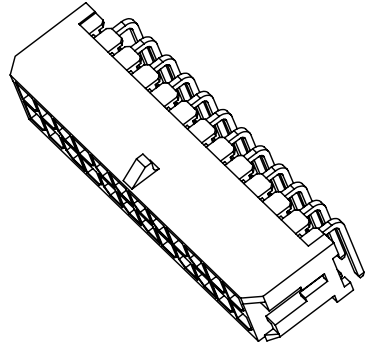
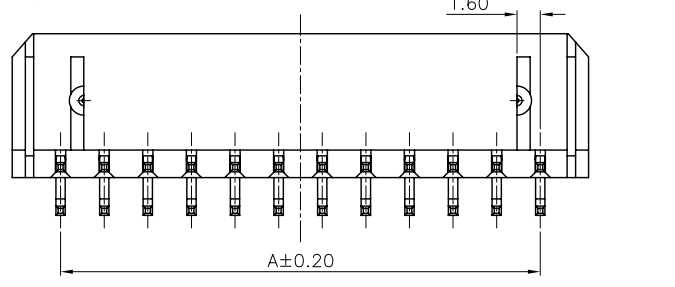
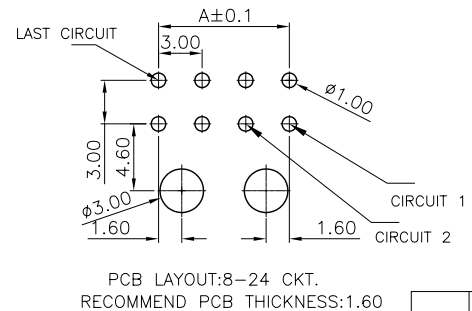
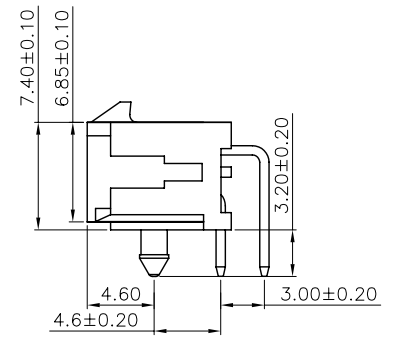
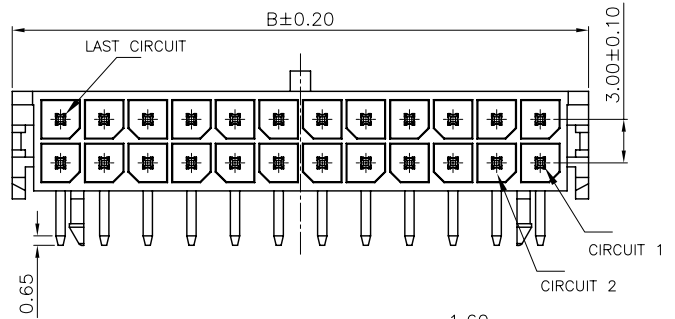



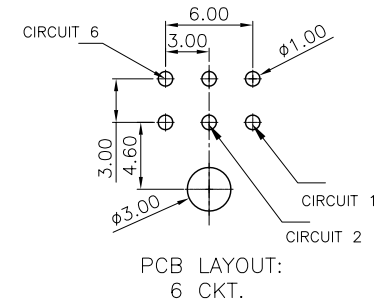


ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

REV	DATE	ECN NO.	MODIFICATION	APPROVER
B	2010/12/17	RD00310121701	版本升级	HYQ

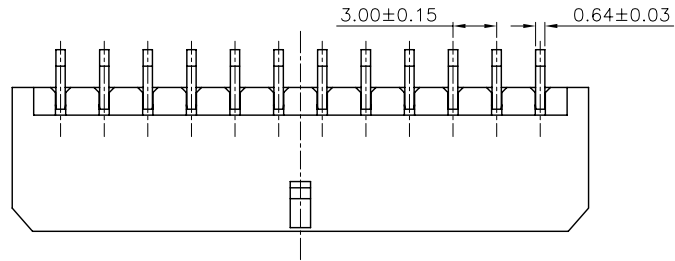

SPECIFICATION


- Material:
  - Housing: Thermoplastic, UL 94V-0, COLOR:BLACK.
  - Pin MATERIAL : BRASS ALLOY
  - FINISH: TIN PLATED OVER NICKEL PLATED
- Electrical Characteristics:
  - Voltage rating: 250V AC(RMS) or DC.
  - Current rating : 2.5A(max).
  - Operating Temperature: -25°C~+85°C.
  - Insulation resistance: 1000M ohms min. at 500VDC
  - Dielectric withstanding voltage: 1000 VAC/1minute.
  - Contact resistance: 20m ohms max.
- Applicable Wire:AWG#30~#20

Pin	DIMENSION	
	A	B
02	6.65	6.65
04	9.65	9.65
06	12.65	12.65
08	15.65	15.65
10	18.65	18.65
12	21.65	21.65
14	24.65	24.65
16	27.65	27.65
18	30.65	30.65
20	33.65	33.65
22	36.65	36.65
24	39.65	39.65


GENERAL TOLERANCE	UNITS	NAME:	ATOM® 深圳市爱特姆科技有限公司		
SELECT	mm	Wafer 3.0mm 2*XP	SHENZHEN ATOM TECHNOLOGY CO.,LTD.		
TOL.	MAT'L	PART NO:	TITLE:		
1 2 3		WF300** -08**	Wafer 3.0mm 2*XP 90° 塑胶定位柱		
X.XXX	FINISH	APPD:	DWG NO.		
±0.10±0.05±0.15		hyq	ATOM-A01469		
X.XX	Q'TY	CHKD:	SCALE SHEET REV		
±0.15±0.13±0.25		Vicky	1:1 1/2 B		
X.X		DR:			
±0.20±0.25±0.5		Aimee			
X.					
±0.30±0.36±1.00					
ANGLE					
±2'					

ACAD GENERATED DRAWING. DON'T CHANGE BY HAND


REV	DATE	ECN NO.	MODIFICATION	APPROVER
B	2010/12/17	RD00310121701	版本升级	HYQ

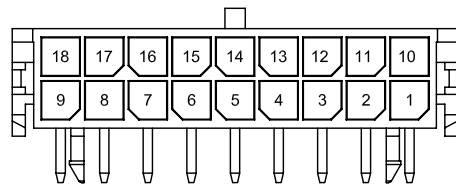


18-CKT.




10-CKT.




2-CKT.

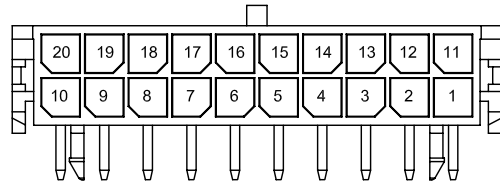


20-CKT.




12-CKT.




4-CKT.

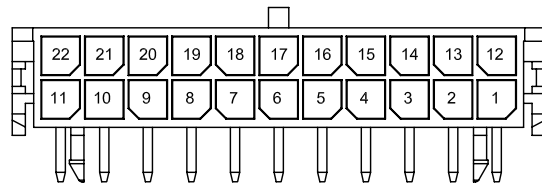


22-CKT.

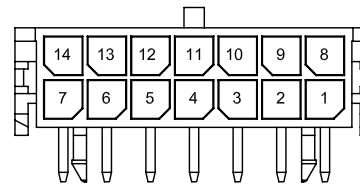


14-CKT.




6-CKT.

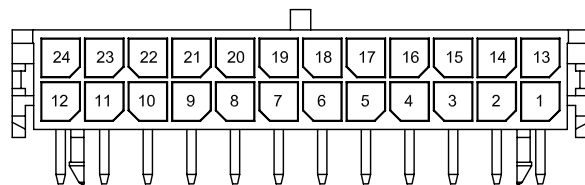

24-CKT.

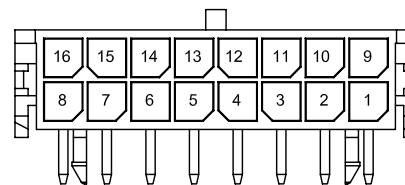

16-CKT.



8-CKT.

2\*1P--2\*12P 结构对照图

GENERAL TOLERANCE			UNITS	NAME:	深圳市爱特姆科技有限公司 SHENZHEN ATOM TECHNOLOGY CO., LTD.
SELECT	<input checked="" type="checkbox"/>		mm	Wafer 3.0mm 2*XP	
TOL.	1	2	MAT'L	PART NO:	TITLE:
ON.				WF300**--08***	Wafer 3.0mm 2*XP 90° 塑胶定位柱
X.XXX	±0.10	±0.05	FINISH	APPD:	DWG NO.
X.XX	±0.15	±0.13		hyq	ATOM-A001469
X.X	±0.20	±0.25	Q'TY	CHKD:	SCALE
X.	±0.30	±0.36		Vicky	1:1
ANGLE	±2'			DR:	SHEET
				Aimee	2/2
					REV
					B

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [ATOM](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)