




PCIe® Gen 4 NVMe M.2 2280 SSD

The Global Leader in Specialized Storage and Memory Solutions

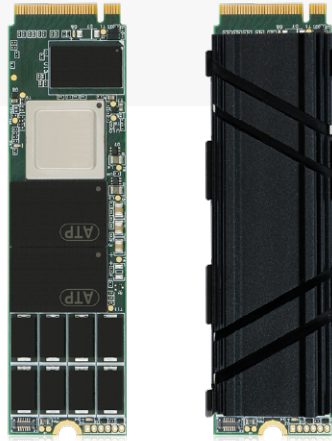

Key Features

- Superior Read/Write performance
- MCU-based Power Loss Protection Design with Level 4 (data-in-flight) protection*
- Self-Encrypting Drive (SED) with AES 256-bit Encryption, TCG Opal 2.0*
- Thermal Heatsink Solutions**
- End-to-End Data Path Protection
- Anti-sulfuric resistor support*

* May vary by product and project support
 ** Customization available on a project basis.

ATP NVMe™ M.2 2280 SSDs with the PCI Express® (PCIe®) Gen 4 x4 interface meet the growing need for high-speed data transfer in today's demanding applications.

Up to 3.84 TB capacity, support for I-Temp (40°C to 85°C: N615Si) or C-Temp (0°C to 70°C: N601Sc) operation, plus AES 256-bit encryption and TCG Opal 2.0 security make these SSDs ideal for read/write-intensive mission-critical applications, such as data logging, surveillance, and imaging systems.

With twice the bandwidth of the previous generation (8 GT/s), PCIe Gen 4's 16 GT/s data rate translates to a bandwidth of 2 GB/s for every PCIe lane, enabling these SSDs to transfer data faster. ATP's PCIe Gen 4 SSDs use x4 lanes for a maximum bandwidth of 8 GB/s.

Thermal management options for optimal heat dissipation include a nickel-coated copper heat spreader on controller and a 4 mm or 8 mm fin-type heatsink design.

Technologies & Add-On Services	S.M.A.R.T.	Firmware-based Power Loss Protection	Hardware-based Power Loss Protection	AutoRefresh	Advanced Wear Leveling	Dynamic Data Refresh	End-to-End Data Path Protection	Auto-Read Calibration	Secure Erase	TCG Opal 2.0	Industrial Temperature	Anti-Sulfur Resistors	Conformal Coating
Superior	○	○	○	○	○	○	○	○	▲	▲	○	▲	▲

▲: Customization option available on a project basis.

Specifications

PCIe® Gen 4 NVMe M.2 2280 SSD		
Product Line	Superior	
	N651SI	N601Sc
Interface	PCIe G4 x4	
Flash Type	3D TLC	
Form Factor	M.2 2280-D6-M ¹	M.2 2280-D2-M
Operating Temperature	-40°C to 85°C	
Power Loss Protection Options	Hardware + Firmware Based or Firmware Based	Firmware Based
Optional SED Features	AES 256-bit Encryption, TCG Opal 2.0	
Capacity	240 GB to 3.84 TB	
Performance		
Sequential Read (MB/s) up to	6,450	
Sequential Write (MB/s) up to	6,050	
Random Reads IOPS up to	1,094,000	
Random Writes IOPS up to	1,191,000	
Endurance and Reliability		
Endurance (TBW) ² up to	10,760 TB	
Reliability MTBF @ 25 °C	>2,000,000 hours	
Others		
Dimensions (mm)	80.0 x 22.0 x 3.85 80.0 x 24.4 x 12.5 (with 8 mm heatsink)	80.0 x 22.0 x 3.6 80.0 x 24.4 x 12.5 (with 8 mm heatsink)
Certifications	CE, FCC, BSMI, UKCA, RoHS, REACH	
Warranty	2 years	

- M.2 2280-D6-M form factor (max height: 3.85mm), offers Hardware Based Power Loss Protection. M.2 2280-D2-M form factor (max height: 3.6mm), provides Firmware Based Power Loss Protection.
- Under highest Sequential write value. May vary by density, configuration and applications.

Hot Items Ordering Information					
Product Line	Capacity ₁	Operating Temperature ₂	Power Loss Protection ₃	SED ₄	P/N
N601Sc	240GB	-0°C to 70°C	Firmware Based	-	AF240GSTJA-HBAXX
N601Sc	480GB	-0°C to 70°C	Firmware Based	-	AF480GSTJA-HBAXX
N601Sc	960GB	-0°C to 70°C	Firmware Based	-	AF960GSTJA-HBAXX
N601Sc	1920GB	-0°C to 70°C	Firmware Based	-	AF1T92STJA-HBAXX
N601Sc	3840GB	-0°C to 70°C	Firmware Based	-	AF3T84STJA-HBAXX
N601Sc	240GB	-0°C to 70°C	Firmware Based	√	AF240GSTJA-HBBXX
N601Sc	480GB	-0°C to 70°C	Firmware Based	√	AF480GSTJA-HBBXX
N601Sc	960GB	-0°C to 70°C	Firmware Based	√	AF960GSTJA-HBBXX
N601Sc	1920GB	-0°C to 70°C	Firmware Based	√	AF1T92STJA-HBBXX
N601Sc	3840GB	-0°C to 70°C	Firmware Based	√	AF3T84STJA-HBBXX

- Amount of actual usable storage that can be utilized.
- Refers to Case Temperature range during device operation, as indicated by SMART temperature attributes.
- Hardware + Firmware-based power loss protection design with Level 4 (data-in-flight) protection; Firmware-based power loss protection design with Level 1 (data-at-rest) protection.
- Allows data written to and read from the SSD to be constantly and automatically encrypted and decrypted. Conforms to TCG Opal 2.0 and uses AES 256-bit HW encryption.

Product spec and its related information are subject to change without advance notice.
Please refer to www.atpinc.com for latest information

v1.0 062023

© Copyright 2023 ATP Electronics, Inc. All rights reserved.



The Global Leader in Specialized Storage and Memory Solutions

WE BUILD WITH YOU

ATP TAIWAN (HQ)

TEL: +886-2-2659-6368
sales-apac@atpinc.com

ATP USA

TEL: +1-408-732-5000
sales@atpinc.com

ATP EUROPE

TEL: +49-89-374-9999-0
sales-europe@atpinc.com

ATP JAPAN

TEL: +81-3-6260-0797
sales-japan@atpinc.com

ATP CHINA

TEL: +86-21-5080-2220
sales@cn.atpinc.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Drives - SSD category](#):

Click to view products by [ATP Electronics manufacturer](#):

Other Similar products are found below :

[MTFDDAC512MAM-1K1](#) [MX30LF4G18AC-XKI](#) [SM668GE4-AC P0122](#) [SDUFD33-016G](#) [SD7SN6S-128G-1122](#) [MTFDDAA120MBB-2AE1ZABYY](#) [SM668GXB-ACS O1118](#) [SDSDAA-016G](#) [SDINADF4-64G-H](#) [MTFDDAA240MBB-2AE1ZABYY](#) [SQF-SDMM2-256G-S9E2403291](#) [MTFDKBA1T0TFH-1BC1AABYY](#) [SFSA032GM2AK1TB-I-EB-51K-STD](#) [SFSA064GM2AK2TB-I-EB-51K-STD](#) [SFSA960GS2AK2TB-C-XC-21E-STD](#) [SFSA032GM2AK1TB-I-EB-11K-STD](#) [SFSA160GM2AK1TB-I-XC-11K-STD](#) [SFSA480GM2AK1TB-C-XC-11E-STD](#) [SFSA960GM2AK2TB-I-XC-21E-STD](#) [SFSA064GV2AK2TB-I-EB-21K-STD](#) [SFSA480GS2AK4TB-I-EB-21E-STD](#) [SFSA960GM2AK2TB-C-XC-51E-STD](#) [SFSA032GV2AK1TB-I-EB-21K-STD](#) [SFSA320GV2AK2TB-I-XC-21K-STD](#) [SFSA480GS2AK4TB-C-EB-21E-STD](#) [SFSA960GM2AK2TB-I-XC-51E-STD](#) [SFSA960GS2AK2TB-I-XC-21E-STD](#) [MTFDKBA1T0TGE-1BK1AABYY](#) [MTFDDAK480TGB-1BC15TAYY](#) [SQF-S25Z4-256GDSDE](#) [SQF-SMSZ2-64GDSDE](#) [SQF-S25Z1-64GDSDE](#) [79700-G12801TC14-RS](#) [VTPM24CECI240-0011](#) [VTPM24CECI120-0011](#) [VTPM28CECI480-0011](#) [VTPM28CECI240-0011](#) [AF1TSTIC-ZH1](#) [SFSA160GV2AK4TB-I-EB-21K-STD](#) [SFSA064GM2AK2TB-I-EB-21K-STD](#) [SFSA960GM2AK2TB-C-XC-21E-STD](#) [SFSA160GM2AK4TB-I-EB-61K-STD](#) [SFSA480GM2AK4TB-I-EB-61E-STD](#) [SFSA320GM2AK2TB-I-XC-51K-STD](#) [SFSA480GM2AK1TB-I-XC-11E-STD](#) [SFSA480GM2AK4TB-C-EB-61E-STD](#) [SFSA320GM2AK2TB-I-XC-21K-STD](#) [SQF-SMSZ2-64GDSDC](#) [AF240GSTJA-8BCIP](#)