

DATE CODE: 9195 (YWWD)
 Y=YEAR (2019)
 WW=WEEK (01-52)
 D=DAY (1-7)

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 0.5A per pin
 - 1.2 Voltage Rating: 10V DC
 - 1.3 Contact Resistance: Initial 50mΩ, after 100mΩ Max.
 - 1.4 Insulation Resistance: 100MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VAC
2. MECHANICAL
 - 2.1 Terminal Durability: 5,000 cycles
 - 2.2 Contact Normal Force: 0.3N min. per pin
 - 2.3 Open & Lock Durability: 100 cycles
 - 2.4 Open & Lock Force: 1.5N~20N with card
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C~+105°C
 - 3.2 Storage temperature range: -40°C~+105°C
 - 4.1 Recommended IR Reflow Temperature: 260°C
4. SOLDER ABILITY

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	PROS	2019/08/13
1.1	add note	PROS	2019/09/02

NO.	PART NAME	DESCRIPTION
1	INSULATOR	LCP, UL94V-0, Black
2	CONTACT	Copper alloy C5210-SH, 0.15t, 10u" Gold plating on contact area, Gold flash on solder area, under plating 50u" Nickel
3	SHELL	Stainless Steel SUS304, 0.2t
4	GROUND	Stainless Steel SUS304, 0.20t, Gold flash on solder area, under plating 50u" Nickel


UNIT:	DECIMAL	LINEAR	ANGLES
mm	X	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°

UNLESS OTHERWISE SPECIFIED TOLERANCE

SCALE	SHEET	SIZE	FILE NAME
2.5/1	1/2	A4	115V-AD00_B.1.1





DRAWN	FROS	2019/05/20	
CHECKED	Tim	2019/05/20	
APPROVED	Ken	2019/05/20	
DRAWN NAME: Nano SIM Socket Hinge Type			
PRODUCT NO. 115V-AD00			
www.attend.com.tw			

Recommended Layout (top view)
General Tolerance: $\pm 0.05\text{mm}$




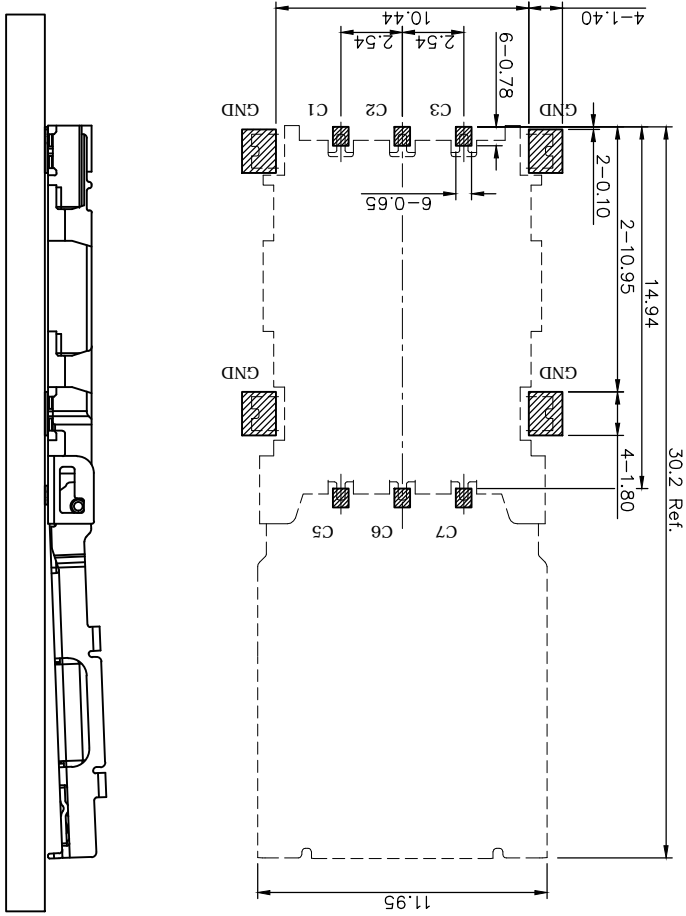


Install a Nano SIM Card

Lift up the shell between 90 to 120 degree angles (Pic. 1). This is an appropriate range to install a Nano SIM Card (Pic. 2). The shell can be fixed when it is lifted to over 90 degree angles. It will be more convenient for user to install a Nano SIM Card. On the other hand, user can find a proper angle to install the card till the shell is unfold (Pic. 3)

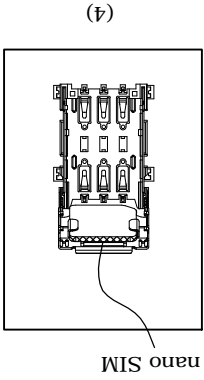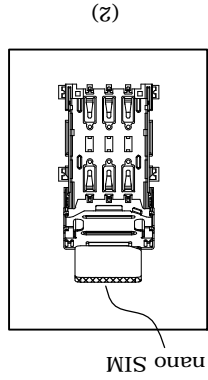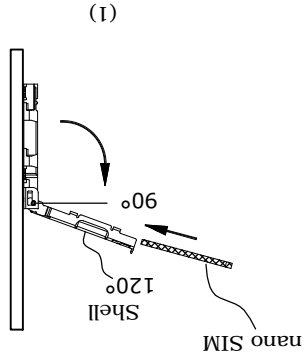

Close the shell to make it contact with the terminal (Pic. 5), when the card is installed into the slot (Pic. 4). Press the shell with a finger pulp (Pic. 6) till flat to the bottom (Pic. 7). In the meantime, pull the shell and make it slide to the lock position to fix it (Pic. 8).



UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT: DECIMAL LINEAR ANGLES

mm

X.X ± 0.50

X.XX ± 0.25

X.XXX ± 0.12

$\pm 1^\circ$



www.attend.com.tw

DRAWN NAME: Fros

CHECKED: Tm

APPROVED: Ken

SCALE: N/A

SHEET: 2/2

SIZE: A4

FILE NAME: 115V-AD00_B.1.1

PRODUCT NO.: 115V-AD00

2019/05/20

2019/05/20

2019/05/20

Nano SIM Socket Hinge Type

6 Pin 10u" Reel

115V-AD00_B.1.1

10

REV. DESCRIPTION




see sheet one

DRAWN DATE

9

DATE

10

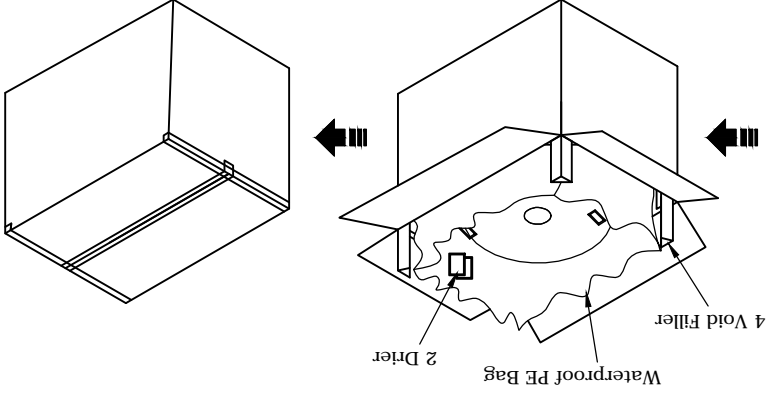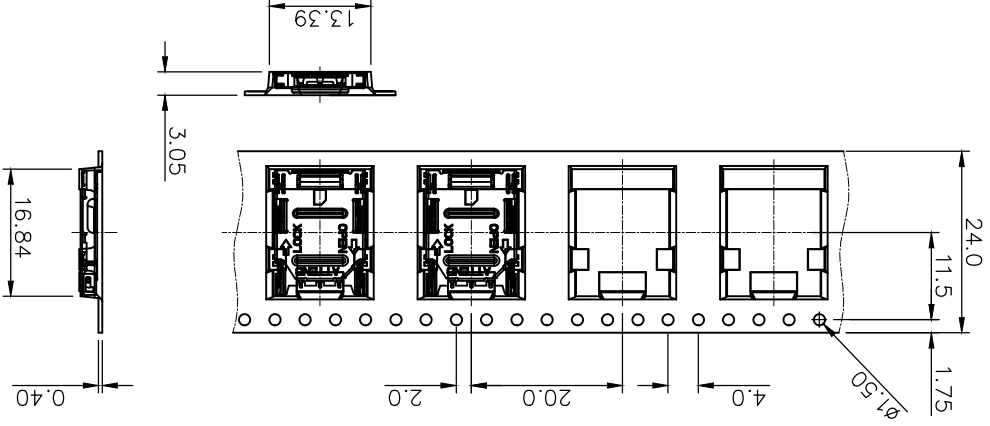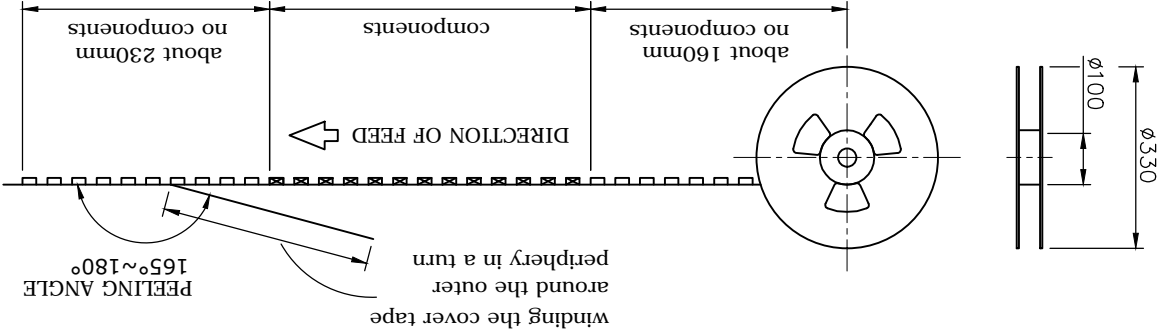

PACKAGING SPECIFICATION:

1. MATERIAL
 - 1.1 Embossed Carrier Tape: PS Black
 - 1.2 Top Cover Tape: PET
 - 1.3 Taping Reel: Plastic
2. PACKING
 - 2.1 Quantity:
 - 1,000 Piece/Reel
 - 10 Reel/ Carton
 - 10,000 Piece/ Carton

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2019/05/20

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°

UNLESS OTHERWISE SPECIFIED TOLERANCE



DRAWN NAME: Nano SIM Socket Hinge Type
 CHECKED: Tm
 APPROVED: Ken
 PRODUCT NO. 115V-AD00
 FILE NAME 115V-AD00_D_1

Carton L*W*H=355*355*355

10 9 8 7 6 5 4 3 2 1

A

B

C

D

E

F

G

A

B

C

D

E

F

G

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Memory Card Connectors](#) category:

Click to view products by [Attend manufacturer](#):

Other Similar products are found below :

[M10-597810-355](#) [M21-033321-005](#) [6426-201-21343](#) [69.920.0553.0](#) [MCR60A-98D-2.54DSA\(70\)](#) [FCN-568P068-G/07-4V](#) [809180410000000](#)
[95622-003LF](#) [AD2-262F-38900-232](#) [DM3AT-SF-PEJM5\(41\)](#) [EN2997S72039F6](#) [N7E50-7516PG-20-WF](#) [IC11S-BUR-PNEJL\(71\)](#) [NX30TA-](#)
[15PAA\(50\)](#) [21920-5](#) [2041353-2](#) [FUA006-3220-0](#) [308-DS1P0811-192](#) [33CFAE-DN](#) [MI21A-50PD-SF-EJR\(91\)](#) [502431-1011](#) [5175651-2](#) [10-](#)
[247926-166](#) [10-629549-258N](#) [11327-001](#) [11327-002](#) [EN2997S02039B8](#) [EN2997S61212BN](#) [EN2997S72039B6](#) [EN2997SE02039B8](#)
[EN2997SE61212BN](#) [EN2997SE72039B6](#) [603020000](#) [617230001](#) [71-252718-32P](#) [NX1-32T-KT3K\(05\)](#) [95622-003LF](#) [91-570124-15P](#)
[192900-0488](#) [N7E50-U516RB-50-SIN0005](#) [DM1AA-SF-PEJ](#) [95079-00CALF](#) [84648-056HLF](#) [68-580163-21S](#) [33DVIR-29S12R](#)
[SF58S006VBBR2000](#) [93-570123-08P](#) [GMC020080HR](#) [125A-78C00](#) [1010040575#](#)