

FEATURES

- 9VDC to 58VDC in a 1VDC increments
- Active Power Factor Correction
- Short Circuit, Over Load and Over Voltage Protection
- Optional Over Temperature Protection
- UL/cUL EN 60950 2nd Edition
- CE Compliant
- 1U Height
- RoHS Compliant

260W Open Frame Power Supply SP-250 Series



SPECIFICATION

Model	SP-250-09-B	SP-250-12-B	SP-250-20-B	SP-250-24-B	SP-250-48-B	SP-250-58-B	
Output R	Voltage (1)	9V	12V	20V	24V	48V	4.5A
	Current Range	0 ~ 20A	0 ~ 21.67A	0 ~ 13A	0 ~ 10.83A	0 ~ 5.42A	0 ~ 4.5A
	Rated Power	180W	260W	260W	260W	260W	260W
	Ripple & Noise (Max) (2)	1% Pk to Pk					
	Voltage Adjustment Range	± 10%					
	Voltage Tolerance	±5%					
	Line Regulation	±0.5%					
	Load Regulation	±1%					
	Setup, Rise Time	All output shall reach their steady state values within 3 Sec. of turn on					
	Holdup Time	16mS min.					
Input Requirements	Voltage	90V ~ 264VAC					
	Frequency	47Hz / 63Hz					
	Efficiency (Typ. @ 115V AC)	75%	85%	85%	85%	85%	85%
	AC Current (max.)	4.0A @ 120VAC					
	Inrush Current (max.)	Will not exceed 30A / 115VAC, Cold Start, 25°C					
	Leakage Current	<300 uA					
Protections	Over Current	110-130 % rated output power Hiccup mode, recovers automatically after fault condition is removed					
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage	110% ~ 150% rated output voltage Hiccup mode, recovers automatically after fault condition is removed					
Environmental Conditions	Temperature Range	Operational	0°C ~ 50°C with 290 LFM forced air-cooling and or 80 Watts convection cooled.				
		Storage	- 40 ~ +80°C				
	Working Humidity	Operational	20 ~ 90% RH non-condensing				
		Storage	5 ~ 95% R.H				
	Temperature Coefficient	±0.05%/°C typical on all outputs					
Vibration	3G, 10-25Hz, 15min. Per cycle for each axis (X, Y, Z)						



Model	SP-250-09-B	SP-250-12-B	SP-250-20-B	SP-250-24-B	SP-250-48-B	SP-250-58-B
Safety & EMC	Safety Standards	UL (60950-1:2001) , cUL, DEMKO and CB				
	Withstand Voltage	I/P - O/P: 3KVAC (4242 DC), 10mA for 1 minute				
	Isolation Resistance	I/P - O/P, I/P - case: 10M Ohms / 500VDC				
	EMI Conduction & Radiation	EN55022 , FCC Class B				
	EMS Immunity	EN61204, EN61000-3-2, EN61000-3-3				
Others	MTBF	30K HRS Compliance: MIL-HDBK-217F				
	Dimension (L*W*H)	127*83.82*38.1 (mm) - 5.0*3.3*1.5 (inch)				
	Weight	0.18kg - 0.40Lb				


PIN ASSIGNMENT		
Connector	AC	DC
	Input	Output
PIN 1	Line	+V
PIN 2	NC	+V
PIN 3	Neutral	+V
PIN 4	NC	+V
PIN 5	Ground	+V
PIN 6		-V
PIN 7		-V
PIN 8		-V
PIN 9		-V
PIN 10		-V
PIN 11		+S (remote Sense)
PIN 12		-S
Connector	Molex 26-60-4050	Molex 26-60-4120

SHIPPING SPECIFICATIONS			
Series	UNITS PER CARTON	CARTON WEIGHT	
SP-250	20.0	12.34 Kgs	27.21 Lbs

INDIVIDUAL BOX DIMENSION		WIDTH	LENGTH	HEIGHT
Series	Inch	14.00	15.00	10.00
SP-250	MM	355.6	381.0	254.0



SPECIFICATION

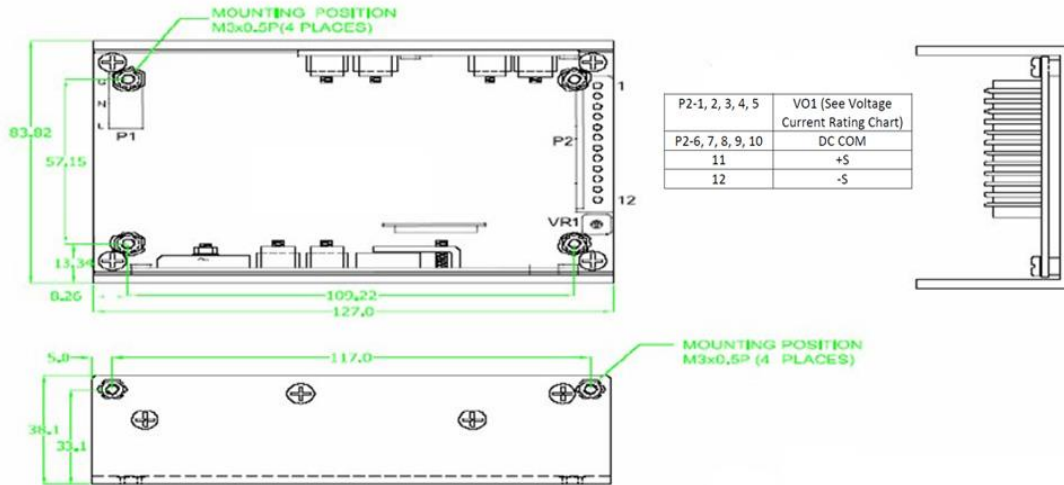

NOTES:

1. This family is from 9V to 58V in 1VDC increment, please consult Autec Sales with the right model # for your application.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance: includes set up tolerance, line regulation and load regulation.
4. Line regulation is measured from low line to high line at rated load.
5. Load regulation is measured from 0% to 100% rated load.
6. Specification subject to change without notice.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Autec Power Systems](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [AAD600S-4-OP](#) [R22095](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [S-15F-12](#) [LDIN100150](#) [LPM000-BBAR-01](#) [LPX17S-C](#)
[EVS57-10R6/R](#) [FDC40-24S12](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#) [432703037161](#)
[WRB01X-U](#) [LPX140-C](#) [08-30466-1040G](#) [09-160CFG](#) [70841004](#) [70841025](#) [VPX3000-CBL-DC](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#)
[LPM124-OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [DMB-EWG](#) [TVQF-](#)
[1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [XPFM201A+](#) [MAP80-4000G](#) [LFP300F-24-TY](#) [SMP21-L20-DC24V-5A](#) [VI-MUL-ES](#) [08-30466-](#)
[0065G](#) [CME240P-24](#) [VI-RU031-EWWX](#) [08-30466-0028G](#) [S82Y-TS01](#)