


AVERY DENNISON MARKETING SPECIFICATION



NOT TO SCALE

LOOPED TENSILE STRENGTH:	18 LBS. / 80N MINIMUM
OPERATING TEMPERATURE	-4°F (-20°C) TO 185°F (85°C)
MATERIAL:	NYLON 6/6
WEIGHT:	.016 OZ./ .46 GRAMS
BUNDLE DIAMETER:	ø4.76mm/.188" TO ø 22.2mm / .875"
MIN. INSTALLATION TEMP.	5°F (-15°C)
APPLICATION TOOL:	TOOL, HAND ADJUSTABLE, FOR PLASTIC TIE DOWN STRAP. AVERY DENNISON PART NUMBER 12001.
TOOL TENSION SETTING:	1-3
PACKAGED IN:	SEE TABLE

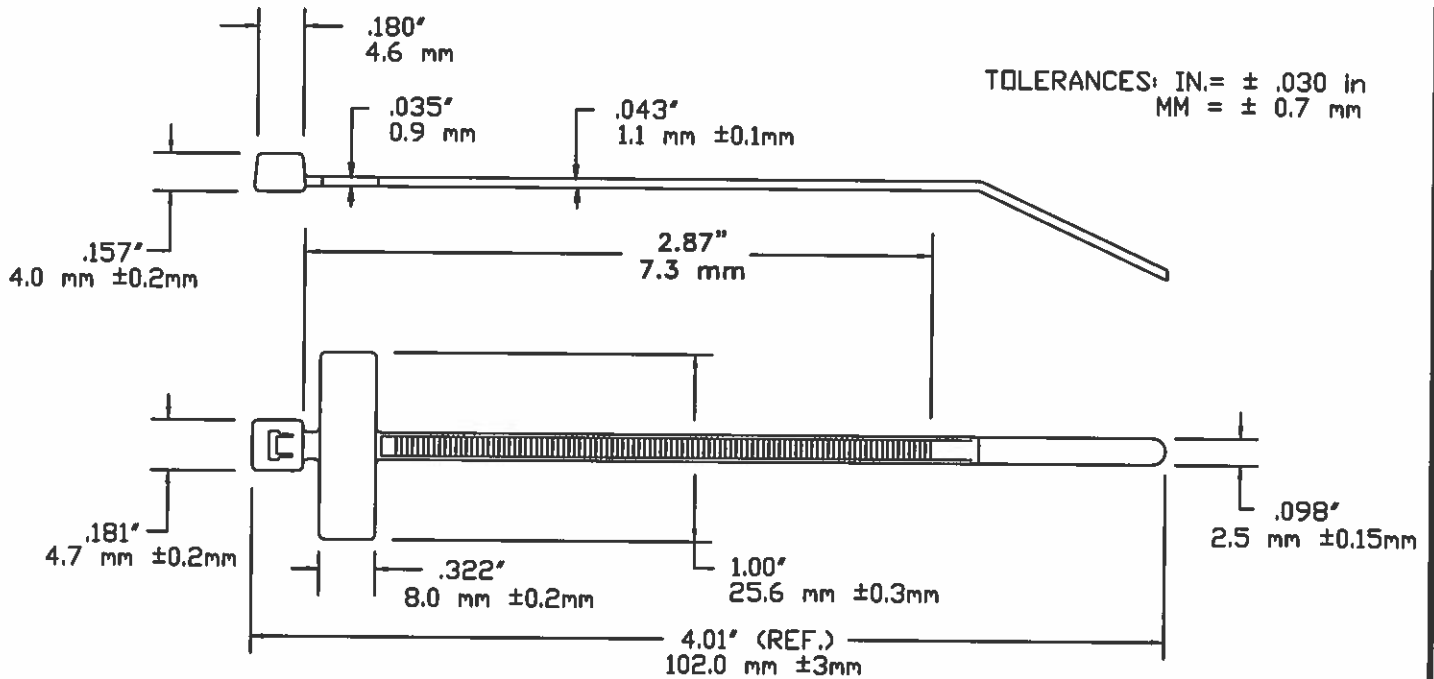

STK.NO	COLOR	PACKAGED IN
08412-2	NATURAL	1000/BAG, 5000/CASE
08417-2	NATURAL	100/BAG, 5000/CASE
10031-2	WHITE	1000/BAG, 5000/CASE



AVERY DENNISON

FASTENER DIVISION
 FITCHBURG, MA 01420 U.S.A.
 TEL 1-800-225-5913
 MA. 978-353-8157

THESE CABLE TIES HAVE A FLAMMABILITY RATING OF V-2

DESCRIPTION:

4" CABLE TIE, MINIATURE IDENTIFICATION

APPROVAL: Q.A.:

Linda Boyle 625-15

STOCK NO.

SEE TABLE

REV
A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Labels & Markers](#) category:

Click to view products by [Avery Dennison](#) manufacturer:

Other Similar products are found below :

[89078GBEST](#) [89082GBESR](#) [89082GBEST](#) [PCL025-4](#) [5761-2SF](#) [58400](#) [586R734H02](#) [M1.040.0000.6](#) [CRS-CM5M](#) [CRS-M18M](#) [CS1836-000](#) [CS8626-000](#) [CU6337-000](#) [CU6342-000](#) [CU6343-000](#) [CWD01-0](#) [CWD012-0](#) [CWD012-7](#) [CWD015-3](#) [CWD015-7](#) [CWD02-0](#) [CWD02-3](#) [CWD02-4](#) [CWD02-6](#) [CWD02-8](#) [CWD02-A](#) [CWD02-D](#) [CWD02-H](#) [CWD02-K](#) [CWD02-L](#) [CWD02-M](#) [CWD02-P](#) [CWD02-Q](#) [CWD02-R](#) [CWD02-U](#) [CWD02-W](#) [CWD02-Y](#) [CWD03-+](#) [CWD03-0](#) [CWD03-P](#) [CWD06-0](#) [CWD06-8](#) [CWD06-9](#) [CWD06-L](#) [CWD06-N](#) [CWD09-0](#) [CWD09-5](#) [CWD09-7](#) [6806810001](#) [CZ2857-000](#)