




7.0×5.0mm

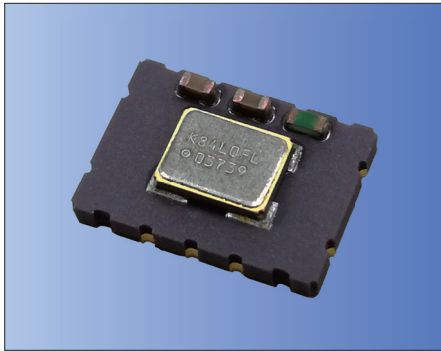

RoHS Compliant

Features

- High stability and high reliability
- 2.7 to 5.5V drive available
- Clipped sine wave or CMOS level output
- Low phase noise
- Disable Function (KT7050A)

Applications

- 5G, Smallcell, Stratum3
- SONET/ SDH/ Ethernet

How to Order

KT7050 □ 20000 K A W 33 T xx
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①Series	②Land Type		
③Output Frequency	A	10Pads	
④Freq. Temp. Chrst.	B	4Pads	
⑤Lower Operating Temp.	⑥Upper Operating Temp.		
KAW	±0.28×10 ⁻⁶	-40°C	+85°C
⑦Supply Voltage	⑧Voltage Control Function		
33	3.3V	T	TCXO
		Spec. Code*	VCTCXO

*Please contact us for Spec. Code.

⑨Individual Specification

Packaging (Tape & Reel 1000 pcs./ reel)

- Compliant to the GR1244-Core & GR253-Core
- Recommended in Microsemi's ZLAN-68 app. note for Stratum3 applications based on tests performed by Kyocera.



Specifications

Item	Symbol	Conditions	Min.	Max.	Unit	
Output Frequency Range	f _o	Standard Frequency: 10, 19.2, 20, 24.576, 26, 30.72, 38.88, 40	10	40	MHz	
Frequency Tolerance	f _{tol}	vs Temperature (-40 to +85°C) [±(f _{max} -f _{min})/ 2f _o]	-0.28	+0.28	× 10 ⁻⁶	
		vs Voltage	-0.1	+0.1		
Supply Voltage	V _{cc}		+2.7	+5.5	V	
Current Consumption	I _{cc}	CMOS Output	—	6	mA	
Frequency Aging	f _{age}	20years aging @40°C Including temp characteristics, initial tolerance, rated power supply voltage change and load change.	-4.6	+4.6	× 10 ⁻⁶	
Voltage Control Range	f _{cont}	Positive *100k ohm min	±5	±20	× 10 ⁻⁶	
Output Level	V _{pp}	Clipped Sine, Load: 10k ohm // 10pF	0.8	—	Vp-p	
Low Level Output Voltage	V _{oL}	CMOS, Load: 15pF I _{oL} =4mA	—	10% V _{cc}	V	
High Level Output Voltage	V _{oH}	CMOS, Load: 15pF I _{oH} =-4mA	90% V _{cc}	—	V	
Rise / Fall Time (10%V _{cc} to 90%V _{cc})	Tr/ Tf	CMOS, Load: 15pF	—	8	ns	
Symmetry	SYM	50% V _{cc}	45	55	%	
Phase Noise	—	@20MHz	@10Hz offset	—	-90	dBc/ Hz
			@100Hz offset	—	-120	
			@1kHz offset	—	-140	
			@10kHz offset	—	-150	
			@100kHz offset	—	-150	

* Please contact us for other specifications.



Crystal Oscillators

Dimensions

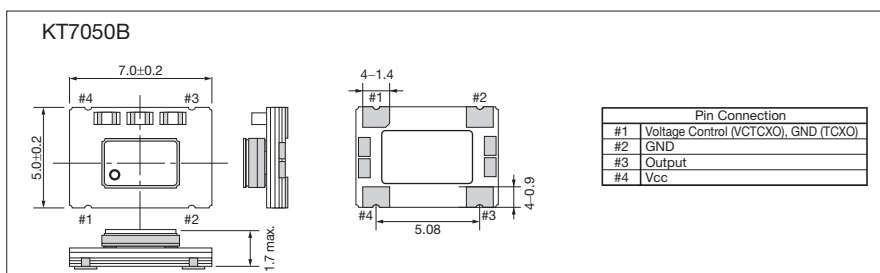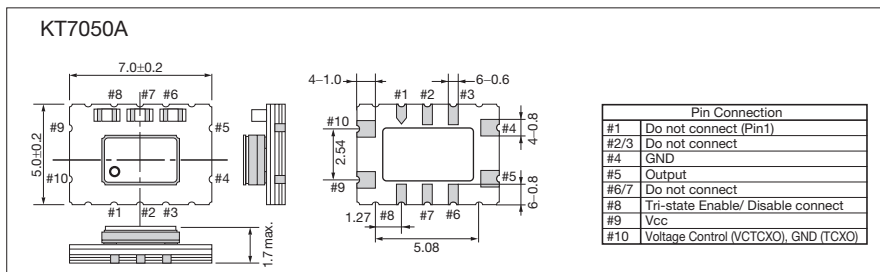

Recommended Land Pattern

(Unit: mm)

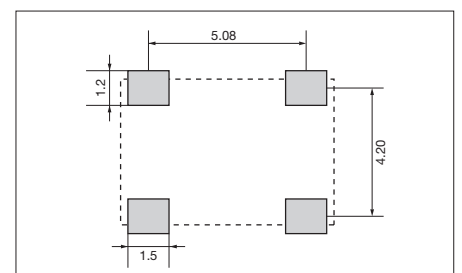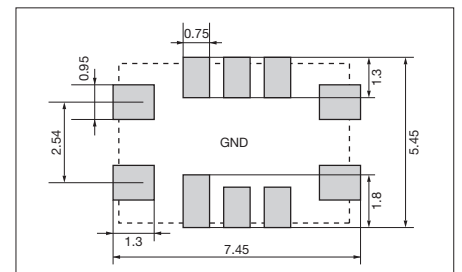

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [AVX](#) manufacturer:

Other Similar products are found below :

[SiT5000AI-3D-33E0-10.000000X](#) [SIT5002AI-8C-33N0-100.000000X](#) [AST3TQ-40.000MHZ-1](#) [SIT5021AI-2DD-33E-100.000000X](#)
[THD3031035LK280005-10.0M](#) [DS32KHZST&R](#) [JT3251P0040.000000](#) [SiT5000AC-3E-33E0-19.440000Y](#) [XTCLH26M000TJJA6P0](#)
[XTCLH25M000TJJA5P0](#) [XTCLH19M200TJJC3P0](#) [TG2016SMN 38.4000M-MCGNNM3](#) [TG2016SMN 48.0000M-MCGNNM3](#)
[TG2016SMN 19.2000M-ECGNNM3](#) [TX-8010-EAE-2870-12M800](#) [ECS-TXO-32CSMV-200-EN-TR](#) [CVT32-20.000](#) [ASTX-H11-](#)
[27.000MHZ-T](#) [VT-803-EAE-206A-52M0000000](#) [SIT5356AI-FQ-33E0-25.000000X](#) [DS32KHZSN#T&R](#) [ECS-TXO-2520-33-120-AN-TR](#)
[ECS-400-18-33-JGN-TR](#) [ECS-320-18-33-JEM-TR](#) [ECS-320-10-33-JTL-TR](#) [ECS-320-10-33-AGM-TR](#) [581L200X2ITT](#) [LFPTXO000009Bulk](#)
[AST3TQ-V-40.000MHz-50-C](#) [AST3TQ-T-15.360MHz-28](#) [LFPTXO000316Bulk](#) [SiT1568AI-JE-DCC-32.768E](#) [LFPTXO000295Bulk](#)
[AST3TQ-T-20.000MHz-28](#) [LFPTXO000068Bulk](#) [AST3TQ-V-30.720MHz-28](#) [LFPTXO006980Bulk](#) [XTCLH50M000CHJA3P0](#)
[LFPTXO000291Bulk](#) [AST3TQ-V-20.000MHz-28](#) [LFPTXO000268Bulk](#) [AST3TQ-T-40.000MHz-28](#) [AST3TQ-T-16.384MHz-28](#)
[ABDFTCXO-20.000MHz-L-2-CT](#) [LFTCXO073004Cutt](#) [KT2520K25000ZAW18TDS](#) [VT-803-EAH-1060-48M0000000](#) [LFTCXO077226Cutt](#)
[LFTCXO077227Cutt](#) [LFTCXO077231Cutt](#)