


SHB213

PICMG 1.3 Half-size CPU Card with Socket G2 2nd Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® HM65, VGA, SATA3, USB 3.0 and Dual LANs

Features

- Socket G2 (rPGA 988B) 2nd gen Intel® Core™ i7/i5/i3 and Celeron® processor (Sandy Bridge)
- Intel® HM65 chipset (optional Intel® QM67 chipset)
- 2 DDR3-1066/1333 SO-DIMM, up to 8GB
- Supports Intel® HD graphics

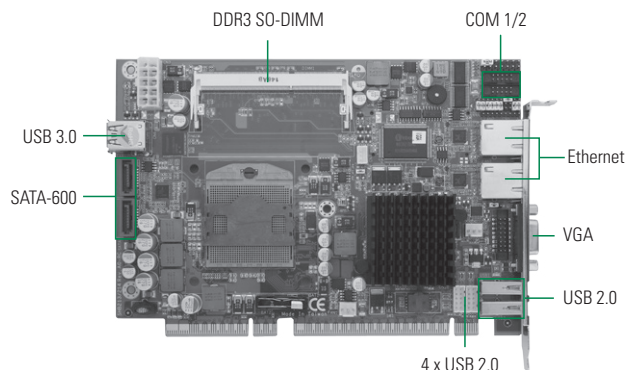

Core System

CPU	Socket G2 (rPGA 988B) 2nd gen Intel® Core™ i7/i5/i3 and Celeron® processor (Sandy Bridge)
System Memory	2 x 204-pin DDR3-1066/1333 SO-DIMM, up to 8GB
Chipset	Intel® HM65 (Intel® QM67 as option)
BIOS	AMI UEFI BIOS
SSD	1 x CFast™
Watchdog Timer	225 levels, 1 ~ 255 sec.
Expansion Interface	1 x PCIe x16 1 x PCIe x4 or 4 x PCIe x1
Battery	Lithium 3v/220 mAh
Power Requirements	Intel® Core™ i7-2710QE @ 2.1 GHz, 8GB DDR3 (HM 65) +5VSB @ 0.1A, +12V @ 1.8A, +3.3V @ 2.5A
Size	185 x 126mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (+32°F ~ +140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x RS-232/422/485 (COM 1) 1 x RS-232 (COM 2)
SATA	2 x SATA-600 (straight, 180, blue) Optional RAID 0/1 (only for Intel® QM67)
Hardware Monitoring	Detect CPU/System temperature, voltage and fan speed
Ethernet	2 ports as 10/100/1000 Mbps support WOL, RPL/PXE boot ROM with Realtek RTL8111E
Audio	N/A
USB	2 x USB 3.0 (right angle, 90) 6 x USB 2.0 (4 x internal, 2 x external)
SMBus	System Management Bus for advanced monitoring/control

Display

Chipset	Intel® HD graphics
Memory Size	Max. up to 352 MB frame buffer dedicated memory
Display Interface	1 x VGA

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59384500200E	COM x 2 w/ bracket, P=2.0 mm, L=250 mm	1
593826A0000E	SATA signal cable 500 mm	1

Ordering Information

Standard

SHB213VGG-HM65 (P/N: E38C213101)	PICMG 1.3 half-size CPU card with Socket G2, Intel® HM65, VGA, SATA3, USB 3.0, 2 GbE LANs
SHB213VGG-QM67 (P/N: E38C213100)	PICMG 1.3 half-size CPU card with Socket G2, Intel® QM67, VGA, SATA3, USB 3.0, 2 GbE LANs

Optional

59382631000E	2 x USB 2.0 wafer cable with bracket, L=180 mm
--------------	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [CPU & Chip Coolers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[HS-56M0-C1](#) [FR2UFAN60HSW](#) [1960058073N001](#) [19FFD124010HB2A7-000001-RS](#) [BXTS15A](#) [FHS-A9025S19](#) [EP-FNUPACTCLRDC](#)
[5078C111200E](#) [AP3505HX-J70-LF](#) [SK 570 25 SA](#) [BXSTS200P 915972](#) [SK 570 10 SA](#) [SK 571 25 SA](#) [SK 571 50 SA](#) [SK 578 15 SA](#)
[RAPID-100-2](#) [RAPID-135-6](#) [RAPID-L120](#) [RAPID-L240](#) [109P4412H8026](#) [1960048820N001](#) [BXSTS200PNRW 915971](#) [1960048819N001](#)
[CF-1150SE-R11](#) [1750000282](#) [AmITX-BT TM-FAN-ETT](#) [1960049408N001](#) [CF-775A-RS](#) [1960053207N001](#) [1960047670N001](#)
[1960047669N001](#) [1750001660](#) [MC30101V1-Q020-S99-PK](#) [664-P4505MX-G90-LF](#) [890SP-01000-A-100](#) [890SP-02000-A-100](#) [890SP-03000-](#)
[A-100](#) [890SP-01500-A-100](#) [109X7612H1126](#) [CC001](#) [FEX353521T710M2](#) [FHL313117T710T](#) [FHS-K8020S00](#) [EP-FNDCACTCLUPS](#)
[36099-0000-99-1](#) [38025-0000-99-0C06](#) [36099-0000-99-0](#) [LA 17/150 24V](#) [LA 27 K 150 ME 24 V](#) [LA 7/100 12V](#)