


CAPA110

3.5" Embedded SBC with AMD G-Series APU, AMD A50M, LVDS/DisplayPort/VGA, Dual LANs and Audio

Features

- AMD G-Series APU dual core T56N (1.65 GHz)
- 1 DDR3-1333 SO-DIMM, up to 4GB
- 2 SATA-600
- 6 USB 2.0 ports
- 4 COM ports
- DirectX 11 supported

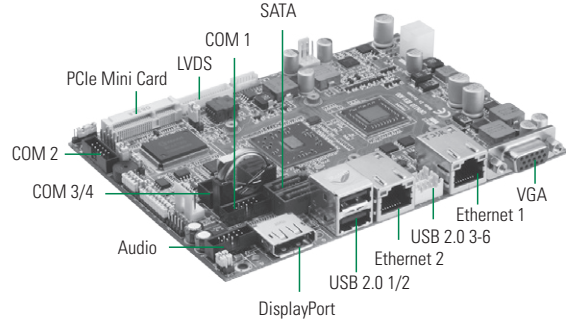


Core System

CPU	AMD G-Series APU T56N 1.65 GHz dual core onboard
System Memory	1 x 204-pin DDR3-1333 SO-DIMM, up to 4GB
Chipset	AMD A50M
BIOS	AMI UEFI BIOS
SSD	1 x CompactFlash™
Watchdog Timer	255 levels, 1 ~ 255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220mAh
Power Input	3. 2 x 2-pin connector +12V DC-in only AT Auto Power ON function supported
Power Requirement	AMD G-Series APU T56N @ 1.65 GHz, 1GB DDR3 Max. RMS: +12V @ 1.5A
Size	146 x 104mm
Board Thickness	1.6 mm
Operating Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x RS-232/422/485 (COM 1 with +5V/+12V powered) 3 x RS-232 (COM 2-4 with +5V/+12V powered)
SATA	2 x SATA-600
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	2 port 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111E
Audio	HD Codec audio as MIC-in/Line-in/Line-out/Speaker-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control (optional)
Digital I/O	8 channels IN/OUT programmable

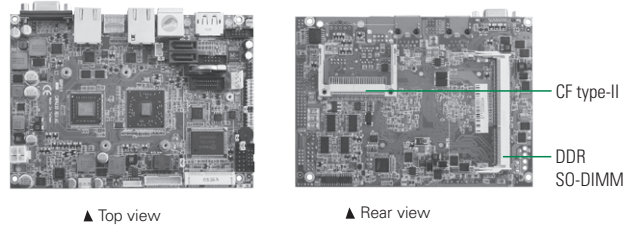

Display

Chipset	AMD G-series APU integrated graphic engine T56N - Radeon™ HD6320
Memory Size	Max. up to 2GB in 4GB DDR3 module
Display Interface	1 x VGA 1 x DisplayPort 1 x LVDS; 18/24-bit single/dual channel

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59382620000E	1 x COM w/ bracket, P=2.0 mm, L=300 mm	1
59384500100E	Audio cable w/ bracket, P=2.0 mm, L=450 mm	1
594E8422800E	2 x USB 2.0 wafer cable w/ bracket, 180 mm	1

Optional

59380000300E	2 x COM w/ bracket, P=1.27 x 2.54, L=300 mm
59070213000E	DisplayPort to VGA cable, L=100 mm
59040131000E	DisplayPort to DVI cable, L=220 mm
59050203000E	DisplayPort to HDMI cable, L=185 mm
59091501000E	DisplayPort to DisplayPort cable, L=1500 mm

Ordering Information

Standard

CAPA110VPGA-T56N (P/N: E38E110105)	3.5" Embedded SBC with AMD G-Series APU T56N 1.65 GHz, VGA/DisplayPort/LVDS, 2 GbE LANs, 2 SATA-600, 4 COM, 6 USB and audio
------------------------------------	-----------------------------------------------------------------------------------------------------------------------------



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#)
[ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-](#)
[IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#)
[IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY PROFESSIONAL](#) [GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#)
[A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-](#)
[S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-OLINUXINO-MICRO-E8GS16M-IND](#) [T2-OLINUXINO-MICRO-](#)
[S16M-IND](#)