
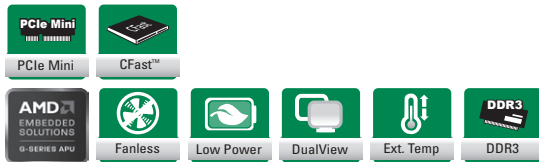
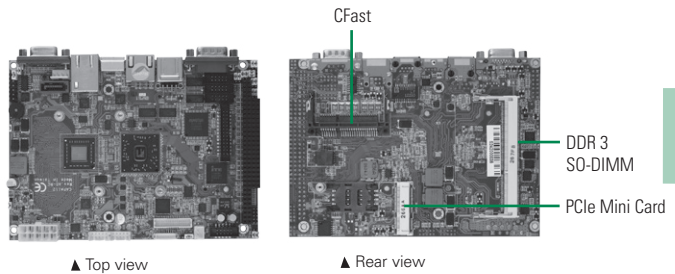


# CAPA112

3.5" Embedded SBC with AMD G-Series APU, AMD A55E, LVDS/VGA, Dual LANs, Audio, and PC/104

## Features

- AMD G-Series APU T16R (615 MHz)/ T40E (1.0 GHz)
- AMD A55E FCH
- 1 DDR3-1066 SO-DIMM, up to 4GB
- 6 USB 2.0 ports
- 4 COM ports
- 1 PC/104 for 16-bit ISA Bus

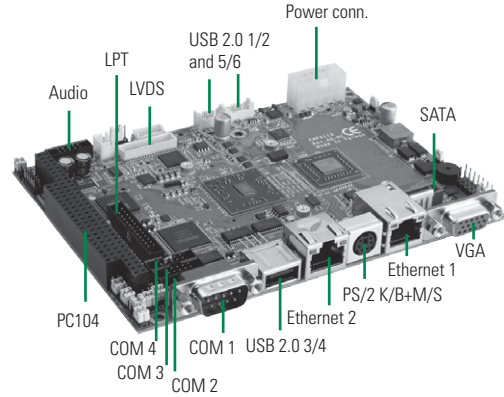

## Core System

CPU	AMD G-Series APU T16R 615 MHz single core/ T40E 1.0 GHz dual core onboard
System Memory	1 x 204-pin DDR3-1066 SO-DIMM, up to 4GB
Chipset	AMD A55E
BIOS	AMI UEFI BIOS
SSD	1 x CFAST™
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card 1 x PC/104 for 16-bit ISA bus
Battery	Lithium 3V/220MAH
Power Input	2 x 5-pin connector ATX standard power source DC+5V only (+12V is required for +12V powered COM and LVDS inverter) AT Auto Power ON function supported
Power Requirement	AMD G-Series APU T40E @ 1.0 GHz, 1GB DDR3 Max. RMS: +5VSB @ 4mA, +5V @ 3.92A, +12V @ 40mA
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	-40°C ~ +70°C (-40°F ~ 158°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

## I/O

MIO	1 x RS-232/422/485 (COM 1 with +5V/+12V powered) 3 x RS-232 (COM 2-4 with +5V/+12V powered) 1 x PS/2 keyboard and mouse 1 x LPT; with SPP/EPP/ECP supported
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	2 port 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111E
Audio	HD Codec audio as MIC-in/Line-in/Line-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels IN/OUT programmed

## Display

Chipset	AMD G-Series APU integrated graphic engine – Radeon™ HD6250
Memory Size	Max. up to 2GB in 4GB DDR3 module
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel

## Packing List

Standard		
Quick installation guide, user's manual/utility CD and cable		
Cable		
Part Number	Description	Qty
59382620000E	1 x COM w/bracket, P=2.0 mm, L=300 mm	1
59384500100E	Audio cable w/bracket, P=2.0 mm, L=450 mm	1
59382631000E	2 x USB 2.0 wafer cable w/bracket	1
59402010000E	ATX power cable 10P, L=150 mm	1

## Ordering Information

Standard	
CAPA112VGA-T16R (P/N: E38E112101)	3.5" Embedded SBC with AMD G-Series APU T16R 615 MHz and FCH A55E, VGA/LVDS, 2 GbE LANs and audio
CAPA112VGA-T40E (P/N: E38E112100)	3.5" Embedded SBC with AMD G-Series APU T40E 1.0 GHz and FCH A55E, VGA/LVDS, 2 GbE LANs and audio



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)  
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)  
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)  
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)  
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)  
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)  
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)  
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)  
[S16M-IND](#)