


# CAPA310 NEW

3.5" Dual Embedded SBC with Intel® Atom® x5-E3940 Processor, LVDS, HDMI, 2 GbE LANs and Audio

## Features

- Intel® Atom® x5-E3940 processor
- 1 DDR3L SO-DIMM for up to 8GB of memory
- 2 USB 2.0 and 4 USB 3.0
- 1 PCI Express Mini Card slot
- ZIO connector


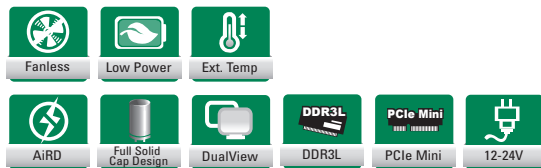


### Core System

CPU	Intel® Atom® x5-E3940 processor onboard
System Memory	1 x 204-pin DDR3L-1867 SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
SSD	1 x mSATA
Watchdog Timer	65536 levels, 1 to 65535 sec.
Expansion Interface	1 x Full-size PCI Express Mini Card slot 1 x USB, 1x PCIe x1, 1x LPC, 1 x SMBus through a ZIO connector
Battery Lithium	Lithium 3V/220mAH
Power Input	2 x 2 pin connector +12V to 24 VDC-in AT Auto Power On function supported
Power Requirements	Intel® Atom® x5-E3940 @1.6GHz 8GB DDR3L Max. RMS: +24V @0.8A
Dimensions	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	-40°C to +80°C (-40°F to 185°F)
Humidity	10% to 95% relative humidity, non-condensing

### I/O

SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	2 x 10/100/1000 Mbps Ethernet with Intel® i211-AT; support Wake-on-LAN, PXE Boot ROM
Audio	HD Codec audio as MIC-in/Line-in/Line out with Realtek ALC662
USB	2 x USB 2.0 4 x USB 3.0
Serial	1 x RS-232/422/485 1 x RS-232
TPM	ST ST33HTPH2E32AHA6 with TPM 2.0 compliant (optional)
SMBus	Yes
Others	1 x I <sup>2</sup> C
Digital I/O	8-channel in/out programmed

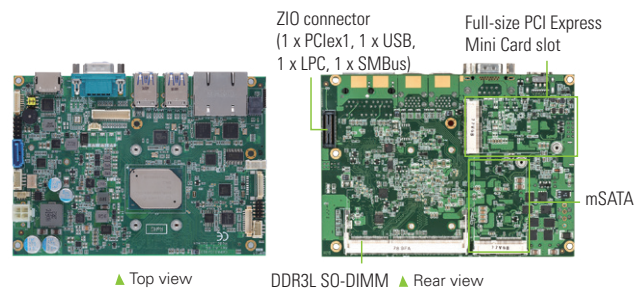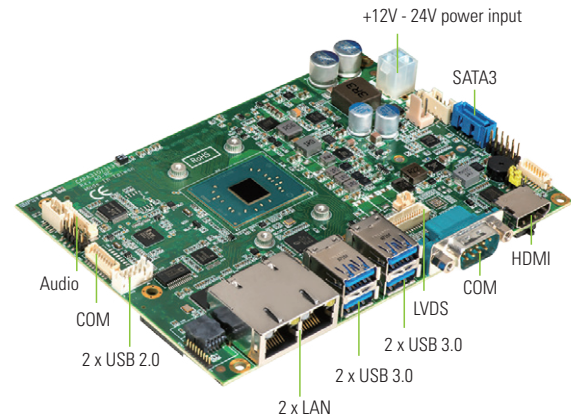

### Display

Chipset	Intel® integrated Gfx graphic engine
Memory Size	Share system memory
Display Interface	1 x HDMI 1 x LVDS; 18/24-bit single/dual channel 1 x VGA (optional)

### Packing List

<b>Standard</b>	Quick installation guide, User's Manual/Utility CD and heatsink
-----------------	---

### Ordering Information

<b>Standard</b>	CAPA310HGGA-E3940-ZIO (P/N: E38E310100)	3.5" embedded SBC with Intel® Atom® x5-E3940 processor (1.6 to 1.8 GHz, 2MB Cache, 9.5W), HDMI, LVDS, 2 GbE LANs, audio, ZIO and heatsink
-----------------	---	---

<b>Optional</b>	AX93262 (P/N: E393262100)	ZIO module for 2 RS-232/422/485, 2 RS-232, 1 PCI Express Mini Card slot
	AX93285 (P/N: E393285100)	ZIO module for 2 RS-232, 32-bit programmable DIO
	AX93291 (P/N: E393291100)	ZIO module for 2 RS-232, 2 GbE LAN
	AX93295 (P/N: E393295100)	ZIO module for 2 isolated RS-232, 2 USB 3.0
	59380880250E	COM port cable DB9-9 x 1-pin, P=1.25 mm, L=250 mm
	594E8422800E	2 x USB 2.0 cable with bracket L=180 mm
	E393A19100	AX93A19, SIM card slot board
	59312260020E	Audio cable with bracket, P=1.25 mm, L=450 mm

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)  
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)  
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)  
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)  
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)  
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)  
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)  
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)  
[S16M-IND](#)