


CAPA801

Intel® Atom™ N455/D425/D525
3.5" Embedded SBC with Intel® ICH8M,
LVDS/VGA, Dual LANs and Audio

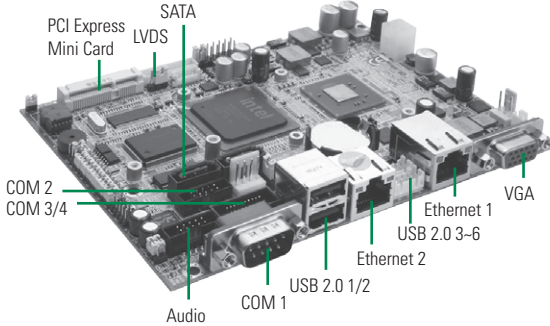

System


CPU	Intel® Atom™ processor N455 1.66 GHz, D425 1.8 GHz single core or D525 1.8 GHz dual core onboard
System Memory	1 x 204-pin SO-DIMM supports DDR3-667/800 max. up to 4 GB (N455 supports DDR3-667 max. up to 2 GB. D425/D525 supports DDR3-800 max. up to 4 GB)
Chipset	Intel® ICH8M
BIOS	AMI
SSD	1 x CompactFlash™ type-II
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220mAH
Power Input	2 x 2-pin connector +12V DC-in only AT Auto Power ON function supported
Power Requirements	*Intel® Atom™ N455 @1.66 GHz, 1 GB DDR3 Max. RMS: +12V @ 851mA *Intel® Atom™ D425 @1.8 GHz, 1 GB DDR3 Max. RMS: +12V @ 1.077A *Intel® Atom™ D525 @1.8 GHz, 1 GB DDR3 Max. RMS: +12V @ 1.145A
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	Standard: 0° ~ +60°C (32°F ~ 140°F) Optional: -20°C ~ +70°C (-4°F ~ +158°F)
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	3 x RS-232 (COM 2 ~ 4); with +5V/+12V powered 1 x RS-232/422/485 (COM 1); with +5V/+12V powered
SATA	2 x SATA-300
Hardware Monitoring	Detect system temperature, voltage and fan speed
Ethernet	1st port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® 82567V 2nd port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® 82583V
Audio	HD Codec audio as MIC-in/Line-in/Line-out/Speaker-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels IN/OUT programmable

Features

- Intel® Atom™ processor N455 (1.66 GHz), D425/D525 (1.8 GHz)
- 1 DDR3 SO-DIMM supports up to 4 GB memory capacity
- 6 USB 2.0 ports
- 4 COM ports
- PCI Express Mini Card expansion



▲ Top view



▲ Rear view

Display

Chipset	Intel® GMA 3150 graphics core
Memory Size	Intel® DVM T 4.0 compliant
Display Interface	1 x VGA 1 x LVDS; 18-bit single channel

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
59380000300E	2 x COM w/ bracket P=1.27 x 2.54 L=300 mm	1
59384500100E	Audio cable w/ bracket P=2.0 mm, L=450 mm	1
59382631000E	2 x USB 2.0 wafer cable w/ bracket 180 mm	1

Ordering Information

Standard

CAPA801VGG A-N455 (fanless)	3.5" Embedded SBC with Intel® Atom™ processor N455, VGA/LVDS, 2 GbE LAN, 4 COM, 6 USB and audio (P/N: E38E801100)
CAPA801VGG A-D525 (heatsink fan included)	3.5" Embedded SBC with Intel® Atom™ processor D525, VGA/LVDS, 2 GbE LAN, 4 COM, 6 USB and audio (P/N: E38E801102)

Optional/MOQ

CAPA801VGG A-D425 (heatsink fan included)	3.5" Embedded SBC with Intel® Atom™ processor D425, VGA/LVDS, 2 GbE LAN, 4 COM, 6 USB and audio (P/N: E38E801101)
AX95601	LVDS converter for scale up to 1920 x 1080 48bit (P/N: E395601100)
AX95601	LVDS converter for pixel compensated to 1280 x 1024 48bit (P/N: E395601101)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)
[S16M-IND](#)