

eBOX560-500-FL

Fanless Embedded System with Intel® Core™ i7-6600U/i5-6300U/i3-6100U & Celeron® 3955U, 2 HDMI, 2 GbE LAN, 4 USB 3.0, 2 COM and PCI Express Mini Card Slot

Features

- Intel® Core™ i7-6600U 3.4 GHz/i5-6300U 3 GHz/i3-6100U 2.3 GHz & Celeron® 3955U 2.0 GHz (Skylake ULT SoC)
- 260-pin DDR4 SO-DIMM for up to 16GB of memory
- 12 VDC power input
- Supports 2 HDMI, 2 GbE LAN, 2 COM and 4 USB 3.0
- Supports Jumbo Frame (9.5K), WoL, PXE and Teaming
- Ultra-compact enclosure design



Specifications

Standard Color	Silver-black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Core™ i7-6600U 3.4 GHz/i5-6300U 3 GHz/i3-6100U 2.3 GHz & Celeron® 3955U 2.0 GHz (Skylake ULT SoC)
System Memory	1 x 260-pin DDR4-2133 SO-DIMM, up to 16GB
Chipset	SoC integrated
BIOS	AMI
System I/O Outlet	1 x RS-232/422/485 1 x RS-232 2 x HDMI 2 x 10/100/1000 Mbps Ethernet (Intel® i210-AT, i219-LM) 4 x USB 3.0 2 x SMA-type antenna connector 1 x AT/ATX quick switch 1 x ATX power switch 1 x Reset button 1 x Screw type VDC power input connector
Watchdog Timer	255 levels, 1 to 255 sec.
Storage	1 x 2.5" SATA HDD drive bay (max. up 9.5 mm height) 1 x mSATA (enabled in BIOS setting)
Expansion Interface	1 x Full-size PCI Express Mini Card slot (USB + PCIe signal)
TPM	N/A
System Indicator	1 x Green LED for system power-on 1 x Orange LED for HDD active
Power Input	12 VDC
Operating Temperature	-10°C to +55°C (-14°F to +131°F) (with W.T. DRAM/SSD)
Humidity	10% - 95%, non-condensing
Vibration Endurance	3 Grms with SSD™ (5 to 500 Hz, X, Y, Z directions)
Dimensions	141.5 mm (5.57") (W) x 106 mm (4.17") (D) x 55 mm (2.17") (H)
Weight (net/gross)	0.8 kg (1.76 lb)/1.67 kg (3.68 lb)
Certifications	CE
EOS Support	Win 10, WE8S, Linux

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.


Packing List

- 1 x Screw pack
- 4 x Pre-installed foot pad

Power Protection

AC Version

- OVP (over voltage protection)
- OCP (over current protection)
- SCP (short circuit protection)
- Reverse protection

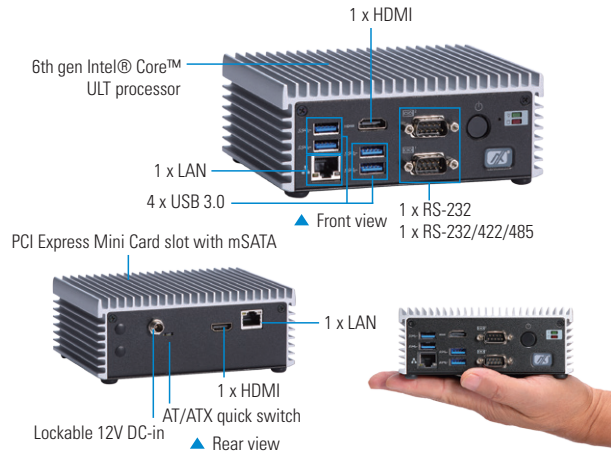

Ordering Information


Standard	
eBOX560-500-FL-DC-6600U (P/N: E36K560143)	Fanless embedded system with Intel® Core™ i7-6600U processor, 2 HDMI, 2 GbE LAN, 4 USB 3.0, 2 COM and PCI Express Mini Card (w/o adapter & power cord)
eBOX560-500-FL-DC-6300U (P/N: E36K560144)	Fanless embedded system with Intel® Core™ i5-6300U processor, 2 HDMI, 2 GbE LAN, 4 USB 3.0, 2 COM and PCI Express Mini Card (w/o adapter & power cord)
eBOX560-500-FL-DC-6100U (P/N: E36K560145)	Fanless embedded system with Intel® Core™ i3-6100U processor, 2 HDMI, 2 GbE LAN, 4 USB 3.0, 2 COM and PCI Express Mini Card (w/o adapter & power cord)
eBOX560-500-FL-DC-3955U (P/N: E36K560142)	Fanless embedded system with Intel® Celeron® 3955U processor, 2 HDMI, 2 GbE LAN, 4 USB 3.0, 2 COM and PCI Express Mini Card (w/o adapter & power cord)

Optional

2.5" SATA HDD	64GB or above
2.5" SATA SSD	100GB or above
DDR4 SO-DIMM	2GB to 16GB
8816K560IAOE	Wall mount kit
8816K560AAOE	VESA arm kit
8816K560BAOE	DIN-rail kit
	Wi-Fi module
50966124050E	12V 60W power adapter
	Power cord

* Specifications and certifications may vary based on different requirements.

Dimensions

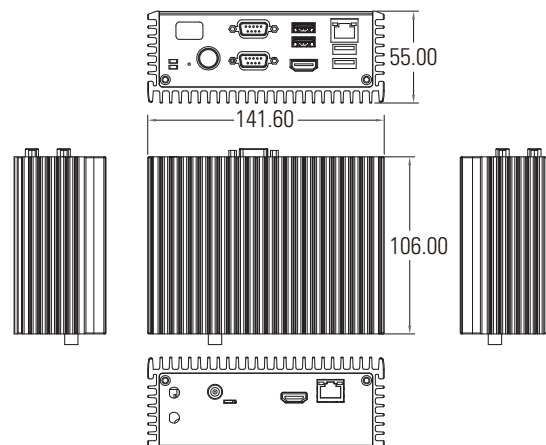

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)