

eBOX620-841-FL

Fanless Embedded System with Intel® Atom® Processor E3845 1.91 GHz, HDMI, VGA, 2 GbE LANs, 4 USB and 4 COM

Features

- Intel® Atom® E3845 1.91 GHz quad-core SoC
- 204-pin DDR3L-1066/1333 SO-DIMM, up to 8GB
- Fanless operation design with full feature I/O
- 2 RS-232/422/485 and 2 RS-232 ports
- One 2.5" 9.5 mm SATA drive bay, 1 CFast™ slot and mSATA
- Supports 8 channel programmable DI/DO and 2 PCI Express Mini Card slots
- Supports VGA and HDMI dual display




Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Atom® processor E3845 1.91 GHz quad-core
System Memory	1 x 204-pin DDR3L-1066/1333 SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
System I/O Outlet	2 x RS-232/422/485 (COM1/2) 2 x RS-232 (COM3/4) 1 x VGA 1 x HDMI 1 x Audio (Mic-in/Line-out) 2 x 10/100/1000 Mbps Ethernet (Intel® i210IT) 4 x USB 2.0 3 x SMA type connector opening for antenna 1 x VDC 12V power input connector 1 x ATX power switch 8 channel programmable DI/DO
Watchdog Timer	255 levels, 1 to 255 sec.
Storage	1 x 2.5" 9.5 mm SATA HDD drive bay 1 x CFast™ 1 x mSATA
Expansion Interface	1 x full-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x half-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x SIM slot
TPM	TPM 1.2 supported
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	Input AC 90-264V, AC 60W adapter with lock Output: DC 12V @ 5A
Operating Temperature	-40°C to +60°C (-40°F ~ +140°F)
Humidity	10% - 90% , non-condensing
Vibration Endurance	3 Grms with CFast™ (5-500Hz, X, Y, Z directions)
Dimensions	200 mm (7.87") (W) x 12 mm (4.72") (D) x 56 mm (2.2") (H)
Weight (net/gross)	2 kg (4.41 lb)/ 2.7 kg (5.95 lb)
Certificate	CE
EOS Support	WE8S, WE57

Packing List

- 1 x Quick manual
- 1 x Driver cd
- 1 x Screw pack
- 2 x CFast™ Mylar
- 1 x HDD Mylar
- 4 x Foot pad

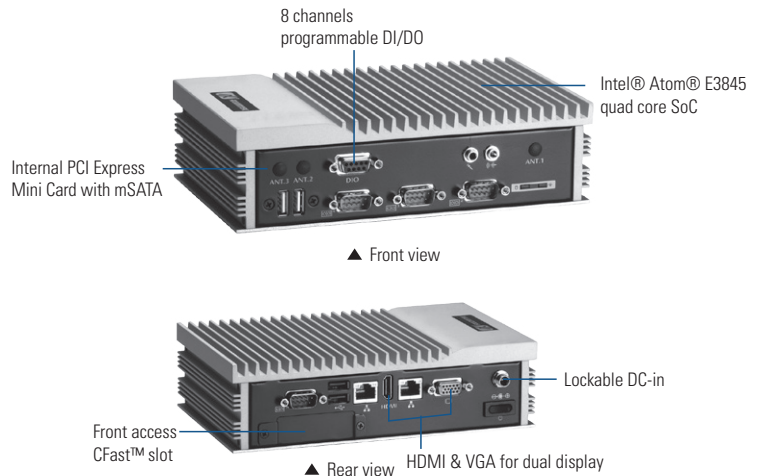

Power Protection

AC Version

- OVP (over voltage protection)
- OCV (over current protection)
- SCP (short circuit protection)

Ordering Information

Standard


eBOX620-841-FL	Fanless embedded system with Intel® Atom® E3845 1.91 GHz, VGA, HDMI, 2 GbE LAN, 4 USB and 4 COM
----------------	---

Optional

2.5" SATA HDD	40GB or above
2.5" SATA SSD	4GB or above
DDR3L SO-DIMM	1GB - 8GB
CFast™	512MB or above
Wall mount kit	8816K6271A0E
VESA arm kit	8816K6272A0E
DIN-rail kit	8816K6273A0E
Wi-Fi module	
12V/60W Adapter	50966124050E
Power cord	

*Specifications and certifications may vary according to various options.

Dimensions

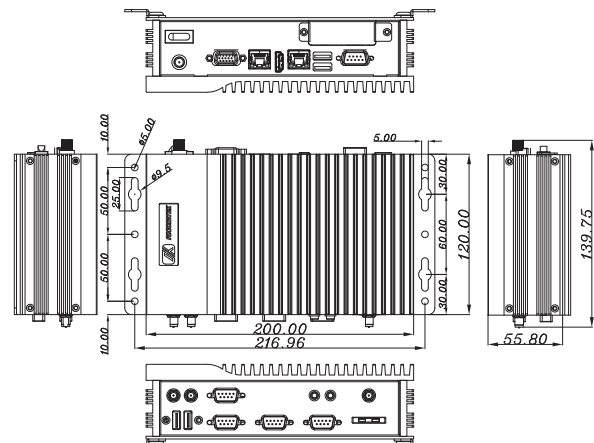

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)
[T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-](#)
[100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#)
[MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#)
[MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#)