

# eBOX640-500-FL

Fanless Embedded System with LGA1151 Socket 7th/6th Gen Intel® Core™ & Celeron® Processor, Intel® H110, HDMI, DisplayPort, VGA, 6 USB, 4 COM, PCI Express Mini Card Slot and 10 to 30 VDC

## Features

- LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor (Kaby Lake/Skylake)
- Supports 4 COM, 6 USB and 2 GbE LAN
- Two 2.5" SATA drive bay
- PCI Express Mini Card slot and SIM slot
- Front I/O connectivity design
- 10 to 30 VDC wide range power input




## Specifications

Standard Color	Silver-black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor (CPU TDP max. up to 35W)
System Memory	2 x 288-pin DDR4-2133 DIMM, up to 32GB
Chipset	Intel® H110
BIOS	AMI
System I/O Outlet	1 x RS-232/422/485 3 x RS-232 2 x 10/100/1000Mbps Ethernet (Intel® i219-LM, i211-AT) 2 x USB 2.0 4 x USB 3.0 1 x Audio (Mic-in/Line-out) 1 x DisplayPort 1 x HDMI 1 x VGA 1 x Phoenix type VDC power input connector 1 x AT/ATX quick switch 2 x SMA-type antenna connector 1 x ATX power switch
Watchdog Timer	255 levels, 1 to 255 sec.
Storage	2 x 2.5" SATA HDD drive bay (max. up to 15 mm height) 1 x mSATA (enabled in BIOS setting)
Expansion Interface	1x Full-size PCI Express Mini Card slot with mSATA supported (PCI Express + USB signal) 1 x SIM slot
TPM	N/A
System Indicator	1 x Green for system power 1 x Orange LED for HDD active
Power Input	10 to 30 VDC
Operating Temperature	-10°C to +55°C (+14°F to +131°F) (with W.T. DRAM/SSD for Skylake) -10°C to +50°C (+14°F to +122°F) (with W.T. DRAM/SSD for Kaby Lake)
Humidity	10% - 90%, non-condensing
Vibration Endurance	2 Grms with SSD (5 to 500 Hz, X, Y, Z directions)
Dimensions	182 mm (7.16") (W) x 235.7mm (9.27") (D) x 82 mm (3.23") (H)
Weight (net/gross)	3 kg (6.61 lb)/3.6 kg (7.94 lb)
Certifications	CE
EOS Support	Win 10 IoT, WE8S Linux

\* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

## Packing List

- 1 x Screw pack
- 4 x Pre-installed foot pad
- 1 x 3-pin terminal block connector

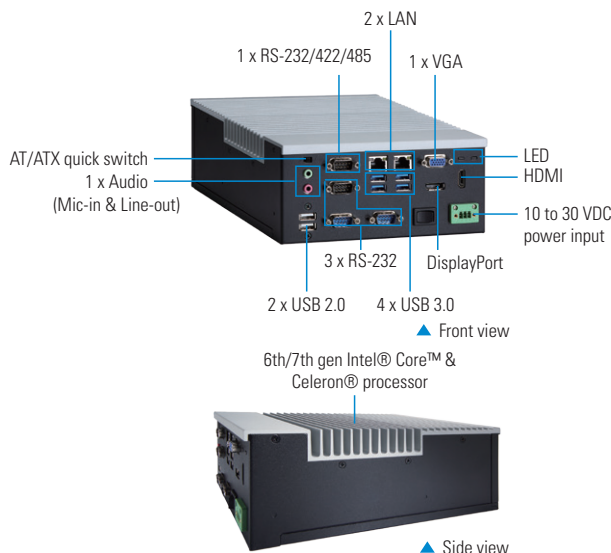

## Power Protection

### DC Version

OCV (over current protection)  
UVP (under voltage protection)

## Ordering Information

### Standard


eBOX640-500-FL-DC (P/N: E36K640100)	Fanless embedded system with LGA1151 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® H110, HDMI, DisplayPort, VGA, 4 USB 3.0, 4 COM, PCI Express Mini Card slot and 10 to 30 VDC
--	---

### Optional

2.5" SATA HDD	64GB or above
2.5" SATA SSD	100GB or above
DDR4 RAM	2GB to 16GB
mSATA	64MB or above
8816K6400A0E	Wall mount kit
8816K6401A0E	DIN-rail kit
	3G/LTE module
50906D24000E	24V 120W power adapter
	Power cord

\* Specifications and certifications may vary based on different requirements.

## Dimensions

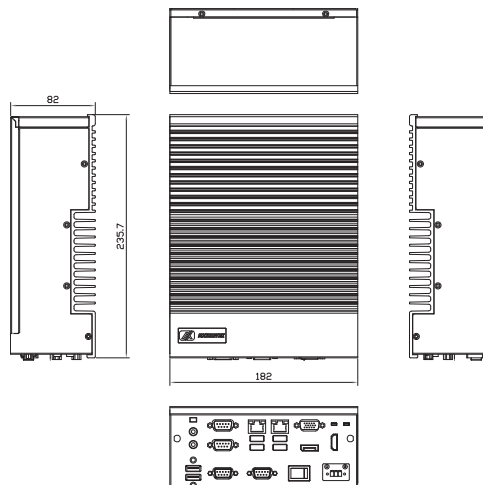

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Embedded Box Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)  
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)  
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)  
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)  
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)  
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)  
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)  
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)