


# eBOX660-872-FL

Fanless Embedded System with Socket G2 3rd Gen Intel® Core™ i7/i5/i3 & Celeron® Processor and 4 GbE LANs

## Features

- Socket G2 3rd gen Intel® Core™ i7/i5/i3 & Celeron® processor
- Intel® HM76 chipset
- 204-pin DDR3-1333/1600 SO-DIMM, up to 16GB
- One 2.5" 9.5 mm SATA drive bay, 1 CFast™ slot and 1 mSATA
- 2 internal PCI Express Mini Card slots
- VGA and DisplayPort with dual-view supported
- Jumbo Frame (9.5k), WoL, PXE Remote Boot supported

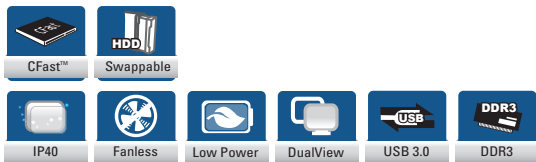


## Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Socket G2 (rPGB 988B) for 3rd generation Intel® Core™ i7/i5/i3 & Celeron® processor, TDP under 45 W
System Memory	2 x 204-pin DDR3-1333/1600MHz SO-DIMM, up to 16GB
Chipset	Intel® HM76
BIOS	AMI UEFI BIOS with OA 3.0 built
System I/O Outlet	4 x RS-232/422/485 1 x VGA 1 x DisplayPort 1 x audio (Mic-in/Line-out) 4 x 10/100/1000 Mbps Ethernet (Intel® i210-IT) 4 x USB 3.0 8 Isolated DI/DO (4 IN & 4 OUT) 2 x SMA type connector opening for antenna 1 x 10-35 VDC power input connector 1 x ATX power switch
Watchdog Timer	255 levels, 1~255 sec.
Storage	1 x 2.5" 9.5 mm SATA HDD drive bay 1 x CFast™ slot 1 x mSATA
Expansion Interface	2 x PCI Express Mini Card slots (USB + PCI Express signal) 2 x SIM slots
TPM	N/A
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active 4 x green LED for LAN link status
Power Supply	10-30 VDC
Operating Temperature	-40°C ~ +70°C (-40°F ~ 158°F) (with W.T. SSD, CPU TDP 35 W) -40°C ~ +60°C (-40°F ~ 140°F) (with W.T. SSD, CPU TDP 45 W)
Humidity	10% ~ 90% , non-condensing
Vibration Endurance	3 Grms with CFast™ (5-500Hz, X, Y, Z directions)
Dimensions	280 mm (11.02") (W) x 190 mm (7.48") (D) x 76 mm (2.99") (H)
Weight (net/gross)	3.8 kg (8.37 lb)/ 4.6 kg (10.14 lb)
Certificate	CE
EOS Support	WEBS, WES7, Linux

## Packing List

- 1 x Quick manual
- 1 x Driver CD
- 1 x Screw pack
- 4 x Foot pad
- 1 x DC-in connector

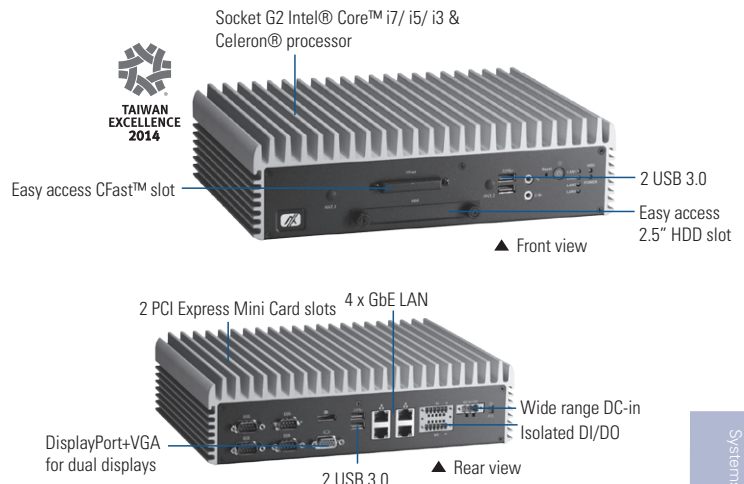

## Power Protection

### DC Version

- OVP (over voltage protection)
- UVP (under voltage protection)
- OC (over current protection)
- OTP (over temperature protection)
- Reverse protection

## Ordering Information

### Standard


eBOX660-872-FL-i7-3610QE-DC	Fanless embedded system with socket G2 Intel® Core™ i7-3610QE processor, VGA, DisplayPort, 4 GbE LANs, 4 USB 3.0, 4 COM ports and 10-30 VDC
eBOX660-872-FL-i5-3610ME-DC	Fanless embedded system with socket G2 Intel® Core™ i5-3610ME processor, VGA, DisplayPort, 4 GbE LANs, 4 USB 3.0, 4 COM ports and 10-30 VDC

### Optional

2.5" SATA HDD	40 GB or above
DDR3 SO-DIMM	1 GB ~ 16 GB
CFast™	512 MB or above
Wi-Fi module	
3G module	
GPS module	
Wall mount kit	8816K635010E
DIN-rail kit	8816K671030E
24 V 120 W Adapter	50966D45000E

\*Specifications and certifications may vary according to various options.

## Dimensions

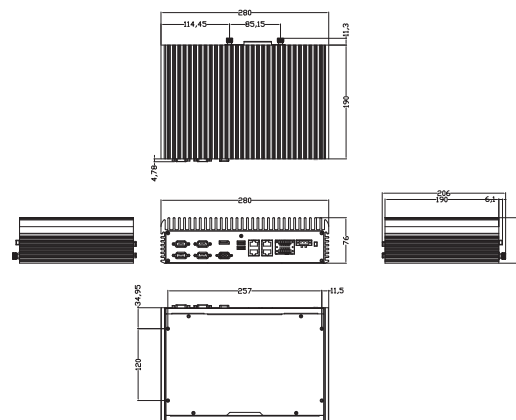

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Embedded Box Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)  
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)  
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)  
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)  
[T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-](#)  
[S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#) [MIC-720AI-00A1](#) [UNO-247-](#)  
[J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-](#)  
[I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#) [BKCM8i7CB8N](#)