


ICO300

Robust DIN-rail Fanless Embedded System with Intel® Atom® Processor E3815/E3827, 4 COM, 2 LANs, DIO and RTC

Features

- Cost-effective with fanless and cableless design
- Intel® Atom® processor E3815 or E3827
- 4 RS-232/422/485 ports
- 2 isolated 10/100/1000 Mbps Ethernet ports
- 1 DIO port
- 1 PCI Express Mini Card slot (3G/GPRS or Wi-Fi)
- 1 CompactFlash (or mSATA) and SATA SSD (or HDD)
- 12 to 24 VDC wide range power input
- Supports Windows® 10 IoT solution

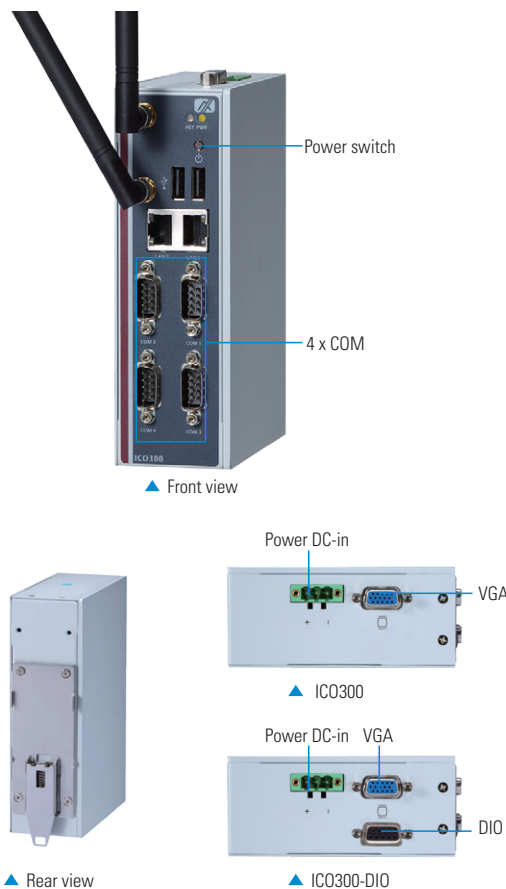

Specifications

Standard Color	Silver	
Construction	Extruded aluminum and heavy-duty steel, IP40	
CPU	Intel® Atom® processor E3815 (1.46 GHz) or E3827 (1.75 GHz)	
System Board	SBC87842	
System Memory	1 x DDR3L-1333/1600 SO-DIMM, up to 8GB	
BIOS	AMI UEFI BIOS	
System I/O Outlet	Serial	4 x RS-232/422/485 (COM 1 to 4) Interface select by BIOS Supports Auto Flow Control in RS-485 mode
	RTC	Battery onboard
	USB	2 x USB 2.0
	Storage	1 x CompactFlash™ (or mSATA*) 1 x SATA SSD (or HDD)
	LAN	2 x 10/100/1000 Mbps Ethernet (Intel® i211-AT for ICO300) (Intel® i210-IT for ICO300-WT)
	Display	1 x VGA
	DIO (ICO300-DIO)	1 x DI/DO (8-bit programmable, DB9 female connector) Voltage is 5V TTL-level ESD protection corresponds to IEC6100-4-2 (± 8kV (Air); ± 4kV (contact)) Programming: I/O sink current is 10mA (max.) Input/output can be programming
	Power Input	1 x DC power input with terminal block
	Wireless	1 x Full-size PCI Express Mini Card slot 1 x SIM Card socket 2 x Antenna

Watchdog Timer	255 levels, 1 to 255 sec.
System Indicator	Power, active
Power Supply	Power input range: 12 to 24 VDC Power input rating: 12 to 24 VDC, 1.21 to 0.66A (ICO300-E3815) 12 to 24 VDC, 1.42 to 0.74A (ICO300-E3827) Power protection: DC version, OVP, Reverse protection
Operating Temperature	-20°C to +70°C (-4°F to +158°F)
Humidity	10% to 95%
Vibration Endurance	2 Gms (5 to 500Hz, amplitude 0.35 mm; operation/storage/transport)
Weight (net/gross)	1.0 kg (2.2 lb)/1.50 kg (3.3 lb)
Certifications	CE, FCC, UL
Dimensions	48 mm (1.88") (W) x 110 mm (4.33") (D) x 155 mm (6.1") (H)
EOS Support	Windows® 7 embedded Windows® 8 embedded Linux support package Windows® 10 IoT core pro

* mSATA and wireless can be either one.

** mSATA and CF can be either one.


Ordering Information

Standard	
IC0300-E3815-PB-DC (P/N: E22C300109)	Robust DIN-rail fanless embedded system with Intel® Atom® processor E3815 1.46 GHz and 4 COM (-20°C to +70°C)
IC0300-E3827-PB-DC (P/N: E22C300110)	Robust DIN-rail fanless embedded system with Intel® Atom® processor E3827 1.75 GHz and 4 COM (-20°C to +70°C)
IC0300-E3815-DIO-PB-DC (P/N: E22C300111)	Robust DIN-rail fanless embedded system with Intel® Atom® processor E3815 1.46 GHz, 4 COM and DIO (-20°C to +70°C)
IC0300-E3827-DIO-PB-DC (P/N: E22C300112)	Robust DIN-rail fanless embedded system with Intel® Atom® processor E3827 1.75 GHz, 4 COM and DIO (-20°C to +70°C)

Optional	
CompactFlash™	4GB or above (with W.T. CF)
2.5" SATA SSD or HDD (with W.T. SSD or HDD)	
DDR3L SO-DIMM	2GB to 8GB (with W.T. memory)
8812C3000A0E	IC0300/310/320 wall mount bracket kit
8816N3234A0E	3G/GPS UC20G kit for tBOX (3G ANT) (E)
8816N3235A0E	3G/GPS UC20G kit for tBOX (3G/GPS ANT) (E)
8812C3003A0E	SparkLAN WPEA-152GN Wi-Fi kit ICO SFP (E)
8812C3004A0E	SparkLAN WPEA-251N Wi-Fi kit ICO SFP (E)
82606200390E	LTE module SIERRA MC7304 kit for EU SFP
822C3001070E	LTE SIM7100C with EXT ANT for IC0300 SFP
826N3230060E	tBOX series Bointec CPE902A Wi-Fi SFP

* Specifications and certifications may vary based on different requirements.

Dimensions

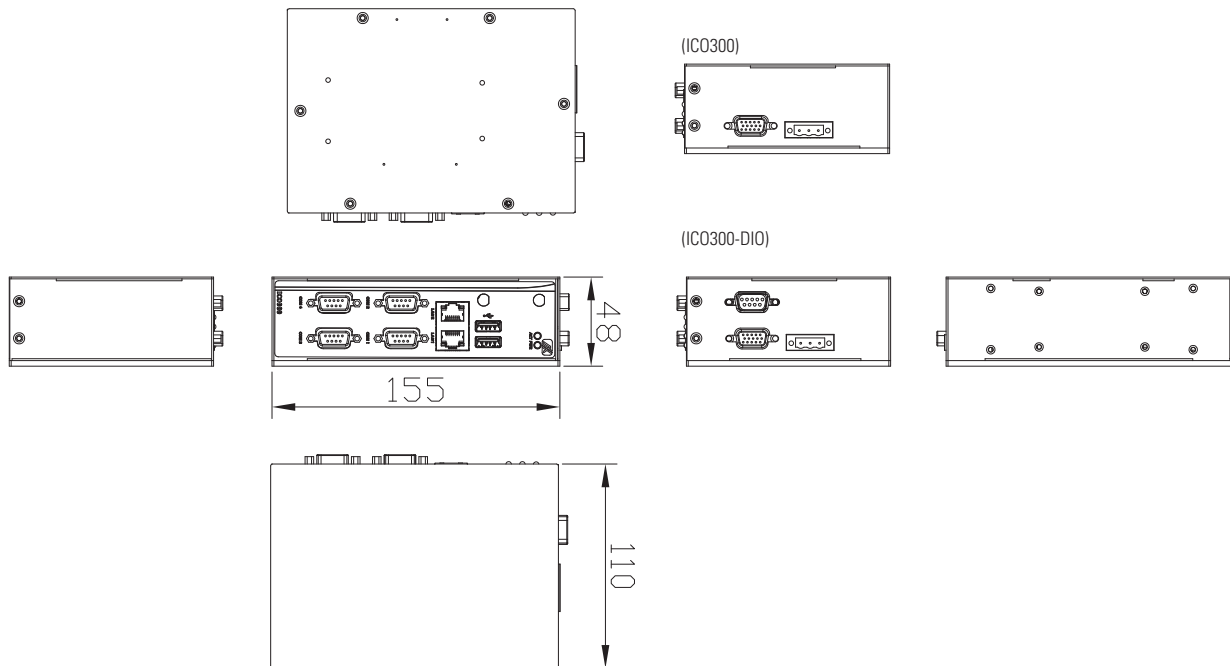

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)