
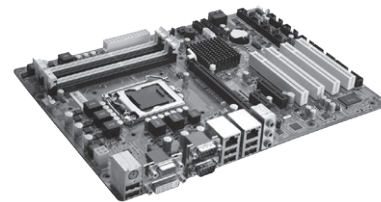


IMB204

ATX Industrial Motherboard with LGA1155 Socket Intel® Core™ Processor, Intel® B75, SATA3.0, Dual LANs, DVI-D/VGA and LPT

Features

- LGA1155 socket 3rd gen Intel® Core™ i7/i5/i3 & Celeron® processor
- 4 DDR3-1333/1600 DIMM, up to 32GB
- VGA and DVI-D with dual-view supported
- PCIe Gen. 3 supported
- 1 SATA-600 and 5 SATA-300
- 12 USB 2.0 ports
- TPM 1.0 header support

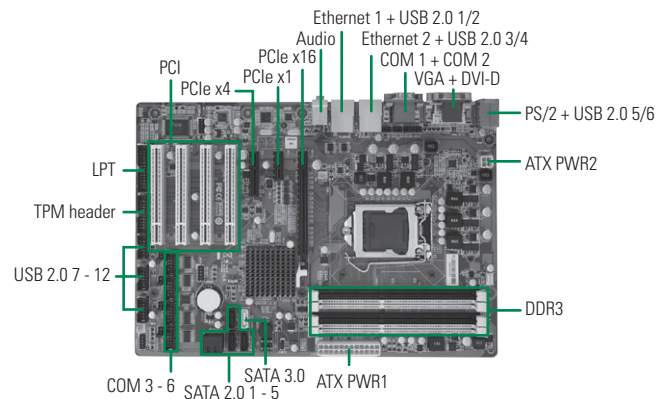

▲ Side view



Core System

CPU	LGA1155 socket Intel® Core™ i7/i5/i3 & Celeron® processor
System Memory	4 x 240-pin DDR3-1333/1600 DIMM, up to 32GB
Chipset	Intel® B75
BIOS	AMI
SSD	N/1
Watchdog Timer	255 levels
Expansion Interface	1 x PCIe x16 Gen. 3 1 x PCIe x4 Gen. 2 1 x PCIe x1 Gen. 2 4 x PCI
Battery	Lithium 3 V/ 220 mAH
Power Requirements	Intel® Core™ i5-2320 3.0 GHz 2GB x 4 DDR3-1333, +12V @ 7.06A, +5V @ 10.21A, +5VSB @ 0.02A, +3.3V @ 1.25A
Size	305 x 244 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x PS/2 keyboard & mouse 5 x RS-232 (COM 2/3/4/5/6) 1 x RS-232/422/485 (COM 1) 1 x LPT 1 x TPM header
SATA	1 x SATA-600 & 5 x SATA-300
Hardware Monitoring	Detect CPU/system temperature, voltage and support Smart fan control
Ethernet	1st port as 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM, iAMT with Intel® 82574LM 2nd port as 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® 82579V
Audio	HD Codec audio as MIC-in/Line-in/Line-out with Realtek ALC892
USB	12 x USB 2.0
TPM	Support TPM1.0 header
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels (4-IN & 4-OUT)

Display

Chipset	Intel® HD 4000/2500 graphics
Memory Size	Max. 1.7GB
Display Interface	1 x VGA 1 x DVI-D

Packing List

Standard	User's manual/utility CD cable, I/O bracket
-----------------	---

Ordering Information

Standard	
IMB204 (P/N: E38F204101)	ATX industrial motherboard with LGA1155 socket Intel® Core™ i7/i5/i3 & Celeron® processor, 2 GbE LANs, DVI-D/VGA, 6 COM and LPT
Optional	
59460642100E	COM port cable, 5 x 2P, P=2.54 mm, L=300 mm
593F2040300E	LPT cable, w/ bracket, P=2.54 mm, L=300 mm
594F2112100E	COM port DB9 to 5 x 2P, P=2.54 mm, L=300 mm w/BK
594F2112110E	COM port x2 DB9 to 5 x 2P, P=2.54 mm, L=300 mm w/BK



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)