


IMB205

ATX Industrial Motherboard with LGA1156 Socket Intel® Core™ Processor, Intel® Q57, VGA/DisplayPort and Dual LANs

Features

- LGA1156 socket Intel® Core™ i7/i5/i3 & Pentium® processor
- 4 DDR3-1066/1333 DIMM, up to 16GB
- 6 SATA-300 with RAID 0/1/5/10
- Intel® AMT & TPM (optional) supported
- DisplayPort and VGA with dual-view supported

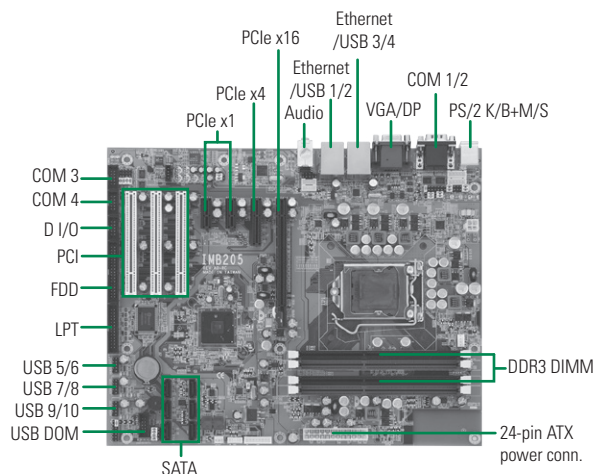


Core System

CPU	LGA1156 socket Intel® Core™ i7/i5/i3 & Pentium® processor
System Memory	4 x 240-pin DDR3-1066/1333 DIMM, up to 16GB
Chipset	Intel® Q57
BIOS	AMI UEFI BIOS
SSD	USB DOM
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCIe x16 1 x PCIe x4 (refer to user's manual for setting) 2 x PCIe x1 (refer to user's manual for setting) 3 x PCI
Battery	Lithium 3V/220 mAH
Power Requirements	Intel® Core™ i5-660 @3.33 GHz, 2GB DDR3 Max. RMS: +5V_SBY @ 0.43A, +3.3V @ 0.8A, +5V @ 0.966A, +12V @ 2.533A, -12V @ 0.033A
Size	305 x 244 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x FDD 1 x PS/2 keyboard & mouse 1 x LPT; with SPP/EPP/ECP supported 3 x RS-232 (COM 2/3/4); with +5V/+12V powered 1 x RS-232/422/485 (COM 1); with +5V/+12V powered
SATA	6 x SATA-300 with RAID 0/1/5/10
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	1st port as 10/100/1000Mbps supports iAMT, Wake-on-LAN, RPL/PXE Boot ROM with Intel® 82578DM 2nd port as 10/100/1000Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Intel® 82574L
Audio	HD Codec audio as MIC-in/ Line-out/Speaker-out
USB	12 x USB 2.0 ,4 ports on the rear I/O, 8 ports with pin-headers
TPM	Infineon SLB9635 for trusted platform (optional)
SMBus	System Management Bus for advanced monitoring/control interface
Digital I/O	8 channels (4-IN & 4-OUT)

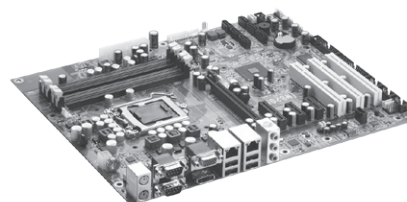

▲ Side view

Display

Chipset	Intel® HD graphics
Memory Size	Intel® DVM 5.0 compliant
Display Interface	1 x VGA 1 x DisplayPort

Packing List

Standard

Quick installation guide, user's manual/utility CD, cable

Cable

Part Number	Description	Qty
593826A0000E	SATA signal cable 500 mm	1
59380502000E	COM + printer cable w/ bracket	1

Ordering Information

Standard

IMB205VGGA (P/N: E38F205100)	ATX industrial motherboard with LGA1156 socket Intel® Core™ i7/i5/i3 & Pentium®, VGA/DisplayPort, 2 GbE LANs, 4 COM, audio, iAMT and RAID
IMB205VGGA TPM (P/N: E38F205101)	ATX industrial motherboard with LGA1156 socket Intel® Core™ i7/i5/i3 & Pentium®, VGA/DisplayPort, 2 GbE LANs, 4 COM, audio, iAMT, TPM and RAID

* Discrete graphic card is necessary for display if the chosen CPU doesn't have integrated graphics support.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)