
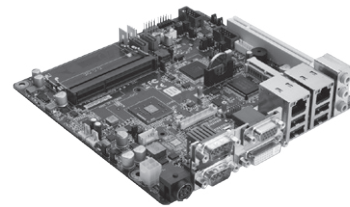


MANO831

Mini-ITX SBC with Intel® Atom™ Processor D2550, Intel® NM10, VGA/DVI-D/LVDS1/LVDS2, Dual LANs and HD Audio

Features

- Intel® Atom™ processor D2550 (1.86 GHz) onboard
- 2 DDR3-1066 SO-DIMM, up to 4GB
- DVI-D/VGA/LVDS1/LVDS2 with dual-view supported
- PCI and PCI Express Mini Card
- 2 SATA-300
- 7 USB 2.0 ports
- TPM 1.2 supported

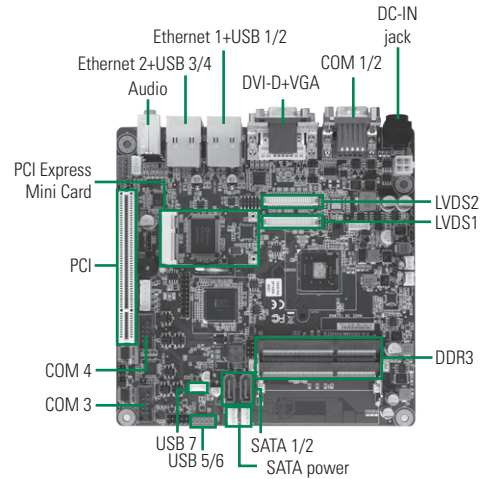

▲ Side view



Core System

CPU	Intel® Atom™ processor D2550 (1.86 GHz)
System Memory	2 x 204-pin DDR3-1066 SO-DIMM, up to 4GB
Chipset	Intel® NM10
BIOS	AMI 16Mb flash ROM
SSD	N/A
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI 1 x PCI Express Mini Card
Battery	Lithium 3V/220 mAh
Power Requirements	+12V @ 1.6A
Size	170 x 170 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	2 x RS-232 (COM 1-2) 2 x RS-232/422/485 (COM 3-4)
SATA	2 x SATA-300
Hardware Monitoring	Detect CPU/system temperature, voltage and support Smart fan control
Ethernet	2 x Realtek RTL8111E for Gigabit LAN
Audio	HD Codec audio as MIC-in/Line-in/Line-out speaker-out with Realtek ALC892
USB	7 x USB 2.0
SMBus	N/A
Digital I/O	8 Channels (4-IN & 4-OUT)
TPM	Infineon TPM 1.2 SLB9635

Display

Chipset	Intel® graphics media accelerator (GMA) 3650
Memory Size	Share memory
Display interface	1 x VGA 1 x DVI-D 1 x LVDS1 (single channel) 1 x LVDS2 (dual channel)

Packing List

User's manual/utility CD, cable

Ordering Information

Standard	
MANO831VGGA (P/N: E38M831100)	Mini-ITX SBC with Intel® Atom™ D2550, VGA/DVI-D/LVDS, 2 GbE LANs, 4 COM, 7 USB and HD audio
Optional	
59460642100E	COM port cable, 5 x 2P, P=2.54 mm, L=300 mm
594F2112100E	COM port DB9 to 5 x 2P P=2.54 mm, L=300 mm w/BK
594F2112110E	COM portx2 DB9 to 5 x 2P P=2.54 mm, L=300 mm w/BK



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-](#)
[S16M-IND](#)