

MANO873

Mini-ITX SBC with LGA1155 Socket 3rd Gen Intel® Core™ Processor, Intel® Q77, VGA/DVI-D, Dual LANs and USB 3.0

Features

- LGA1155 socket 3rd gen Intel® Core™ i7/i5/i3 & Celeron® processors
- 2 DDR3-1333/1600 SO-DIMM, up to 16GB
- PCIe x16 Gen3 supported
- 2 SATA-600 and 2 SATA-300 with RAID 0/1/5/10
- 4 USB 3.0
- Intel® AMT 8.0 supported
- TPM 1.2 supported
- mSATA supported





Core System

CPU	LGA1155 socket 3rd gen Intel® Core™ i7/i5/i3 & Celeron® processor
System Memory	2 x 204-pin DDR3-1333/1600 SO-DIMM dual channel, up to 16GB
Chipset	Intel® Q77
BIOS	AMI UEFI BIOS with OA 3.0 built
SSD	N/A
Watchdog Timer	255 level, 1 ~ 255 sec
Expansion Interface	1 x PCIe x16 Gen3 1 x PCI Express Mini Card slot (shared mSATA)
Battery	Lithium 3V/220 mAh
Power Requirements	i7-2700K: +5V @ 1.8A, +12V @ 6.1A, +5VSB @ 0.3A, +3.3V @ 0.9A
Size	170 x 170 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (+32°F ~ +140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x RS-232/422/485 (COM 1); with 5V/12V power 1 x RS-232 (COM 2) 1 x PS/2 keyboard & mouse
SATA	2 x SATA-300; 1 SATA-300 supports SATA DOM 2 x SATA-600, support RAID 0/1/5/10
Hardware Monitoring	Detect CPU/System temperature, voltage and fan speed
Ethernet	1st port as 10/100/1000 Mbps support WOL, PXE with Intel® 82579LM/V (LAN 1) 2nd port as 10/100/1000 Mbps support WOL, PXE with Intel® 82583V (LAN 2)
Audio	HD Audio as Mic-in/Line-out with Realtek ALC662
USB	4 x USB 3.0 (2 USB 3.0 from Intel® Q77; 2 USB 3.0 from Renesas uPD720202 with WinXP driver) 4 x USB 2.0
TPM	Infineon TPM1.2 SLB9635
Digital I/O	8 channels (4-in & 4-out)
SM BUS	N/A

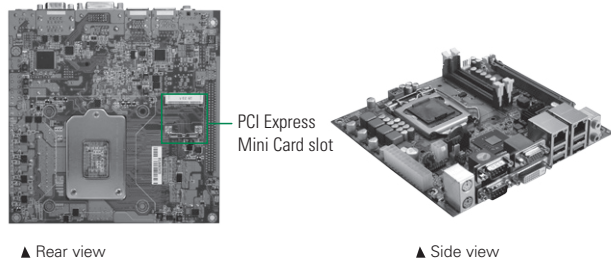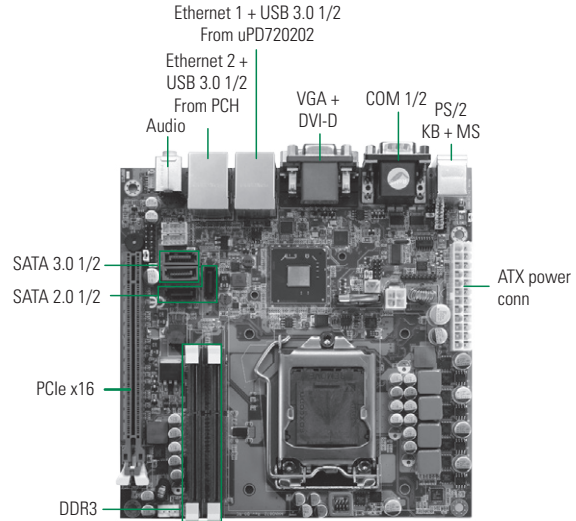

Display

Chipset	Intel® HD 2000/3000/4000 graphics
Memory Size	Shared memory
Display Interface	1 x VGA 1 x DVI-D

Packing List

Standard	User's manual/utility CD, cable, I/O bracket
-----------------	--

Ordering Information

Standard	MANO873VGGA (P/N: E38M873101)	Mini ITX SBC with LGA1155 socket 3rd gen Intel® Core™ i7/i5/i3 & Celeron®, VGA/DVI-D, 2 GbE LANs and USB 3.0
Optional	5077L07C000E	LGA115x 1U fan back plate H:2.45 mm
	50721127100E	LGA115x 1.5U fan JAC6L23C-C H=35



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)