


MANO881

Mini-ITX SBC with LGA1150 Socket 4th Gen Intel® Core™ Processor, Intel® H81, HDMI/VGA/LVDS, Dual LANs and USB 3.0

Features

- LGA1150 socket 4th gen Intel® Core™ i7/i5/i3 & Celeron® processors (Haswell/Haswell Refresh)
- 2 DDR3-1333/1600 SO-DIMM, up to 16GB
- PCIe x16 Gen2 supported
- 2 SATA-600, 2 SATA-300 and 1 mSATA
- 2 USB 3.0 and 8 USB 2.0
- HDMI/VGA/LVDS with dual-view supported

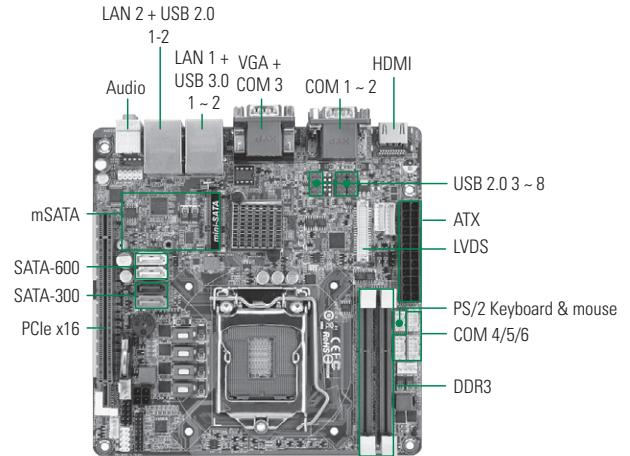

Core System

CPU	LGA1150 socket 4th gen Intel® Core™ i7/i5/i3 & Celeron® processor (Haswell/Haswell Refresh)
System Memory	2 x 204-pin DDR3-1333/1600 SO-DIMM dual channel, up to 16GB
Chipset	Intel® H81
BIOS	AMI
SSD	N/A
Watchdog Timer	255 level, 1 ~ 255 sec
Expansion Interface	1 x PCIe x16 Gen2 1 x mSATA
Battery	Lithium 3V/220 mAh
Power Requirements	i7-4770S 3.1 GHz 4GB x 1 DDR3-1333, +12V @ 5.2A, -12V @ 0.1A, +5V @ 2.2A, +5VSB @ 0.2A, +3.3V @ 0.9A
Size/Weight	170 x 170 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (+32°F ~ +140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x PS/2 keyboard & mouse 3 x RS-232/422/485 (COM 1 ~ 3) 3 x RS-232 (COM 4 ~ 6) COM 1 ~ 6 with 5V/12V power select
SATA	2 x SATA-300 2 x SATA-600
Hardware Monitoring	Detect CPU/System temperature, voltage and fan speed
Ethernet	1st port as 10/100/1000 Mbps supports WOL, PXE with Intel® i210AT (LAN 1) 2nd port as 10/100/1000 Mbps supports WOL, PXE with Intel® i217V (LAN 2)
Audio	HD Audio as Mic-in/Line-out with Realtek ALC662
USB	2 x USB 3.0 8 x USB 2.0
TPM	N/A
Digital I/O	8 channels programmable
SM BUS	N/A

Display

Chipset	Intel® HD 4000/5000 series graphics
Memory Size	Shared memory
Display Interface	1 x HDMI 1 x VGA 1 x LVDS

Packing List

Standard	I/O Bracket, Driver CD
-----------------	------------------------

Ordering Information

Standard	MANO881VGGA (P/N: E38M881101)	Mini-ITX SBC with LGA1150 socket 4th gen Intel® Core™ i7/i5/i3 & Celeron®, USB 3.0, SATA 3.0, 2 GbE LANs, HDMI/VGA/LVDS and mSATA
-----------------	-------------------------------	---

Optional	593826A0000E	SATA signal cable, L=500 mm
	593M8810300E	COM port cable, P=2.0, L=300 mm
	593M8810400E	USB cable with bracket, p=2.54 mm, L=200 mm
	593M8400400E	Audio cable with bracket, p=2.54 mm, L=300 mm
	5077L07C000E	LGA115x 1U fan back plate H:2.45 mm
	50721127100E	LGA115x 1.5U fan JAC6L23C-C H=35



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [MICROSOM](#)
[I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX](#) [BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-OLINUXINO-](#)
[EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-SOM-WIFI-](#)
[4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-A10-08128](#)
[MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)
[E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-OLINUXINO-MICRO-](#)
[E8GS16M-IND](#)