


# MVS900-511-FL

Fanless Vision System with LGA1151 Socket 7th/6th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® H110, Vision I/O, 4-CH PoE and 4-CH LED Output

## Features

- Integrated real-time vision I/O
  - 4-CH trigger input
  - 4-CH trigger output
  - 4-CH LED lighting control
  - 2-CH quadrature encoder input
  - 16-CH isolated DIO
- Supports camera interfaces
  - 4 IEEE802.3at GbE LAN ports (PoE)
- Power input: 24 VDC (uMin=19V/uMax=30V)
- -10°C to +60°C operating temperature range with W.T. SSD
- Supports 2 swappable 2.5" HDD
- Supports TPM 2.0 function

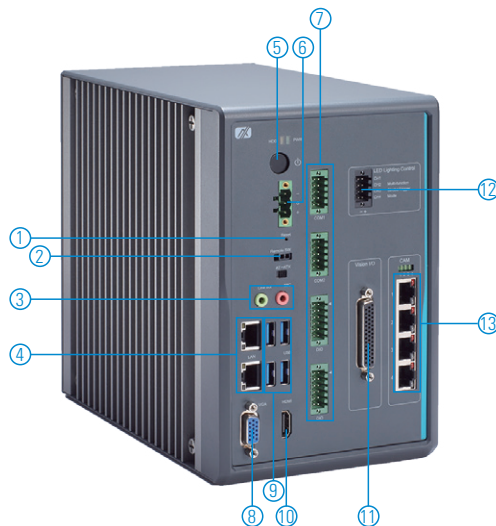

- |                      |   |  |
|----------------------|---|--|
| 1. Reset switch      | 7. 2 x RS-232/422/485                                   | 11. Vision I/O: 4-in/4-out trigger I/O,<br>8-in/8-out DIO, 2 x encoder |
| 2. Remote switch     | 1 x 8-in/8-out DIO with isolated<br>1.5 kVDC protection | 12. LED lighting control: trigger and<br>strobe mode                   |
| 3. Mic-in & Line-out | 8. VGA  | 13. 4 x IEEE802.3at GbE LAN port                                       |
| 4. 2 x LAN           | 9. 4 x USB 3.0  |  |
| 5. Power switch      | 10. HDMI  |  |
| 6. Terminal block    |   |  |



## Specifications

Standard Color	Black
Construction	Aluminum die-casting and heavy-duty, IP40
Processor System	CPU Level 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processors, up to 65W (Kaby Lake/Skylake)
	Chipset Intel® H110
System Memory	2 x DDR4-2133/2400 un-buffered SO-DIMM, up to 32GB
System I/O	1 x Switch for power On/Off (ATX) 1 x Remote switch 1 x Reset switch 1 x 3-pin terminal block 1 x AT/ATX selectable switch 2 x 10/100/1000 Mbps Ethernet (Intel® i211-AT) 2 x RS-232/422/485 & 1 x 8-in/8-out DIO with isolated 1.5 kVDC protection 4 x USB 3.0 1 x HDMI 1 x VGA 1 x Mic-in 1 x Line-out
TPM	TPM 2.0
Vision I/O	- 4-CH trigger input (response time<1us, sink type, input range: 0 to 30V) - 4-CH trigger output (response time<1us, sink type, open collector, output range: 0 to 30V, 100mA max./CH) - 4-CH LED lighting control (strobe mode: 24V, 1A per CH/trigger mode: 24V, 0.5A per CH) - 2-CH quadrature encoder input (A/B/Z) - 8-CH isolated DI (sink/source type, input range: 0 to 30V) - 8-CH isolated DO (sink type, open collector, supply voltage: 5-30V, 200mA max./CH) - Programmable interrupt functions

Camera Interface	4 x IEEE802.3at GbE LAN port (PoE, Intel® i210-AT, IEEE802.3at compliant, total max. power output 30W)
Expansion Interface	1 x Full-size PCI Express Mini Card slot with USB signal 1 x Internal USB connector
Storage	2 x 2.5" swappable HDD (9.5 mm height)
System Indicators	1 x Power LED 1 x HDD LED 4 x PoE power LED
Power Input	Type: ATX/AT Input: 24 VDC (uMin=19V/uMax=30V)
Operating Temperature	-10°C to +60°C (+14°F to +140°F) with 6th gen Intel® Core™ up to 35W and W.T. HDD/SSD* -10°C to +50°C (+14°F to +112°F) with 6th/7th gen Intel® Core™ up to 65W and W.T. HDD/SSD*
Storage Temperature	-20°C to +80°C (-4°F to +176°F)
Humidity	10% to 90%, non-condensing
Dimensions	135 mm (5.31") (W) x 208 mm (8.19") (H) x 230 mm (9.06") (D)
Weight (net/gross)	5 kg (11.02lb)/5.9 kg (13 lb)
Certifications	CE, FCC
Software Support	AMS.AXView

\* CPU support list please refer to the user's manual

## Ordering Information

### System

MVS900-511-FL (P/N: E27L900100)	Fanless vision system with LGA1151 socket 7th/6th gen Intel® Core™ i7/i5/i3 & Celeron® processor, Intel® H110, vision I/O, 4-CH PoE and 4-CH LED output
------------------------------------	---

### Optional Accessory

2.5" SATA HDD/SSD	
DDR4-2133/2400 un-buffered SO-DIMM, up to 32GB	
8817L900010E	MVS900-511 usb dongle kit
8817L900020E	MVS900_BK_Din_Kit
8817L900030E	MVS900_Wall-Mount_Kit
5A244AP1200E	44-pin DIN-rail terminal board DM44-AP12
594DM443500E	44-pin D-SUB cable, L=1m WHDM44/1.0-6954
594DM443510E	44-pin D-SUB cable, L=2m WHDM44/2.0-6954
594DM443520E	44-pin D-SUB cable, L=3m WHDM44/3.0-6954

\* Specifications and certifications may vary based on different requirements.

## Power Protection


### DC Version

OVP (over voltage protection)
SCP (short circuit protection)
OCP (over current protection)

## Packing List

- 1 x MVS900-511-FL
- 1 x Screw pack
- 4 x Foot pad
- 1 x CPU grease
- 1 x Terminal block
- 1 x Remote power switch cable

## Dimensions

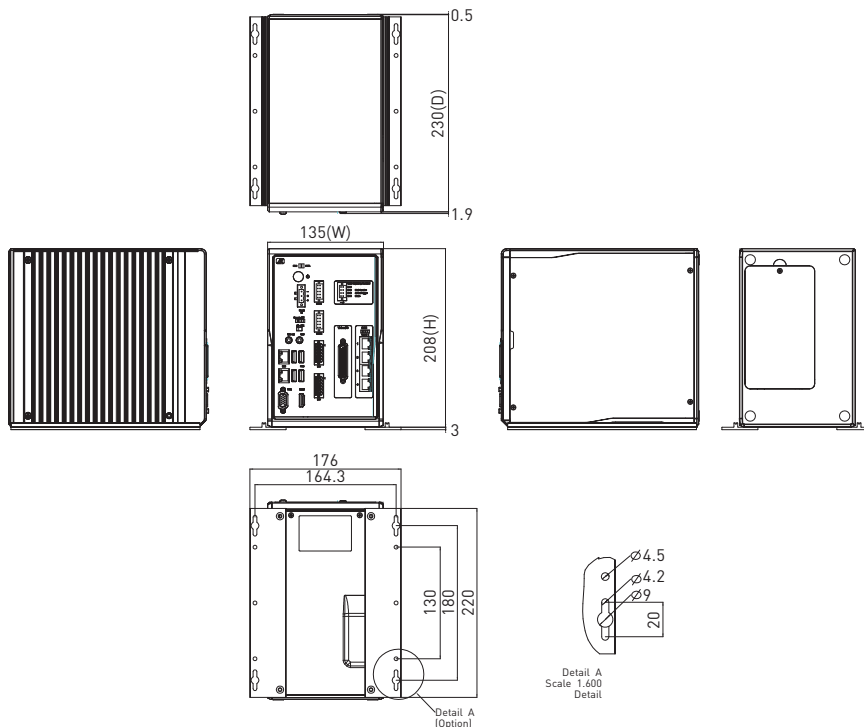

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Embedded Box Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)  
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)  
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)  
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)  
[T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-](#)  
[100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#)  
[MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#)  
[MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#)