
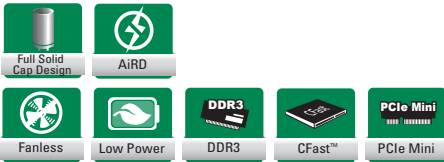


# NANO831

Nano-ITX SBC with Intel® Atom™ N2600, Intel® NM10, LVDS/VGA, Dual LANs and Audio

## Features

- Intel® Atom™ processor N2600 (1.6 GHz)
- 1 DDR3 SO-DIMM, up to 2GB
- 6 USB 2.0 ports
- 2 COM ports
- 1 CFast™ and 1 PCI Express Mini Card slot

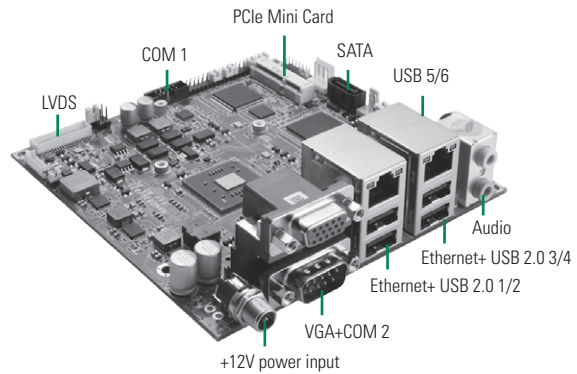


## Core System

CPU	Intel® Atom™ processor N2600 1.6 GHz dual core onboard
System Memory	1 x 204-pin DDR3-800 SO-DIMM, up to 2GB
Chipset	Intel® NM10
BIOS	AMI UEFI BIOS
SSD	1 x CFast™
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x PCI Express Mini Card V1.2
Battery	Lithium 3V/220mAH
Power Input	DC power jack connector +12V DC-in only AT Auto Power ON function supported
Power Requirement	Intel® Atom™ N2600 @1.6 GHz, 1GB DDR3 Max. RMS: +12V @ 0.995A
Size	120 x 120 mm
Board Thickness	1.6 mm
Operating Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

## I/O

MIO	1 x RS-232/422/485 (COM 1 with +5V/+12V powered) 1 x RS-232 (COM 2 with +5V/+12V powered)
SATA	1 x SATA-300
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	2 ports as 10/100/1000 Mbps support Wake-on-LAN, PXE Boot ROM with Intel® 82583V
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	6 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels IN/OUT programmable
TPM	Infineon SLB9635 with TPM 1.2 compliant

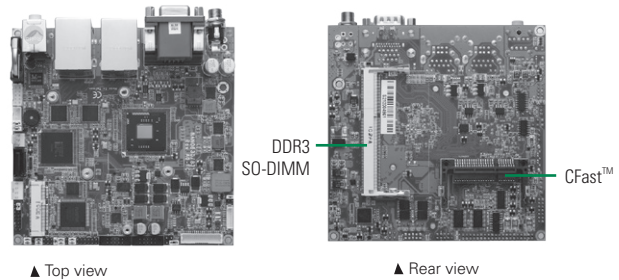

▲ Top view

▲ Rear view



▲ Internal power connector (Optional)

## Display

Chipset	Intel® GMA 3600 graphics core
Memory Size	Share system memory
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel

## Packing List

<b>Standard</b>		
Quick installation guide, user's manual/utility CD, cable		
<b>Cable</b>		
Part Number	Description	Qty
5938262000E	1 x COM cable w/ bracket, P=2.0 mm, L=300 mm	1
<b>Optional</b>		
59382631000E	2 x USB 2.0 wafer cable w/ bracket, 180 mm	

## Ordering Information

<b>Standard</b>		
NANO831VGA-N2600 (P/N: E38K831100)	Nano-ITX SBC with Intel® Atom™ processor N2600, VGA/ LVDS, 2 GbE LANs, 2 COM, 6 USB, CFast™ and audio	



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)  
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [BPI-M5](#)  
[MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-](#)  
[OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-](#)  
[SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-](#)  
[A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)  
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)  
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#)