

# PICO100

Pico-ITX SBC with AMD G-Series APU, AMD A50M, LVDS/DisplayPort (VGA), LAN and Audio

## Features

- AMD G-Series APU T40E (1.0 GHz)/T40R (1.0 GHz)
- 1 DDR3-1066 SO-DIMM, up to 4GB
- 4 USB 2.0 ports
- 2 COM ports



## Core System


CPU	AMD G-Series APU T40E 1.0 GHz dual core or T40R 1.0 GHz single core onboard
System Memory	1 x 204-pin DDR3-1066 SO-DIMM, up to 4GB
Chipset	AMD A50M
BIOS	AMI UEFI BIOS
SSD	1 x CompactFlash™
Watchdog Timer	255 levels, 1 ~ 255 sec.
Expansion Interface	N/A
Battery	Lithium 3V/220mAh
Power Input	DC power jack connector +5V DC-in only AT Auto Power On function supported
Power Requirements	AMD G-Series APU T40E @ 1.0 GHz, 1GB DDR3 Max. RMS: +5V @ 3.16A AMD G-Series APU T40R @ 1.0 GHz, 1GB DDR3 Max. RMS: +5V @ 2.93A
Size	100 x 72 mm
Board Thickness	1.6 mm
Operating Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

## I/O

MIO	1 x PS/2 keyboard and mouse 2 x RS-232
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	1 port as 10/100/1000 Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8111E
Audio	HD Codec audio as MIC-in/Line-out with Realtek ALC662
USB	4 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	N/A

## Display

Chipset	AMD G-Series APU integrated graphics engine T40E/ T40R - Radeon™ HD6250
Memory Size	Max. up to 2GB in 4GB DDR3 module
Display Interface	1 x VGA or 1 x DisplayPort 1 x LVDS; 18-bit single channel

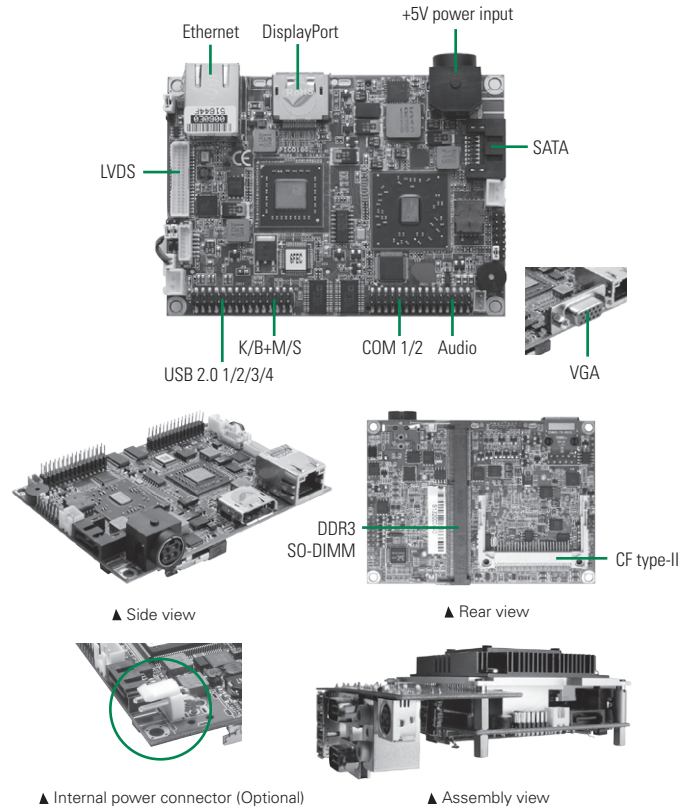

## Packing List

Standard		
Quick installation guide, user's manual/utility CD, cable and accessories		
Accessories		
Part Number	Description	Qty
E393238101	AX93238 I/O board	1
59411208000E	SATA cable	1
59405300610E	SATA power cable	1

## Ordering Information

Standard	
PICO100VGA-T40E (P/N: E38H100109)	Pico-ITX SBC with AMD G-Series APU T40E 1.0 GHz processor, VGA/LVDS, 1 GbE LAN, 2 COM, SATA-600 and audio
PICO100PGA-T40E (P/N: E38H100111)	Pico-ITX SBC with AMD G-Series APU T40E 1.0 GHz processor, DisplayPort/LVDS, 1 GbE LAN, 2 COM, SATA-600 and audio
PICO100VGA-T40R (fanless) (P/N: E38H100110)	Pico-ITX SBC with AMD G-Series APU T40R 1.0 GHz processor, VGA/LVDS, 1 GbE LAN, 2 COM, SATA-600 and audio
PICO100PGA-T40R (fanless) (P/N: E38H100112)	Pico-ITX SBC with AMD G-Series APU T40R 1.0 GHz processor, DisplayPort/LVDS, 1 GbE LAN, 2 COM, SATA-600 and audio
Optional	
5938H820010E	COM x 2 + audio cable
5938H820000E	USB x 4 + Mini DIN cable
5948H823000E	DC power cable (for internal power connector)
59040131000E	DisplayPort to DVI cable, L=220 mm
59050203000E	DisplayPort to HDMI cable, L=185 mm
59091501000E	DisplayPort to DisplayPort cable, L=1500 mm



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Single Board Computers](#) category:*

*Click to view products by [Axiomtek](#) manufacturer:*

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [IMB210VGGA](#) [IB915F-3955](#)  
[MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#) [BEAGLEBOARD POCKET](#) [BPI-M5](#)  
[MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [VAB-600-B](#) [RT5350F-](#)  
[OLINUXINO-EVB](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#) [A13-](#)  
[SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-APLP4-](#)  
[A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q\\_i](#) [M2M \(TELIT\)](#) [RELAY PROFESSIONAL](#) [GCS22.2.080.2.2.I](#)  
[GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-OLINUXINO-LIME2-](#)  
[E16GS16M](#) [A20-OLINUXINO-MICRO-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#)