


LC25 Pro Controller Features



For complete technical information about this product, including installation instructions, application requirements and guidelines, technical specifications, dimensions, and accessories, please refer to the manual at www.bannerengineering.com. Scan the QR code or follow the link below to go to the product series web page, and search for the LC25 Pro Controller manual (p/n 234628), the LC25 Pro Controller with IO-Link manual (p/n 234629), or the WLF12 Pro Flexible LED Strip Light manual (p/n 234631), in the Downloads section. Use of this document assumes familiarity with pertinent industry standards and practices. www.bannerengineering.com/wlf



LC25 Pro Controller Models

Model	Male Connector	Female Connector	LC25C Instruction Manual P/N
LC25C-WLF12-RGB7Q	Discrete control with Pro Editor	Output goes to the WLF12 Pro Flexible LED Strip Light	234628
LC25C-WLF12-KQ	IO-Link control		234629

LC25 Pro Controller with WLF12 Wiring


Pro Controller Wiring

4-pin Male M12 Pinout	Pinout Key and Wiring ⁽¹⁾
	<ol style="list-style-type: none"> 1. Brown - Input 1: 12 V DC to 30 V DC 2. White - Input 3: 12 V DC to 30 V DC 3. Blue - DC Common 4. Black - Input 2: 12 V DC to 30 V DC

Pro Controller with IO-Link Wiring

4-pin Male M12 Pinout	Pinout Key and Wiring
	<ol style="list-style-type: none"> 1. Brown - 18 V DC to 30 V DC 2. White - Not used 3. Blue - DC Common 4. Black - IO-Link Communication

LC25 Connection to the WLF12

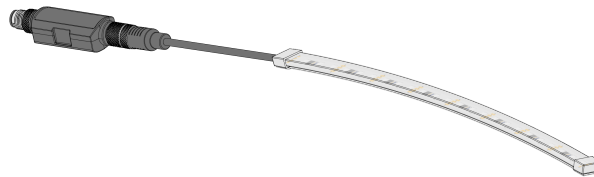

LC25 Pro Controller Specifications

Operating Temperature

-40 °C to +50 °C (-40 °F to +122 °F)

Environmental Rating

IP65, IP67, IP68

Suitable for wet locations per UL 2108

Supply Voltage and Current

LC25 Pro: 12-30 V DC at 30 mA max.

LC25 Pro with IO-Link: 18-30 V DC at 30 mA max.

See the WLF12 Instruction Manual (p/n 234631) for the added current draw from a WLF12

Certifications



Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



Turck Banner LTD Blenheim House
Blenheim Court
Wickford, Essex SS11 8YT
GREAT BRITAIN




⁽¹⁾ Input functionality can change depending on the configuration created with Pro Editor. Refer to wiring diagrams in the selected mode in Pro Editor.

LC25 Pro Controller Accessories


LMBLC25T

- Stainless steel clip bracket
- Includes 1 clip bracket and 2 plastic spacers
- Clearance hole for M5 hardware



LMBLC25TMAG

- Magnetic mounting bracket for attachment to steel and iron surfaces




PSD-24-4

- 90 to 264 V AC 50/60 Hz input
- Includes a 1.8 m (6 ft) US style 5-15P input plug
- 24 V DC UL Listed Class 2 M12 connector output
- 4 A total current



PSW-24-2

- 24 V DC, 2 A Class 2 UL Listed power supply
- 100 V AC to 240 V AC 50/60 Hz input
- 3.5 m (11.5 ft) PVC cable with M12 quick disconnect
- Includes Type A (US, Canada, Japan, Puerto Rico, Taiwan), Type C (Germany, France, South Korea, Netherlands, Poland, Spain, Turkey), Type G (United Kingdom, Ireland, Singapore, Vietnam), and Type I (China, Australia, New Zealand) AC detachable input plugs



PSW-24-1

- 24 V DC, 1 A Class 2 UL Listed power supply
- 100 V AC to 240 V AC 50/60 Hz input
- 2 m (6.5 ft) PVC cable with M12 quick disconnect
- Includes Type A (US, Canada, Japan, Puerto Rico, Taiwan), Type C (Germany, France, South Korea, Netherlands, Poland, Spain, Turkey), Type G (United Kingdom, Ireland, Singapore, Vietnam), and Type I (China, Australia, New Zealand) AC detachable input plugs



Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

Document title: LC25 Pro Controller Datasheet
 Part number: 234627 Rev A
 Original Instructions. © Banner Engineering Corp. All rights reserved.



234627

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Controllers](#) category:

Click to view products by [Banner](#) manufacturer:

Other Similar products are found below :

[3G2A5LK010E](#) [3G2A5SP002](#) [TM171EO22R](#) [NX-ID4342](#) [NX-ID4442](#) [NX-ID5342](#) [NX-ID5442](#) [2700838](#) [NX-ID5142-1](#) [NX-PG0112](#) [NX-MD6121-5](#) [PCIe-7853](#) [DXMR110-8K](#) [DXMR90-4K](#) [DXMR90-X1](#) [LC25C-WLF12-RGB7Q](#) [BB-400](#) [CJ1W-AD081-V1](#) [CJ1W-DA08C](#) [CJ1W-MD233](#) [CJ1W-OD211](#) [C200H-SP001](#) [CJ1W-DA021](#) [CJ1W-DA041](#) [CJ1W-ID211](#) [CJ1W-ID261](#) [CJ1W-MD232](#) [CJ1W-OD261](#) [CJ1W-MD231](#) [CJ1W-OD204](#) [CJ1WIC101](#) [CJ1W-ID201](#) [CJ1W-ID212](#) [CJ1W-AD041-V1](#) [CJ1W-ID232](#) [CJ1W-ID262](#) [CJ1W-OD201](#) [CJ1W-MD263](#) [CJ1W-OD202](#) [CJ1W-ID233](#) [CJ1W-AD042](#) [CJ1W-MD261](#) [CJ1W-ID231](#) [CJ1WII101](#) [CPM2C10EDR](#) [CPM2C-32EDTM](#) [DRT1-COM](#) [DRT2-MD16TA-1](#) [DRT2-MD16TA](#) [DRT2-MD32ML](#)