
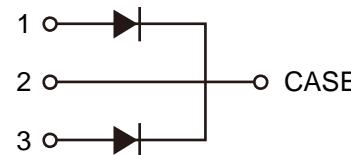


$V_{RRM}$  = 1200 V

$I_F (T_C=165^\circ\text{C})$  = 10 A\*\*

$Q_c$  = 64 nC\*\*

TO-247-3

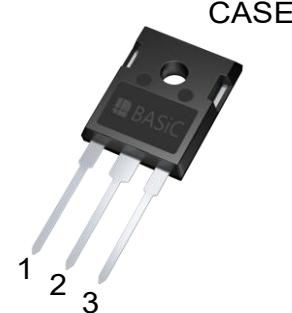

## Features

- Extremely low reverse current
- No reverse recovery current
- Temperature independent switching
- Positive temperature coefficient on  $V_F$
- Excellent surge current capability
- Low capacitive charge

## Benefits

- Essentially no switching losses
- System efficiency improvement over Si diodes
- Increased power density
- Enabling higher switching frequency
- Reduction of heat sink requirements
- System cost savings due to smaller magnetics
- Reduced EMI

## Applications

- Switch mode power supplies (SMPS)
- Uninterruptible power supplies
- Motor drivers
- Power factor correction

## Package Pin Definitions

- Pin1- Anode
- Pin2- Cathode
- Pin3- Anode

## Package Parameters



Part Number	Marking	Package
B1D10120HC	B1D10120HC	TO-247-3

\* Per Leg, \*\* Per Device

**Maximum Ratings (T<sub>c</sub>=25°C unless otherwise specified)**

Symbol	Parameter	Test conditions	Value	Unit
V <sub>RRM</sub>	Repetitive peak reverse voltage		1200	V
V <sub>RSM</sub>	Non-repetitive peak reverse voltage		1200	V
I <sub>F</sub>	Continuous forward current	T <sub>c</sub> =25°C T <sub>c</sub> =165°C	30*/60** 5*/10**	A
I <sub>FSM</sub>	Non-repetitive forward surge current	T <sub>c</sub> =25°C , t <sub>p</sub> =10ms, Half Sine Wave	60*	A
∫i <sup>2</sup> dt	i <sup>2</sup> t value	T <sub>c</sub> =25°C , t <sub>p</sub> =10ms	18*	A <sup>2</sup> S
P <sub>tot</sub>	Power dissipation	T <sub>c</sub> =25°C T <sub>c</sub> =110°C	208* 90*	W
T <sub>j</sub>	Operating junction temperature		-55~175	°C
T <sub>stg</sub>	Storage temperature		-55~175	°C
	TO-247 mounting torque	M3 Screw	0.7	Nm

\* Per Leg, \*\* Per Device

**Thermal Characteristics**

Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
R <sub>th(jc)</sub>	Thermal resistance from junction to case		1.43* 0.72**		K/W

\* Per Leg, \*\* Per Device





## Electrical Characteristics (Per Leg)

## Static Characteristics

Symbol	Parameter	Test conditions	Value			Unit
			Min.	Typ.	Max.	
$V_{DC}$	DC blocking voltage	$T_j=25^\circ C$	1200			V
$V_F$	Diode forward voltage	$I_F=5A T_j=25^\circ C$ $I_F=5A T_j=175^\circ C$		1.40 1.78	1.60 2.20	V
$I_R$	Reverse current	$V_R=1200V T_j=25^\circ C$ $V_R=1200V T_j=175^\circ C$		2 10	90 300	$\mu A$

## AC Characteristics

Symbol	Parameter	Test conditions	Value			Unit
			Min.	Typ.	Max.	
$Q_c$	Total capacitive charge	$V_R=800V T_j=25^\circ C$ $Q_c = \int_0^{V_R} C(V)dV$		32		nC
C	Total capacitance	$V_R=1V f=1MHz$ $V_R=400V f=1MHz$ $V_R=800V f=1MHz$		352 31 23		pF
$E_c$	Capacitance stored energy	$V_R=800V$		16		$\mu J$

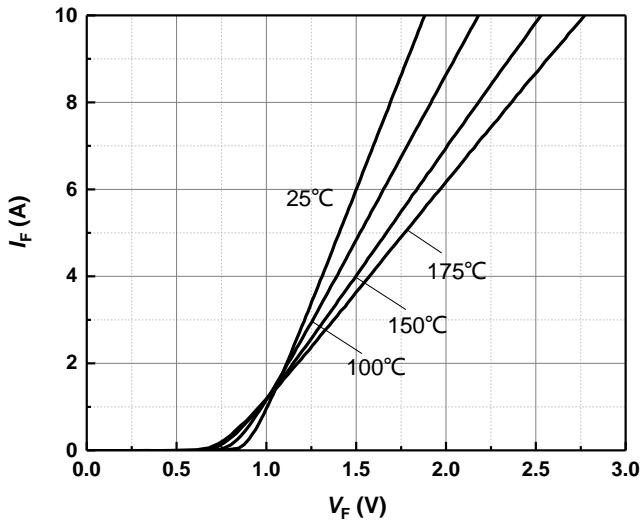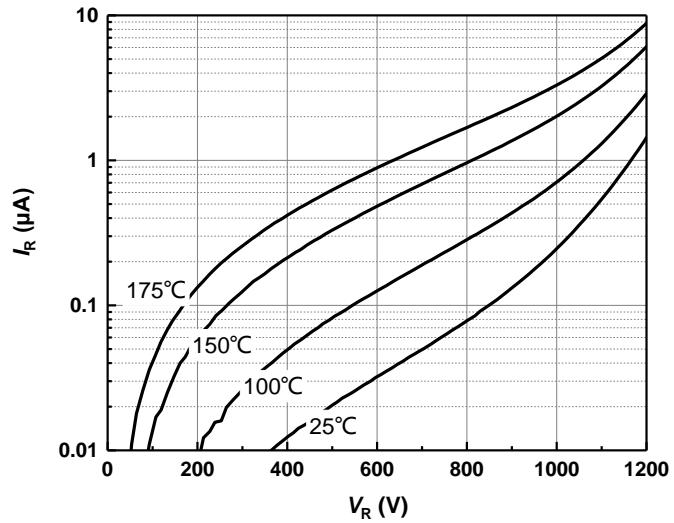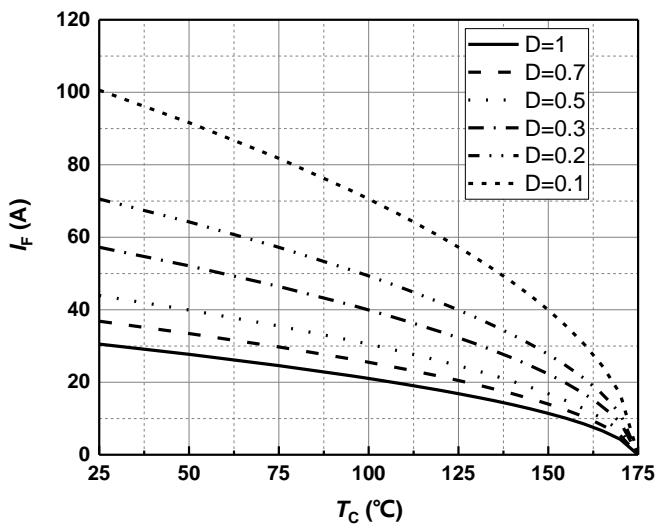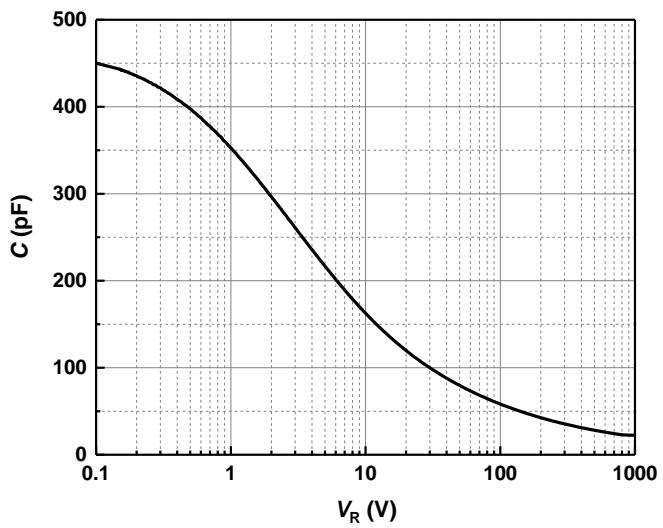**Typical Performance (Per Leg)**

**Figure 1. Typical forward characteristics**

**Figure 2. Typical reverse current as function of reverse voltage**

**Figure 3. Diode forward current as function of temperature, D=duty cycle**

**Figure 4. Typical capacitance as function of reverse voltage,  $C=f(V_R)$ ;  $T_j=25^\circ\text{C}$ ;  $f=1 \text{ MHz}$**

### Typical Performance

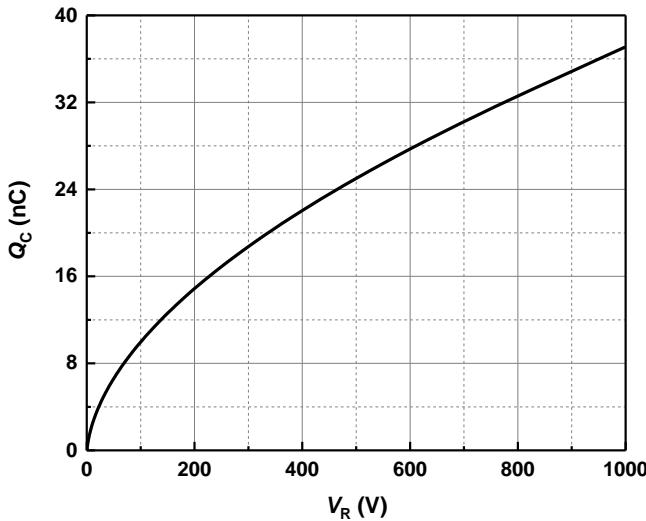


Figure 5. Typical reverse charge as function of reverse voltage

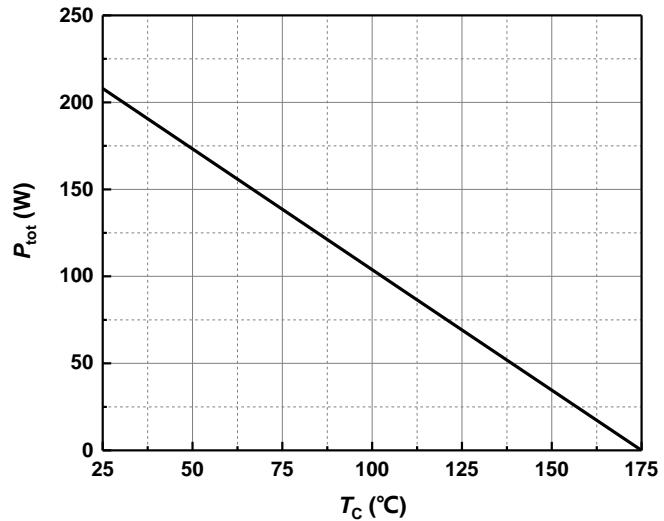


Figure 6. Power dissipation as function of case temperature

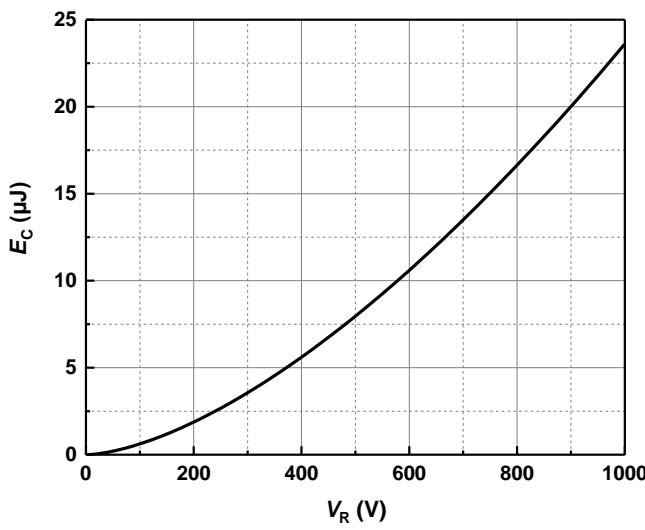


Figure 7. Capacitance stored energy


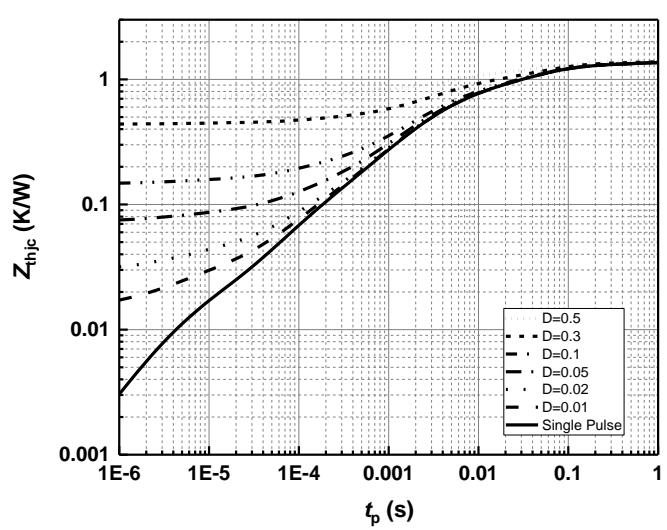


Figure 8. Max. transient thermal impedance,  $Z_{thjc} = f(t)$ , parameter:  $D = t/T$

## Package Dimensions

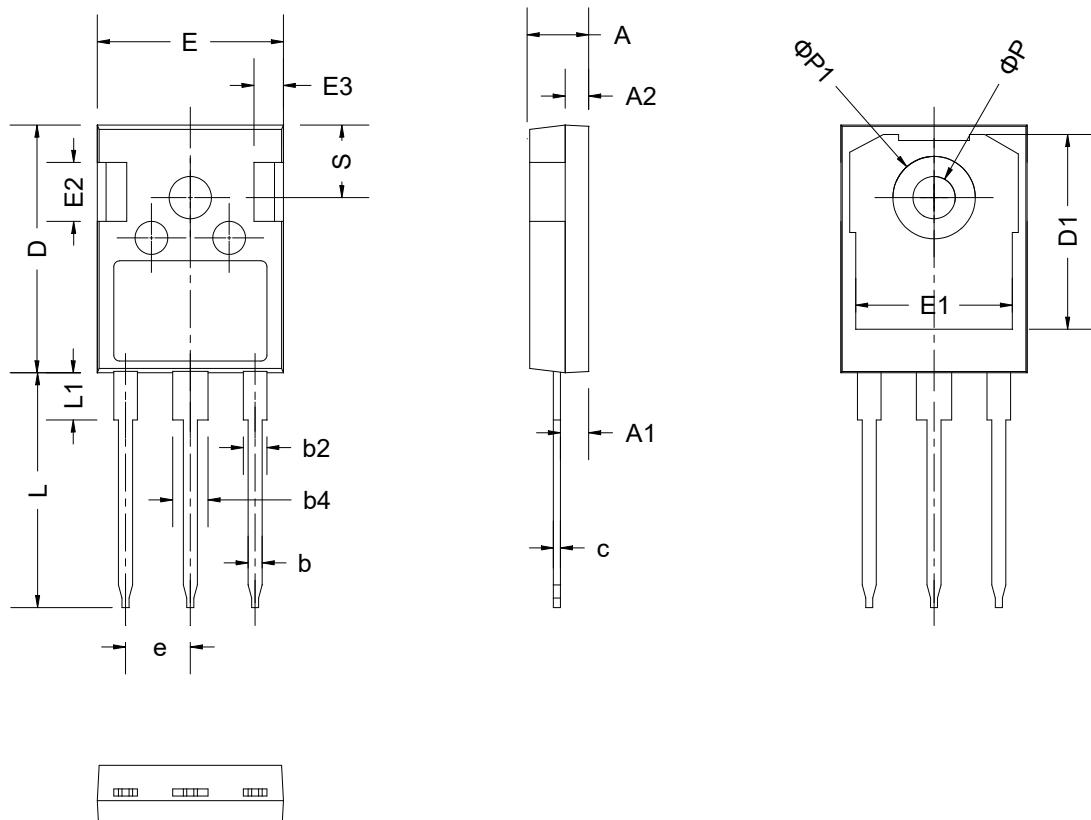

SYMBOL	mm		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
b4	2.91	3.01	3.21
c	0.51	0.61	0.75
D	20.80	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	5.44 BSC		
L	19.62	19.92	20.22
L1	-	-	4.30
$\phi P$	3.40	3.60	3.80
$\phi P_1$	-	-	7.30
S	6.16 BSC		

## Revision History

Document Version	Date of Release	Description of Changes
Rev. 1.0	2020-07-06	Release of the datasheet.
Rev. 1.1	2020-12-05	Characteristics updated.

**BASiC Semiconductor Ltd.**  
**Shenzhen, China**  
**© 2020 BASiC Semiconductor Ltd.**  
**All Rights Reserved.**

### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest BASiC Semiconductor Office

### Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, BASiC semiconductor Ltd. hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by BASiC Semiconductor manufacturer:***

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)  
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)  
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MA4E2501L-1290](#)  
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)  
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)  
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)  
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)