

# Basler Accessories



## Technical Specification

### **CABLE USB 3.0, MICRO B SCREW LOCK/A**

#### **Order Numbers**

**2000033239**

**2000033241**

**2000034891**

Document Number: DG001429

Version: 01 Language: 000 (English)

Release Date: 12 December 2014

## **Contacting Basler Support Worldwide**

### **Europe**

Basler AG  
An der Strusbek 60-62  
22926 Ahrensburg  
Germany

Tel. +49 4102 463 515  
Fax +49 4102 463 599

[support.europe@baslerweb.com](mailto:support.europe@baslerweb.com)

### **The Americas**

Basler, Inc.  
855 Springdale Drive, Suite 203  
Exton, PA 19341  
USA

Tel. +1 610 280 0171  
Fax +1 610 280 7608

[support.usa@baslerweb.com](mailto:support.usa@baslerweb.com)

### **Asia**

Basler Asia Pte. Ltd.  
35 Marsiling Industrial Estate Road 3  
# 05 - 06  
Singapore 739257

Tel. +65 6367 1355  
Fax +65 6367 1255


[support.asia@baslerweb.com](mailto:support.asia@baslerweb.com)

[www.baslerweb.com](http://www.baslerweb.com)

**All material in this publication is subject to change without notice and is copyright  
Basler AG.**

Order Number	Description	Applicable Cameras
2000033239	Data cable USB 3.0, Type A plug to Micro B plug, 3 m	ace USB 3.0
2000033241	Data cable USB 3.0, Type A plug to Micro B plug, 5 m	ace USB 3.0
2000034891	Data cable USB 3.0, Type A plug to Micro B plug, 8 m	ace USB 3.0

Table 1: Cable Types

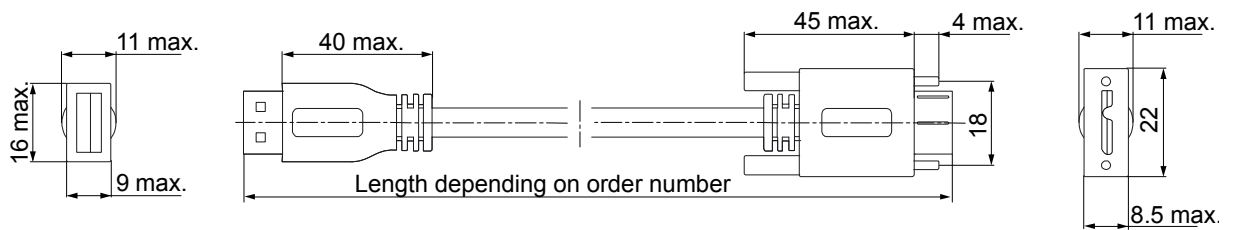

Dimensions in mm

Fig. 1: Cable Overview

### Transfer Rates

	2000033239	2000033241	2000034891
USB 2.0	480 Mbps		
USB 3.0	5 Gbps		

Table 2: Transfer Rates

### Physical Specifications

	2000033239	2000033241	2000034891
Camera-Side Connector	Micro B with screw lock, USB3 Vision-compliant	Micro B with screw lock, USB3 Vision-compliant	Micro B with screw lock
Host-Side Connector	Type A connector, USB-IF-compliant		
Cable Diameter	6.2 mm max.	6.7 mm max.	7.3 mm max.
Minimum Bending Radius	124 mm (20 x cable diameter), fixed installation	134 mm (20 x cable diameter), fixed installation	125 mm, fixed installation
Maximum Bending Cycles	None (fixed installation only)		
Suitable for Drag Chain Applications	No		
Suitable for Robotics Applications	No		

Table 3: Physical Specifications

### Electrical Specifications

	2000033239	2000033241	2000034891
Maximum Operating Voltage	See camera user's manual		

Table 4: Electrical Specifications

## Environmental Specifications

	2000033239	2000033241	2000034891
Operating Temperature	+80 °C max. (not moving)		

Table 5: Environmental Specifications

## General Information

	2000033239	2000033241	2000034891
RoHS Compliance	Yes		
CE Conformity	Yes (RoHS compliance)		
UL Conformity	UL 20272	UL 20272	UL 20276
Warranty	1 year		

Table 6: General Information



The cables are intended for use with the cameras specified in [Table 1](#) only.

Read the camera user's manual including the safety warnings before connecting the cable to the camera. The user's manual also contains further information about pin assignments, power requirements, as well as comprehensive information about installing and using the camera.

You can download the user's manual and related documents for your camera free of charge from the Basler website: [www.baslerweb.com](http://www.baslerweb.com).

## Revision History

Doc. ID Number	Date	Changes
DG00142901000	12 Dec 2014	Initial release of this document.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Cables / IEEE 1394 Cables](#) category:*

*Click to view products by [Basler](#) manufacturer:*

Other Similar products are found below :

[68768-0173](#) [FNY-W6003-01](#) [88764-0800](#) [148700-1](#) [17-200621](#) [17-250051P](#) [954](#) [17-200261](#) [AC102012-1](#) [AC102012-2](#) [FTP-629Y601](#) [45-1345-15](#) [45-1358-15](#) [45-1363-15](#) [IP-USB1\(C10\)S-RW](#) [CABLE/RTP/USB/DT](#) [45-1351-15](#) [45-1357-15](#) [45-1433-1](#) [687680278](#)  
[USBFTVX2SA2N03A](#) [USBFTV2SA2N03A](#) [USBFTV2SA2N05A](#) [MDM9PH004B](#) [MDM9PH004P](#) [FTP-629Y401](#) [FTP-628Y302](#) [FTP-628Y402](#) [CSMNB9MF-5](#) [FNY-W6022](#) [UA-30AMF-SD7B03](#) [UA-30AMFM-SL7B03](#) [USBAPSCC7202A](#) [17-200641](#) [UES-1001A160](#) [UES-1003A160](#) [USBFTVX7SA2N20A](#) [FTP-629Y602](#) [USBCAMCM100](#) [USB A/F\\*2 to 2.54 2\\*5P-SH L=400mm](#) [68784-0075](#) [MINI-SCREW-USB-DATACABLE](#) [19800-010500-200-RS](#) [103-1092-BL-F0050](#) [103-1020-BL-00100](#) [103-1092-BL-F0200](#) [103-1092-BL-F0100](#) [105-1092-BL-00300](#) [105-1092-BL-00200](#) [105-1031-BL-00200](#)