

# BB-232LB9R

## RS-232 9-pin Line Booster



### Introduction

Model BB-232LB9R is a 9-pin RS-232 repeater that retransmits all 8 signals and carries the Ground line through. Many computers, laptops and desktops feature low-power versions of RS-232 ports that are unable to drive port-powered devices or full-length RS-232 cabling.

Model BB-232LB9R amplifies these weak signals up to the RS-232 Standard for uses such as running port-powered devices (see Figure 1). It is suitable for extending full-powered RS-232 cable runs beyond the typical 15 to 30 meters (50-100 ft) distance recommendation (see Figure 2).

*Note: An external power supply is required, not included, sold separately. Model BB-SMI6B12V-P230C1 is recommended.*

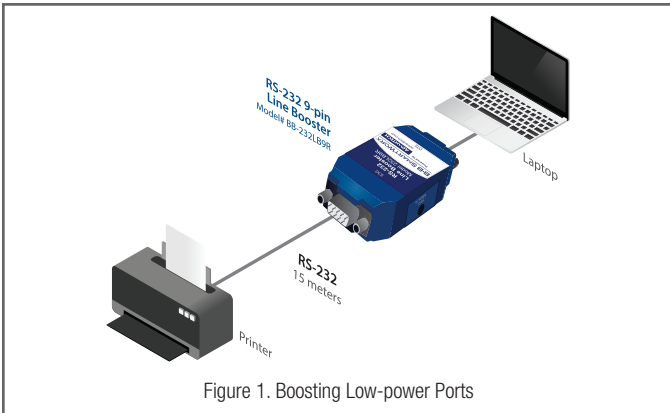


Figure 1. Boosting Low-power Ports

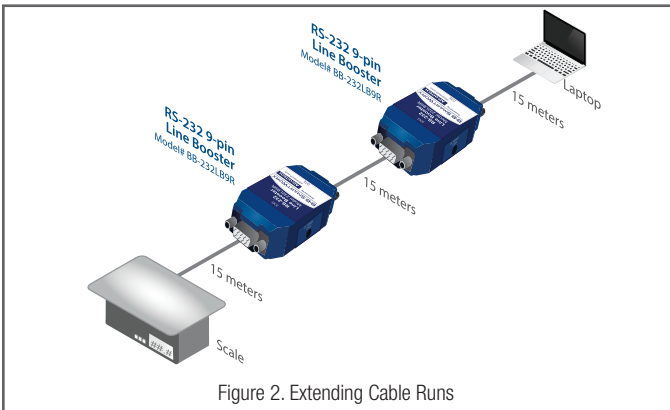


Figure 2. Extending Cable Runs

### Features

- Amplify and extend RS-232 signals beyond 15.24m (50 ft) limit
- Daisy-chain multiple repeaters for even extra range
- Boost lower power RS-232 ports
- Data rates up to 115.2 kbps
- Quick, convenient in-line installation
- Power supply required (not included, sold separately)

### Ordering Information

Model No.	Description
BB-232LB9R	RS-232 9-pin Line Repeater, DB9F to DB9M

### Accessories – Sold Separately

BB-SMI6B12V-P230C1 – power supply, 12 Vdc, 6 W, 2.5mm plug, int'l. AC input  
 BB-9PAMF6 – DB9 male to female cable, 1.83 m (6 ft)

### Specifications

Serial Technology	
DCE Connector	DB9 female
DTE Connector	DB9 male
Data Rate	Up to 115.2 kbps
Power	
Supply Voltage	+12 to +16 Vdc @ 40mA, maximum
Mechanical	
Dimensions	7.9 x 4.3 x 2.1 cm
Environment	
Temperature Range	0 to +70 °C
Meantime4 Between Failures (MTBF)	
MTBF	1560793 hours
Calculation Method	MIL 217F using Parts Count Reliability Prediction Method
Regulatory – Approvals / Standards / Directives	
FCC Class B, CE	
CE - Directives	2014/30/EU – Electromagnetic Compatibility (EMC) 2011/65/EU – amended by (EU) 2015/863 Reduction of Hazardous Substances (RoHS) 2012/19/EU – Waste Electrical and Electronic Equipment (WEEE)
CE - Standards	EN 55032 Class B – Electromagnetic Compatibility of Multimedia Equipment – Emission requirements EN 55024 – Information Technology Equipment – Immunity Characteristics – Limits and methods of measurement

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Interface Modules](#) category:*

*Click to view products by [B+B SmartWorx](#) manufacturer:*

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#)