BB-9PAMF1	BB-9PAMF10
BB-9PAMF3	BB-9PAMF15
BB-9PAMF6	BB-9PAMF25



DB9M to DB9F Serial Cables

Features


- · Fully molded backshell with strain relief for extra protection
- 28 AWG stranded conductors for flexibility
- Thumbscrews for tool-less termination
- DB9 male to DB9 female
- REACH, RoHS-3 (2011/65/EU amended by 2015/863/EU)

Introduction

These ready-to-use serial cables feature fully molded backshells, strain relief protection. and thumbscrews. Suitable for connecting 9-pin serial devices to laptops, computers and more. Choose from 0.3 to 7.6 meter lengths (1 to 25 ft).

Ordering Information

Model No.	Description	Length
BB-9PAMF1	Serial Cable, DB9 Male to DB9 Female	0.3m (1 ft)
BB-9PAMF3	Serial Cable, DB9 Male to DB9 Female	0.9m (3 ft)
BB-9PAMF6	Serial Cable, DB9 Male to DB9 Female	1.8m (6 ft)
BB-9PAMF10	Serial Cable, DB9 Male to DB9 Female	3.1m (10 ft)
BB-9PAMF15	Serial Cable, DB9 Male to DB9 Female	4.6m (15 ft)
BB-9PAMF25	Serial Cable, DB9 Male to DB9 Female	7.6m (25 ft)

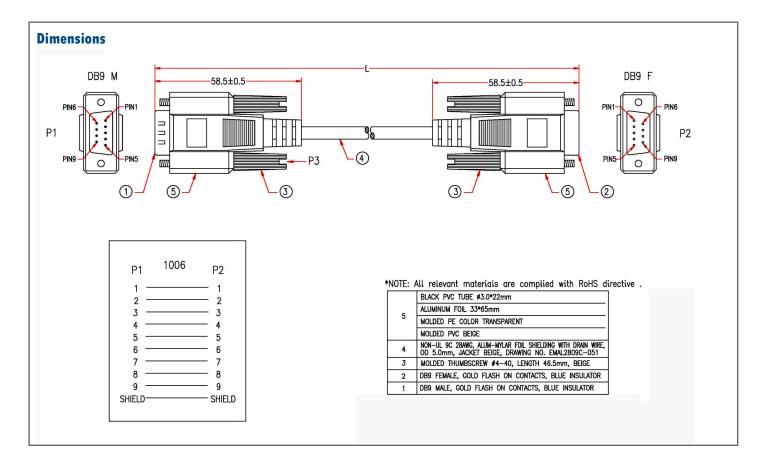

AD\ANTECH

All product specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Cables category:

Click to view products by B+B SmartWorx manufacturer:

Other Similar products are found below :

1200980218 1200980067 RB09P09P-006 RB09P09P-012 RB15P15P-006 RB25P25P-006 RB37P37P-024 172-0906 SHD15P15S-012 SHD15P15S-036 177-710-1-986K7-24MNN ACL-10137-2MM RB09P09P-024 319285-3 RS422-OM2 SHD26P26S-060 SHD44P44S-036 73-6210MM-6 C200H-CN320-EU 49725A 060S2 73231-1321 SDB-50AFFM-SL7A02 49760A 060S2 HDB-26AFFM-SL7A02 30-9503P 30-9522P 73-6220MM-6 1200980058 1200980066 1200980078 1200980052 1200980093 1200980028 1200980021 1200980127 SDB-09AFFM-SL7A02 BB-LDVYCBL 83421-9286 MLDM2L-21P-6K7-18B KSFD1 MM-2J2-021-SS1-41WN HDB-78AMMM-SL7A05 SDB-37AMMM-SL7A03 SDB-15AFFM-SL7A05 ACC-500-163-R 172-1910 VS-25-DSUB-20-LI-2,0 VS-25-DSUB-20-LI-5,0 30-9506MF MLDM2L-25P-6K7-18B