

Heavy Industrial Serial to Fiber Optic Converters

Models BB-FOSTCDRI-PH-MT, BB-FOSTCDRI-PH-SC

ADVANTECH

www.advantech.com



PRODUCT FEATURES

- Converts serial data signals to multi- or single-mode fiber
- 2kV, 3-way isolation (input, output, power circuits)
- Data rate: 9.6 to 115.2 kbps (bit-wise enable)
- -40 to +85 °C wide operating temperature
- IP30 metal panel mount case (DIN rail adaptable)
- FCC, CE, UL C1/D2 (IEC-61850-3, IEEE 1613)
- 10-48 VDC power source required (not included, sold separately)
- Note: 2 units required to extend data via fiber connection

BB-FOSTCDRI-PH-xx series are premium, heavy-duty serial to fiber optic converters. Designed for rugged industrial environments, they meet some of the most exacting compliance testing in the industry including IEC 61850-3 and IEEE 1613 for electrical substation installations. (These specifications are more stringent than NEMA TS1/TS2 transportation application requirements.) Powerful isolation protects equipment and data from damaging ground loops and surges. Additional isolation on the power supply circuits adds a third degree of protection. An external 10-48 VDC power source is required (not included, sold separately).

Packaged in a rugged IP30 metal case, these units convert serial signals to multi-mode or single-mode fiber optic. Bit-wise enabled circuitry automatically detects the data rate without setting a DIP switch.

In addition to direct point-to-point connectivity, operation in multi-drop mode is possible. This enables serial devices to communicate with up to 31 others in a fiber ring. Supporting mixed standards, you can replace other converters and add the EMI / RFI protection inherent to fiber optic communications.

Note: These converters use a proprietary modulated fiber optic signal. Two units are required to extend the data via the fiber optic connection. Any BB-FOSTCDRI-PH-x converter can (only-) connect to another BB-FOSTCDRI-PH-x converter at the other end of the fiber optic cable.

ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
BB-FOSTCDRI-PH-MT	Serial to Fiber Converter, Multi-mode, ST
BB-FOSTCDRI-PH-SC	Serial to Fiber Converter, Single-mode, SC

Note: Two units are required to extend data via the fiber optic connection.

ACCESSORIES – sold separately

BB-MDR-20-24 - DIN Rail Mount Power Supply, 24VDC, 1.0 A Output Power

BB-TBKT1 - Replacement Terminal Block - 2-position, 5.08mm, 8A, 300V

BB-TBKT2 - Replacement Terminal Block - 5-position, 5.08mm, 8A, 300V

All product specifications are subject to change without notice.
BB-FOSTCDRI-PH-MT_BB-FOSTCDRI-PH-SC_1120ds

ADVANTECH

Advantech B+B SmartWorx, 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 1 (800)346-3119/Toll Free | orders@advantech-bb.com | support@advantech-bb.com

Heavy Industrial Serial to Fiber Optic Converters

Models BB-FOSTCDRI-PH-MT, BB-FOSTCDRI-PH-SC




SPECIFICATIONS

SERIAL TECHNOLOGY	
RS-232	TD, RD, GND
RS-422	TDA(-), TDB(+), RDA(-), RDB(+)
RS-485 4-Wire	TDA(-), TDB(+), RDA(-), RDB(+)
RS-485 2-Wire	Data A(-), Data B(+)
Serial Connector	5-position, removable terminal block
Data Rate	9.6 to 115.2 Kbps
Isolation	2 KV RMS, 1 minute
Surge Protection	600 W peak power dissipation Clamping time < 1 pico-second
Industrial Bus	Modbus ASCII / RTU
Bias	Built-in, switchable 1.2KΩ XMT/RCV
Termination	Built-in, switchable 120Ω
FIBER OPTIC TECHNOLOGY	
Type / Wavelength	Multi-mode or Single-mode 1310 nm
Output Power (-MM)	-19 (min.) -14 (max.) dBm
Output Power (-SM)	-15 (min.) -8 (max.) dBm
RCV Sensitivity	≤ -32 dBm
Cable	62.5 / 125 μM (multi-mode), 9 / 125μM (single-mode)
Data Rate	9.6 to 115.2 kbps
Distance	Multi-mode: 2 km Single-mode: 15 km
Fiber Light	Modulated
POWER	
Source	External, required (not included, sold separately)
Power Connector	2-position, removable terminal block
Input Voltage	10 to 48 VDC (56 VDC maximum)
Power Consumption	0.9 W typical (2.6W with termination)

TERMINAL BLOCKS	
Wire Size Accepted	28 to 12 AWG, copper wire only
Pitch	5.08 mm
Insulation Resistance	≥500 MΩ @ 500 VDC
Maximum Torque	5 kg / cm
INDICATORS	
Power	Red LED
TD / RD (each port)	Green LED
MECHANICAL	
Dimensions	13.24 x 9.29 x 3.0 cm
Enclosure	IP30 metal, panel mount
Weight	208.65 gm
MEANTIME BETWEEN FAILURES (MTBF)	
MTBF	127103 hours
MTBF Calc. Method	MIL 217F Parts Count Reliability Prediction
ENVIRONMENTAL	
Operating Temperature	-40 to +85 °C
Storage Temperature	-40 to +85 °C
Operating Humidity	0 to 95%, non-condensing
REGULATORY	
Approvals	FCC, CE, UL C1/D2 (File: E245458), IEC 61850-3, IEEE 1613
CE - Directives	2004/108/EC – Electromagnetic Compatibility Directive 2011/65/EU amended by (EU) 2015/863 Reduction of Hazardous Substances Directive (RoHS) 2012/19/EU – Waste Electrical and Electronic Equipment (WEEE)
CE - Standards	EN 55011 + AC – Information Technology Equipment – Class A RF Emissions EN 61000-6-2 – Generic Immunity Standard for (Heavy) Industrial Environments EN 55032 – Class A Electromagnetic compatibility of multimedia equipment – Emission requirements EN 55024 – Information Technology Equipment – Immunity Characteristics – Limits and methods of measurement

MECHANICAL DRAWING

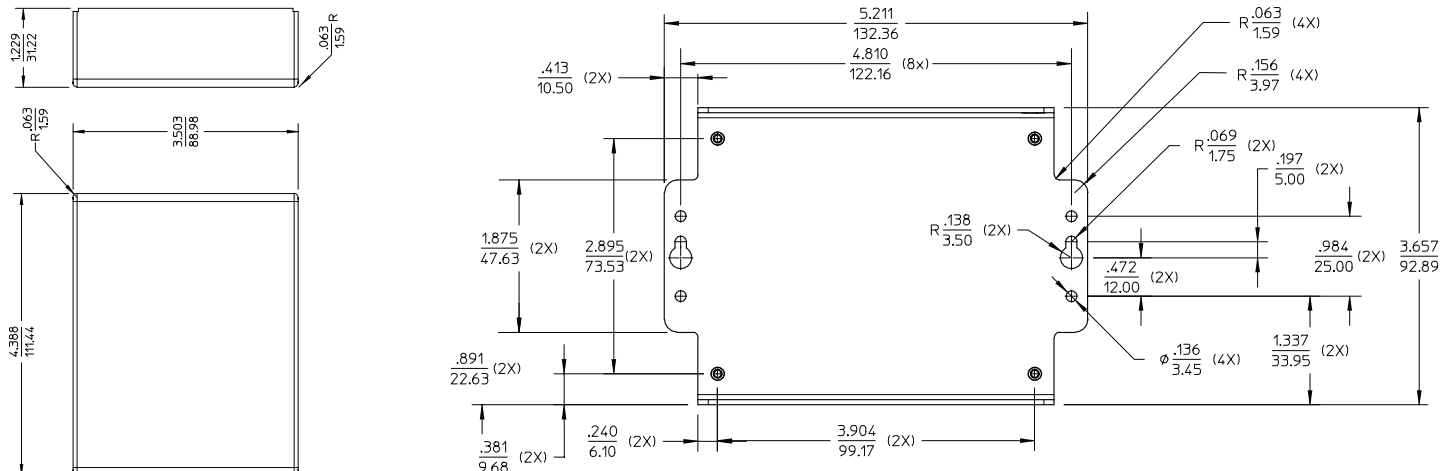

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [B+B SmartWorx](#) manufacturer:

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#)