


PCIE-1620

PCIE-1622

8-Port RS-232 PCI Express Communication Card

8-Port RS-232/422/485 PCI Express Communication Card

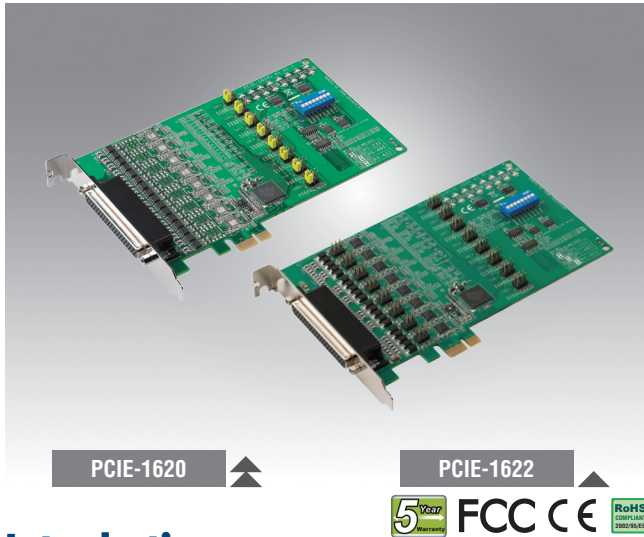

Features

- PCI Express bus 2.0 compliant
- Up to 921.6 kbps speed for extremely fast data transmissions
- Supports any baud rate setting
- 8 x RS-232 or RS-232/422/485 ports
- XR17V358 UART with 256-byte FIFOs
- Supports Windows XP/7/8/10, and Linux operating systems
- Board ID function for fixed COM ports

Introduction

PCIE-1620 and PCIE-1622 are 8-port RS-232/RS-232/422/485 PCI Express communication cards, compatible with the PCI Express x1 specification. Featuring 8 EFT protected ports (up to 1,000 V) with high data transmission speeds (up to 921.6 kbps) and high-performance XR17V358 UARTs with 256-byte FIFOs to reduce CPU load, PCIE-1620 and PCIE-1622 are ideal for diverse applications in multitasking environments.

Specifications

General

- **Bus Type** PCI Express bus 2.0 compliant
- **Bus Interface** PCI Express x1
- **Certification** CE, FCC class A
- **Connectors** 1 x DB62, female (PCIE-1620A/22A/22B)
1 x DB78, female (PCIE-1622C)
- **Dimensions (L x H)** 168 x 111 mm (6.6" x 4.4")
- **Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- **Comm. Controller** XR17V358
- **Data Bits** 5, 6, 7, 8
- **Data Signals** RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD (PCIE-1620A/22B) TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI (PCIE-1622C) RS-422: Tx+, Tx-, Rx+, Rx- (PCIE-1620A/22A/22B) CTS+, CTS-, RTS+, RTS-, Tx+, Tx-, Rx+, Rx- (PCIE-1622C) RS-485: Data+, Data- (PCIE-1622)
- **FIFO** 256 bytes
- **Flow Control** DTR/DSR, RTS/CTS, Xon/Xoff
- **Parity** None, Odd, Even, Mark, or Space
- **Speed** 50 bps ~ 921.6 kbps
- **Stop Bits** 1, 1.5, 2

Protection

Part Number	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCIE-1620A	15KV (air), 8KV (contact)	1000 V		
PCIE-1622B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCIE-1622C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{DC}

Software

- **Bundled Software** ICOM tools
- **OS Support** Windows XP/7/8/10 and Linux (check the software release note for versions supported)

Environment

- **Operating Humidity** 5 ~ 95% RH, non-condensing
- **Operating Temperature** -10 ~ 60 °C (14 ~ 140 °F)
- **Storage Temperature** -25 ~ 85 °C (-13 ~ 185 °F)

Ordering Information

- **PCIE-1620A-BE** 8-port RS-232 PCI Express comm. card
- **PCIE-1622B-BE** 8-port RS-232/422/485 PCI-Express comm. card w/ surge
- **PCIE-1622C-AE** 8-port RS-232/422/485 PCI-Express comm. card w/ surge and isolation protection

Accessories

- **OPT8C-AE** 1 x DB62 to 8 x DB25 cable, 1 m (for PCIE-1620A-BE and PCIE-1622B-BE)
- **OPT8H-AE** 1 x DB62 to 8 x DB9 cable, 1 m (for PCIE-1620A-BE and PCIE-1622B-BE)
- **OPT8J-AE** 1 x DB78 to 8 x DB9 cable, 1 m (for PCIE-1622C-AE)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [B+B SmartWorx](#) manufacturer:

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#)
[UC-313](#)