# **Low Voltage DC Power Cord**

Locking Female Barrel Connector, Stripped/Tinned Leads Model PSPT-LB





#### **FEATURES**

- Standard DC Power Plug
- Molded Strain Relief
- 2.5 x 5.5mm Locking Barrel Connector
- Stripped and Tinned Leads
- 6.5mm Locking Thumb Screw
- 1m (39.4in) Length

Model PSPT-LB is a power cable with a 2.5x5.5mm threaded locking barrel plug on one end and stripped and tinned leads on the other - for use with industrial power supplies.

#### ORDERING INFORMATION

MODEL NUMBER	DESCRIPTION
PSPT-LB	Low-voltage DC Power Cord, Barrel, Stripped/Tinned Leads, 1 m


### **SPECIFICATIONS**

Smooth

Cable Type/Size		SPT-1 cord, 18AWG x 2, stranded wire, 300V, 75 °C rated, PVC jacket		
Cable Jacket C	olor	Black		
Polarity		Stripe conductor co	onnected to inner of barrel(+)	
<b>Overall Length</b>		1000 +100, -0 mm		
Cable Outer Dia	ameter	2.7 x 5.4 +/- 0.1 mm		
End "A" Termir	nation (P1)	Locking female barrel, 5.5 x 2.5mm, with 6.5mm locking thumb screw		
End "B" Termination		Lead wires, stripped and tinned		
Strain Relief		SR2 type for GT-21097 enclosure		
Compliance		RoHS		
COLOR	COLOR SPLIT (MM)		STRIP & TIN (MM)	
Ribbed 74			9	

### **MECHANICAL DRAWING**

Units = mm

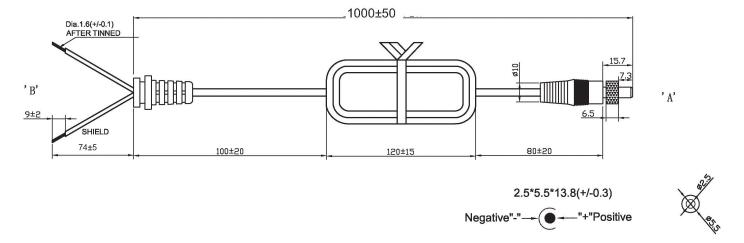

All product specifications are subject to change without notice.

PSPT-LB\_0218ds



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for DC Power Cords category:

Click to view products by B+B SmartWorx manufacturer:

Other Similar products are found below:

2R6006A20A120 172-4000 172-4101 172-7443-E 21033836407 2J-1865A 426055400-3 MN47A4BC01M010 H-OU-2 CA0002 420680840-3 426451500-3 P162PT4-36 1-832692-4 FJ-VSP 3M 96CB-POWER-B-1.8M2 426040200 CA0006 H-OU-27 1700019464 FJ-VSP 10M MN47B4BC01M040 H-OU-20 2-836917-8 867566-1 804001P03M050G 2050KH1-BK 58257-1069 2058KZ3-BK 216603-0037 1011147 1011324 1012028 BXC-10567 172-2555 32102-022800-200-RS P29000-M2 P29004-M2 AK-SC-31 AK-SC-32 DC.EXT.0200.0050 DC.EXT.0200.0100 DC.CAB.0201.0150 DC.CAB.0301.0150 DC.CAB.0610.0150 DC.CAB.0700.0150 DC.CAB.1000.0300 DC.CAB.1100.0150 DC.CAB.1400.0150