


New Product Bulletin

PB00034

DataTuff Cat 5e PROFINET Cables from Belden

New UL-rated, quad design PROFINET cables from Belden provide Ethernet connectivity using open standard technology to easily connect devices across all systems for efficient factory automation.

Equipped with quad design, CMX Outdoor, Power Limited Tray Cables (PLTC) and a full range of other Underwriters Laboratories (UL) standards, Belden PROFINET cables make it easier to install the network, maximizing uptime even in the most demanding indoor or outdoor environments.

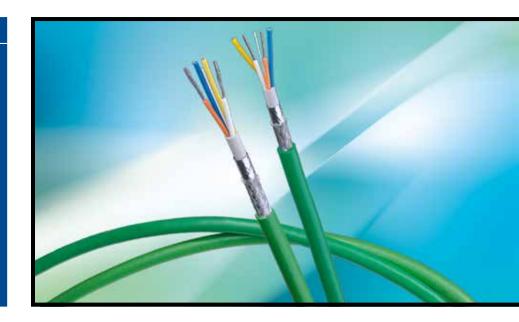

- Flexible three cable options with ranges of flexibility, ruggedized with UL ratings, and allowing up to 5 million flexes
- Easy to install and use quad design compatible with Siemens Fast Connect connectors and Belden's entire PROFINET portfolio
- Withstands harsh conditions UL standards, including CMX Outdoor and PLTC, allow
 cabling to be used in Class I Div II hazardous areas, as well as outdoors, maximizing uptime
 even in harsh environments

Complete PROFINET Solution Package

The new cabling enhances Belden's entire PROFINET package, along with Hirschmann switches and Lumberg Automation connectivity components, giving engineers a single source for all Ethernet-based devices and support services. Network engineers can now easily connect their devices across all systems for efficient automation.

Be certain. Belden.



Design Elements at a Glance

	7960A	7961A	7962A
Product Type	А	В	С
Conductor	Solid 22 AWG Bare Copper	Stranded 22 AWG 7 x 0.25 mm Tinned Copper	Stranded 22 AWG 19 x 34 Tinned Copper
Shielding	Foil / Braid	Foil / Braid	Foil / Braid
Jacket Type	PVC	PVC	TPE (Weld-Splatter Resistant)
CMX Outdoor Rated	✓	✓	✓
Sunlight Resistant	✓	✓	✓
Operating Temperature	-40°C to +80°C	-40°C to +80°C	-40°C to +80°C
Oil Resistant	• Class 43 • IEC 60811-2-1	• Class 43 • IEC 60811-2-1	• IEC 60811-2-1
Flame Ratings	C(UL) CMG FT4IEEE1202/383VW-1IEC 60332-1-2	• C(UL) CMG FT4 • IEEE1202/383 • VW-1 • IEC 60332-1-2	• C(UL) CM • FT1

[•] NEC type PLTC listed, which is approved for cable tray use in Class I Div II hazardous areas

Belden PROFINET Selling Points

Why do we utilize a quad design?

The cable's quad design gives it a smaller diameter than other paired, 22AWG PROFINET cables, making it more pliable while remaining compatible and easy to install with Siemens Fast Connect, Lumberg Automation connectors or Belden metal body plugs.

What is the advantage of the UL-PLTC rating on all three products?

- The PLTC rating specifically allows the cables to be run in existing cable trays with other power-limited cables, with no separate routing needed.
- With these ratings, network engineers can better insure their networks against hazards and harsh conditions, reducing risk and maximizing both network efficiency and reliability for mission-critical applications.

 $[\]bullet \ \text{NEC type ITC per article 727-ITC cables may carry up to 5 amps at 150V}, which is significantly greater than that allowed by PLTC and the significant PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed by PLTC cables may carry up to 5 amps at 150V, which is significantly greater than the properties of the prop$


^{• 600}V AWM-rated for wiring equipment, such as motor control centers and switchgear

Be Certain with Belden



Benefits at a Glance


	7960A	7961A	7962A
Flexibility / Common Installations	Good	Better	Best
	 Solid Conductor 	• Stranded 22 AWG 7 x 0.25 mm	• Stranded 22 AWG 19 x 34 along
	 Stationary applications 	Flexing - can be installed in	with TPE Jacket
		panels or plant floors	 High Flex - Rated for 5 million flexes
Shielding	Best	Best	Best
	• Foil / Braid	• Foil / Braid	• Foil / Braid
	 High Noise Resistance 	High Noise Resistance	High Noise Resistance
Jacket Type	Good	Good	Best
	• PVC	• PVC	• TPE
			Weld-Splatter Resistant, Highly Flexible

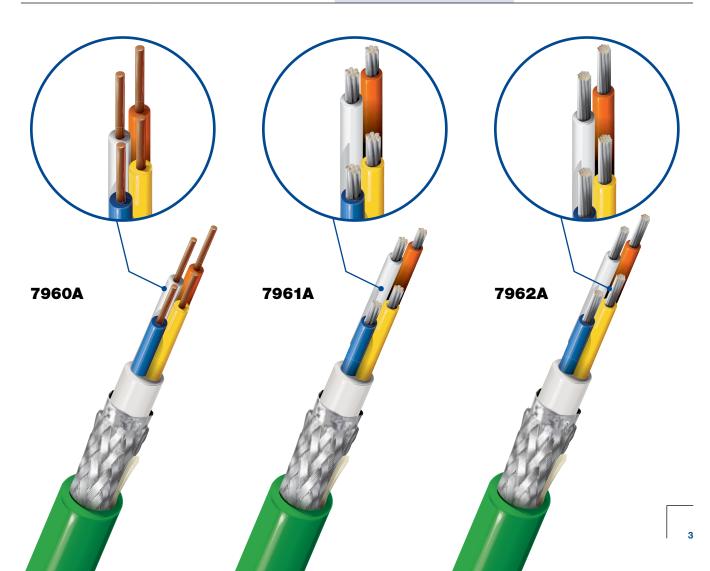



Always Stay Ahead with Belden

In a highly competitive environment, it is crucial to have reliable partners who are able to add value to your business. When it comes to signal transmissions, Belden is the No. 1 solutions provider. We understand your business and want to know your specific challenges and targets to see how effective signal transmission solutions can push you ahead of the competition. By combining the strengths of our five leading brands, Belden, GarrettCom, Hirschmann, Lumberg Automation and Tofino Security, we are able to offer the solution you need. Today, it may be a single cable, a switch or a connector, thus solving a specific issue; tomorrow, it can be a complex range of integrated applications, systems and solutions.



Belden Competence Center

As the complexity of communication and connectivity solutions has increased, so have the requirements for design, implementation and maintenance of these solutions. For users, acquiring and verifying the latest expert knowledge play a decisive role in this. As a reliable partner for end-to-end solutions, Belden offers expert consulting, design, technical support, as well as technology and product training courses, from a single source: Belden Competence Center. In addition, we offer you the right qualification for every area of expertise through the world's first certification program for industrial networks. Up-to-date manufacturer's expertise, an international service network and access to external specialists guarantee you the best possible support for products from Belden, GarrettCom, Hirschmann, Lumberg Automation and Tofino Security. Irrespective of the technology you use, you can rely on our full support – from implementation to optimization of every aspect of daily operations.

About Belden

Belden Inc., a global leader in high-quality, end-to-end signal transmission solutions, delivers a comprehensive product portfolio designed to meet the mission-critical network infrastructure needs of industrial, enterprise and broadcast markets. With innovative solutions targeted at reliable and secure transmission of rapidly growing amounts of data, audio and video needed for today's applications, Belden is at the center of the global transformation to a connected world. Founded in 1902, the company is headquartered in St. Louis and has manufacturing capabilities in North and South America, Europe and Asia. For more information, visit us at www.belden.com; follow us on Twitter www.belden.com; follows and the second second

Belden, Belden Sending All The Right Signals, Hirschmann, GarrettCom, Tofino Security and the Belden logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Belden and other parties may also have trademark rights in other terms used herein.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Multi-Conductor Cables category:

Click to view products by Belden manufacturer:

Other Similar products are found below:

89182-010-1000 89705-008-500 6000FE-877-1000 CS2885-000 M27500-20SP2S23 6300FE-877-U1000 6309UE-877-1000 M3905-BK005 6502FE 8771000 6541PA-008-U1000 CV6807-000 CW9530-000 CX6543-000 CXA-0066-20-4-9CS2973 CXA-0078-16-1-9CS2405 CXA-0078-22-4-9CS2405 CXA-0078-24-4-9CS2405 CXA-0140-16-6/9-9CS2405 CY0660-000 720451-000 752687-000 768146-000 773159-000 82841-877-5000 83318E-009-500 8348-060-500 83559-002-1000 83653-002-5000 83659-002-1000 83709-002-1000 8404-060-500 8469 060100 858171-000 8628-060-500 868361-001 8730-060-1000 8737-060-U1000 8747-060-100 8747-060-1000 8769-060-1000 8775-060-500 8780-060-1000 8782-001-U1000 88444-002-1000 9159-060-500 939870-000 9423 060U500 9444 060U1000 9497 0001000 9515-060-1000