


APPLICATION

Instrumentation and computer cable for data transmission applications.

CONSTRUCTION

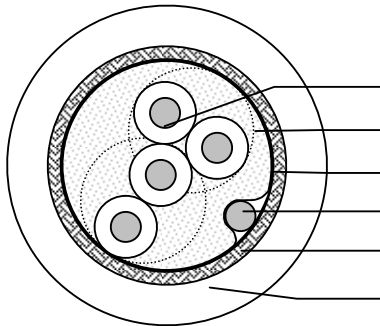

- 1. Insulated conductor**
- 2. Filler**
- 3. Foil**
- 4. Drainwire**
- 5. Braiding**
- 6. Sheath**

1. Insulated conductor

Conductor
Insulation material
Diameter over insulation
Colour of insulation

AWG24 (7xAWG32) tinned Cu
Datalene
1.24 ± 0.06 mm
Pair 1: White/blue; blue/white
Pair 2: White/orange; orange/white

2. Filler

Material

Polypropylene

3. Foil (Z-fold®)

Material
Thickness

Aluminium / Polyester
9 / 12 µm

4. Drainwire

AWG24 (7xAWG32) tinned Cu

5. Braiding


Material
Coverage

Tinned copper wire
>65%

6. Sheath

Material
Colour
Minimum wall thickness
Minimum average wall thickness
Nominal diameter over sheath

PVC
Chrome
0.711 mm
0.813 mm
6.86 mm

	TECHNICAL DATA SHEET	code	8102
		version	2
		date	2005-11-03
	8102	page	2/2

REQUIREMENTS AND TEST METHODS

Electrical:

Max. operating voltage type CM	300 V RMS
Max. operating voltage type AWM 2919	30 V RMS
Max. continuous current per conductor @ 25 °C	1.8 A
Nominal capacitance conductors of pair @ 1 kHz	41.0 pF/m
Max. capacitance conductors of pair @ 1 kHz	45.9 pF/m
Nominal capacitance conductor to shield @ 1 kHz *	72.2 pF/m
Nominal impedance	100 Ω
Nominal inductance	0.75 microH/m
Nominal resistance conductor	78.7 Ω/km
Nominal resistance shield	13.0 Ω/km

*One conductor to other conductor and shield.

**Nominal values are for information only.

Mechanical and physical:

Temperature range	-30 to +80 °C
Nominal weight per 100m	approx. 5kg
Maximum pulling tension	120 N
Minimum bending radius	70 mm

MARKING

Text: Inkjet printing in blue

BELDEN V 8102 CM 2PR24 SHIELDED (UL) E108998 OR AWM 2919 LOW VOLTAGE
COMPUTER CABLE OR C(UL) CM xxmm

xx = jaartal +15

mm= maand

PACKAGING

On non-returnable reels with a nominal length of 305m (-0, +10%) or on non-returnable reels. Each reel is labelled with the following data: Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [Belden](#) manufacturer:

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8917-GRN/YEL-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#)
[CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-0062-20-9/5-9](#)
[CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-U1000](#)
[CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#)
[CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#) [768146-000](#) [773159-000](#) [7934A-BLK-](#)
[1000](#) [8125-CHR-100](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#)
[83006-DK-GRN-100](#) [83008-WHT-1000](#) [83009-BLK-100](#) [83009-VIO-100](#)