

**Product:** <u>9708</u> ☑


Speaker Cable, 2 Conductor 18 AWG, High Conductivity, Siamese



## **Product Description**

Speaker Cable, 18 AWG stranded (16x30) ETP high-conductivity copper conductors, PVC insulation, parallel: (1) tinned, (1) bare.

## **Technical Specifications**

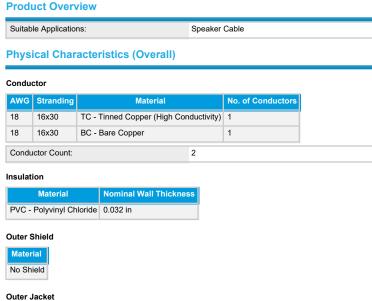

### Outer Jacket

Material	Nominal Diameter
PVC - Polyvinyl Chloride	0.11 x 0.22 in

# **Electrical Characteristics**

# Conductor DCR

Nominal Conductor DCR 6.48 Ohm/1000ft

### Inductance

Nominal Inductance

### Current

Max. Recommended Current [A]
4.2 Amps per Conductor at 25°C

## Voltage

Non-UL Voltage Rating 300 V RMS

**Temperature Range** 

Non-UL Temp Rating:	60°C
Operating Temp Range:	-20°C To +60°C

## **Mechanical Characteristics**

Bulk Cable Weight:	19 lbs/1000ft
Max. Pull Tension:	50 lbs
Min. Bend Radius/Minor Axis:	2 in

#### **Standards**

CPR Euroclass:	Eca	

## **Applicable Environmental and Other Programs**

Environmental Space:	Indoor (Not Riser or Plenum)
EU Directive 2000/53/EC (ELV):	Yes
EU Directive 2003/96/EC (BFR):	Yes
EU Directive 2011/65/EU (RoHS 2):	Yes
EU Directive 2012/19/EU (WEEE):	Yes
EU Directive 2015/863/EU (RoHS 2 amendment):	Yes
EU Directive Compliance:	EU Directive 2003/11/EC (BFR)
EU CE Mark:	Yes
MII Order #39 (China RoHS):	Yes

# Suitability

Suitability - Indoor:	Yes
,	

## Flammability, LS0H, Toxicity Testing

ICC Flammahilitu	IEC 60222 1 2	
IEC Flammability:	IEC 60332-1-2	

#### Plenum/Non-Plenum

Plenum (Y/N): No	Plenum (Y/N):	No	
------------------	---------------	----	--

# **Part Number**

# Variants

Item #	Color	Put-Up Type	Length	UPC
9708 368500	Clear, Transparent	Reel	500 ft	612825257134
9708 368U500	Clear, Transparent	UnReel	500 ft	612825257172
9708 3681000	Clear, Transparent	Reel	1,000 ft	612825257165
9708 368U1000	Clear, Transparent	UnReel	1,000 ft	612825257141
Footnote:			C - CRATE	REEL PUT-UP.

# History

### © 2022 Belden, Inc

## All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Multi-Conductor Cables category:

Click to view products by Belden manufacturer:

Other Similar products are found below:

8916-GRY-100 8917-BLK-100 8918-GRN/YEL-100 8920-BRN-1000 8920-RED-1000 89907-LT-DEC/GRY-500 CR3909-000 CR3927000 01342.35T.01 01364.35T.01 CS2885-000 CS8782-000 CS9912-000 6200UE-NAT-U1000 CTC-0062-20-9/5-9 CTC-0062-22-9/5-9
6304FE-877-U500 6309UE-877-1000 6320UE-NAT-U1000 644833-000 6502FE 8771000 6504UE-877-U1000 CW9530-000 CX6543-000
CXA-0066-20-4-9CS2973 CXA-0078-16-1-9CS2405 CXA-0078-22-4-9CS2405 CXA-0078-24-4-9CS2405 CXA-0140-16-6/9-9CS2405
CY0660-000 706/2R-BLACK-EACH 720451-000 730859-000 MCC-USB-4-250 752687-000 768146-000 773159-000 7934A-BLK-1000
8125-CHR-100 8164-CHR-1000 820457-000 8205-CHR-1000 8240-BLK-U1000 82723-NAT-1000 82907-NAT-500 83003-YEL-500
83005-WHT-500 83006-DK-GRN-100 83008-WHT-1000 83009-BLK-100