

M12-Receptacle Connectors In Accordance With IEC 61076-2-101


RSFM/0.5 M | RKFM/0.5 M



Male, 3-, 4-, 5- and 8-Pole

Receptacle connector, combined FIXCON/M12 male connector for front mounting, assembled stranded wire, solder contacts potted with epoxy, chassis side thread M16 x 1.5 (panel nut RSKFM 16).

RSFM/0.5 M

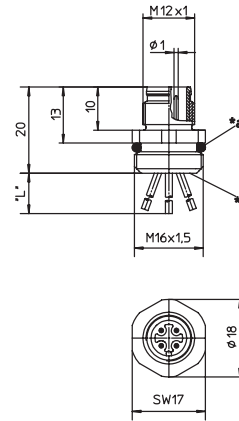


- *a O-ring enclosed separately
- *b solder contacts potted with epoxy
- *L* 0,5 m



Female, 3-, 4-, 5- and 8-Pole

Receptacle connector, combined FIXCON/M12 female connector for front mounting, assembled stranded wire, solder contacts potted with epoxy, chassis side thread M16 x 1.5 (panel nut RSKFM 16).

RKFM/0.5 M

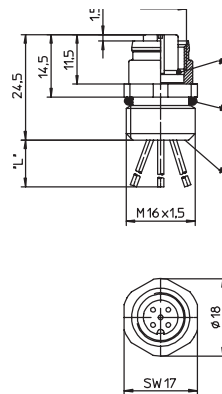


- *a O-Ring
- *b O-ring enclosed separately
- *c solder contacts potted with epoxy

Pin Assignments


Face Views / M12, Male / Female

3 pole




- 1 = brown
- 3 = blue
- 4 = black

4 pole




- 1 = brown
- 2 = white
- 3 = blue
- 4 = black

5 pole



- 1 = brown
- 2 = white
- 3 = blue
- 4 = black
- 5 = green/yellow

8 pole



- 1 = white
- 2 = brown
- 3 = green
- 4 = yellow
- 5 = grey
- 6 = pink
- 7 = blue
- 8 = red



Be Certain with Belden

M12-Receptacle Connectors In Accordance With IEC 61076-2-101
 RSFM/0.5 M | RKFM/0.5 M

Technical Data

Environmental









Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +80°C (+176°F)

Mechanical

Housing / Molded body CuZn, nickel-plated
 Insert PA
 8 poles TPU
 Contact CuZn, pre-nickel and 0.8 microns gold-plated
 O-ring FKM

Electrical

Contact resistance ≤ 5 mΩ
 Nominal current at 40°C 3-5 poles 4 A
 8 poles 1,5 A
 Nominal voltage 3-4 poles 240 V
 5 poles 60 V
 poles 30 V
 Rated voltage 3-4 poles 250 V
 5 poles 63 V
 8 poles 36 V
 Test voltage 3-4 poles 2.0 kV eff. / 60 s
 5-8 poles 1.5 kV eff. / 60 s
 Insulation resistance > 10⁹ Ω
 Pollution degree 3

Part Number		Pins	Leads (mm ²)	Characteristics
RSFM 3/0.5 M	RKFM 4-3/0.5 M	3	0.34	 
RSFM 4/0.5 M	RKFM 4/0.5 M	4	0.34	 
RSFM 5/0.5 M	RKFM 5/0.5 M	5	4 x 0.34 / 1 x 0.50	 
RSFM 8/0.5 M	RKFM 8/0.5 M	8	0.25	 

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [Belden](#) manufacturer:

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)