
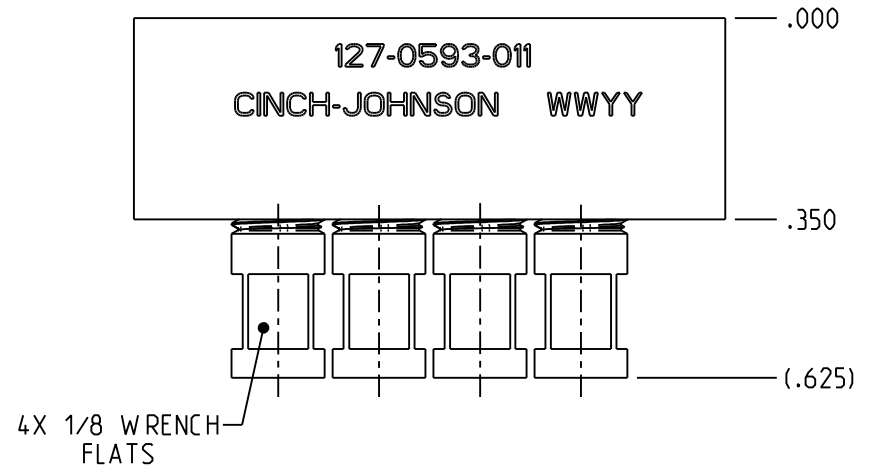


NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH: (127-0593-011)
 - 1.1 BODY & SOLDER SLEEVE: GOLD PLATED STAINLESS STEEL
 - 1.2 CLAMP NUT: PASSIVATED STAINLESS STEEL
 - 1.3 CONTACT: GOLD PLATED BERYLLIUM COPPER
 - 1.4 INSULATOR: PTFE (TEFLON)
2. ELECTRICAL SPECIFICATIONS:
 - 2.1 IMPEDANCE: 50 OHMS
 - 2.2 FREQUENCY RANGE: DC - 40 GHz
 - 2.3 VSWR:
 - 2.3.1 0-18 GHz = 1.25 MAX
 - 2.3.2 18-26.5 GHz = 1.35 MAX
 - 2.3.3 26.5-40 GHz = 1.50 MAX
 - 2.4 WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
 - 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN AT SEA LEVEL
 - 2.6 INSULATION RESISTANCE: 5000 MEGOHM MIN
 - 2.7 CONTACT RESISTANCE:
 - 2.7.1 CENTER CONTACT: 6.0 MILLIOHM MAX
 - 2.7.2 OUTER CONDUCTOR: 2.0 MILLIOHM MAX
 - 2.7.3 CABLE SHIELD TO CONNECTOR BODY: 0.5 MILLIOHM MAX
 - 2.8 CORONA LEVEL: 190 VOLTS MIN AT 70,000 FEET
 - 2.9 RF LEAKAGE: -80 dB TYPICAL, TESTED AT 2.5 GHz
 - 2.10 RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 325 VRMS MIN AT 4 & 7 MHz
3. MECHANICAL SPECIFICATIONS:
 - 3.1 ENGAGEMENT FORCE: 15 LBS MAX PER POSITION
 - 3.2 DISENGAGEMENT FORCE: 5 LBS MIN PER POSITION
 - 3.3 CABLE ACCEPTABILITY: MIL-C-17/133, RG 405
 - 3.4 CABLE RETENTION: 30 LBS MIN AXIAL, 16 IN-OZ MIN TORQUE
 - 3.5 DURABILITY: 100 CYCLES MIN
4. ENVIRONMENTAL: (MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF DSCC DWG NO. 94007)
 - 4.1 OPERATING TEMPERATURE: -65°C TO 165°C
 - 4.2 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT 125°C HIGH TEMP
 - 4.3 MECHANICAL SHOCK: MIL-STD-202, METHOD 213, CONDITION I
 - 4.4 CORROSION: MIL-STD-202, METHOD 101, CONDITION B
 - 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
 - 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106, EXCEPT STEP 7B OMITTED

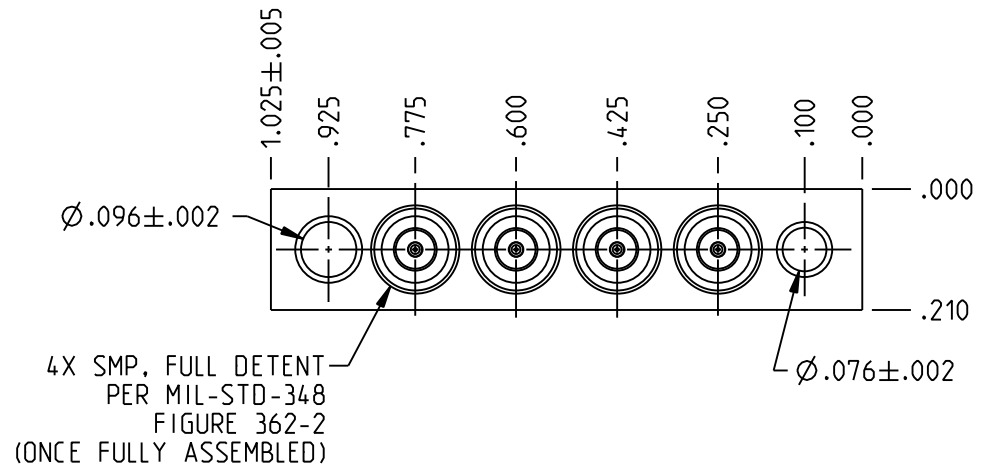

 <small>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</small>	<small>3RD ANGLE PROJECTION</small> 	JOHNSON		
	RoHS2 <input checked="" type="checkbox"/> 2011/65/EU <small>UNLESS OTHERWISE SPECIFIED UNITS: INCH</small>	Title: ASSEMBLY, MALE, FD. CABLED, SMP, 4 POSITION		
.XX ±.01 .XXX ±.003 ANGLES ±2°	Model No.: 127-0593-011/020	Size: A	DO NOT SCALE DRAWING	Date: 3/28/2018 Sheet: 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)