

DKF Series Metric Test Cable Assemblies

Features

- Best combination of price and performance
- Uses high performance HP190S cable
- 18 GHz operation
- Strain relief boots to put up with everyday handling
- Passivated stainless steel M39012 compliant interfaces
- Standard lengths stocked by distributors
- Custom Lengths available


Applications

- High end test laboratories
- Production test setups
- Production use



Table 1: Standard Part Numbers Available Through Franchised Distributors

Part Number	Description	Insertion Loss, dB (max at 18 GHz)
2121-DKF-M0030	DKF metric assembly, SMA Straight Male to SMA Straight Male, 30cm	0.63
2121-DKF-M0050	DKF metric assembly, SMA Straight Male to SMA Straight Male, 50cm	0.88
2121-DKF-M0075	DKF metric assembly, SMA Straight Male to SMA Straight Male, 75cm	1.19
2121-DKF-M0100	DKF metric assembly, SMA Straight Male to SMA Straight Male, 100cm	1.50
2121-DKF-M0120	DKF metric assembly, SMA Straight Male to SMA Straight Male, 120cm	1.75
2121-DKF-M0150	DKF metric assembly, SMA Straight Male to SMA Straight Male, 150cm	2.12

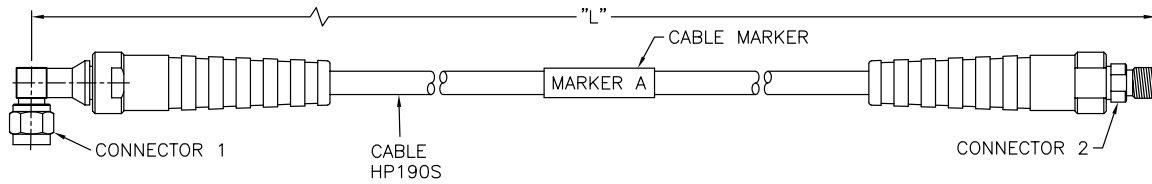

Materials

Connector Body & Coupling Nut	Passivated stainless steel
Connector Contacts	Gold plated beryllium copper
Cable	HP190S model, FEP jacket
Workmanship	Class 2 per IPC/WHMA-A-620

Environmental

Operating Temperature	-55°C to 85°C
-----------------------	---------------

Electrical

Frequency of Operation	DC-18 GHz
Impedance	50Ω (Nominal)
VSWR	1.25:1 (max.) for parts listed in table 1, see table 2 for other configurations
Insertion loss	See table 1 for standard lengths

Mechanical

Length Tolerance	-0.0 / +1.2 cm for parts listed in table 1
Durability	500 cycles (min.)
Inside min bend radius	2.8 cm

Custom Part Number Creation

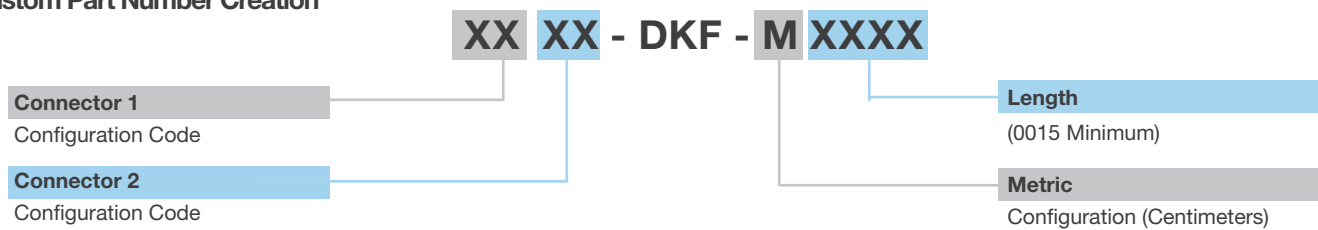


Table 2

	Configuration Code	Description	VSWR, max. @ 18 GHz
Connector 1	21	SMA, Straight, Male	1.25
	22	SMA, Right Angle, Male	1.30
Connector Selection Order	23	SMA, Straight, Female	1.25
	51	N, Straight, Male	1.35
Connector 2	52	N, Right Angle, Male	1.35
	53	N, Straight, Female	1.35

*See the website for drawing for more details.



Asia-Pacific
+86 21 5442 7668
ccs.asia.sales@as.cinch.com

Europe, Middle East
+44 (0) 1245 342060
CinchConnectivity@eu.cinch.com

North America
+1 507 833 8822
ccsorders@us.cinch.com

belfuse.com/cinch

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)